

Platinum temperature sensor in thin-film technology


M 310

M-series platinum temperature sensors are characterized by long-term stability, excellent precision over a wide temperature range and compatibility. They are used particularly for applications with high consumption volumes, typically in the automotive, white goods, HVAC and energy generation industries as well as in medical and industrial appliances and machinery.

Nominal Resistance R ₀	Tolerance DIN EN 60751 1996-07	Tolerance DIN EN 60751 2009-05	Order Number Plastic Box
100 Ohm at 0°C	Class B	F 0.3	32 208 721
1000 Ohm at 0°C	Class B	F 0.3	32 208 723
1000 Ohm at 0°C	Class A	F 0.15	32 208 727

The measuring point for the nominal resistance is defined at 8mm from the end of the sensor body.

Specification	DIN EN 60751
Temperature range	-70°C to +500°C (continuous operation) (temporary use to 550°C possible) Tolerance Class B: -70°C to +500°C Tolerance Class A: -50°C to +300°C
Temperature coefficient	TCR = 3850 ppm/K
Leads	Pt clad Ni- wire Recommend connection technology: Welding, Crimping and Brazing
Lead lengths (L)	10mm ±1mm
Long-term stability	Max. R ₀ drift 0.04% after 1000h at 500°C
Vibration resistance	At least 40g acceleration at 10 to 2000 Hz, depends on installation
Shock resistance	At least 100g acceleration with 8 ms half sine wave, depends on installation
Ambient conditions	Use unprotected only in dry environments
Insulation resistance	> 100 MΩ at 20°C; > 2 MΩ at 500°C
Self heating	0.4 K/mW at 0°C
Response time	Water current (v= 0.4m/s): Air flow (v= 2m/s):
	t _{0.5} = 0.04s t _{0.9} = 0.12s t _{0.5} = 2.5s t _{0.9} = 8.0s
Measuring current	100Ω: 0.3 to 1.0 mA 1000Ω: 0.1 to 0.3 mA (self heating has to be considered)
Note	Other tolerances, values of resistance and wire lengths are available on request.

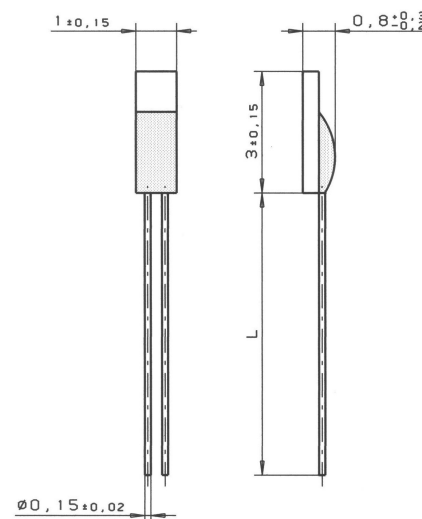

We reserve the right to make alterations and technical data printed. All technical data serves as a guideline and does not guarantee particular properties to any products.

Heraeus Sensor Technology USA

1901 Route 130
North Brunswick, NJ 08902
Phone 732-940-4400 Fax 732-940-4445
Email info.hst-us@heraeus.com
www.hst-us.com

Name of document: 30910017 Index B
Status: 10/2009

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Heraeus:

[32208730](#) [32208721](#) [32208731](#) [32208723](#) [32208725](#) [32208727](#)