

ZT Series Single and Dual Outputs — 1.5-3 Watts, Vertical Board Mount

Designed for Ultra Thin Profile, High Reliability, and Low Cost.

- Vertical Mounting
- High Quality — Field Failure Rate Less than 0.012%
- Wide Range Input Series: 4.5 to 72 VDC
- Over-Current Protection Circuitry
- Fully Regulated and Fully Isolated Between Input and Output
- Low EMI: Brass Die Cast Housing
- Five Year Warranty



Single Output (continued)



Stock No.	Mfr.'s Type	Wattage Approx.	Input Voltage	Output Volts/Amps	Dimensions W x H x D (In.)	EACH			Dimensions W x H x D (In.)			EACH			
						1-4	5-24	25-99	1-4	5-24	25-99	1-4	5-24	25-99	
800-2600	ZTS1R50505	1.5	5 (4.5-9)	5/0.300	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17
800-2615	ZTS1R51205	1.5	5 (4.5-9)	12/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-2625	ZTS1R51215	1.5	12 (9-18)	5/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-2630	ZTS1R51205	1.5	12 (9-18)	12/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-2635	ZTS1R52412	1.5	24 (18-36)	5/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-2660	ZTS05005	3.0	5 (4.5-9)	12/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-2685	ZTS1215	3.0	12 (9-18)	12/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-2690	ZTS2405	3.0	24 (18-36)	5/0.600	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-2695	ZTS2412	3.0	24 (18-36)	12/0.250	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13

Multiple Output

Stock No.	Mfr.'s Type	Wattage Approx.	Input Voltage	Output Volts/Amps	Dimensions W x H x D (In.)	EACH			Dimensions W x H x D (In.)			EACH			
						1-4	5-24	25-99	1-4	5-24	25-99	1-4	5-24	25-99	
800-2675	ZTW1R50515	1.5	5 (4.5-9)	±15	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17
800-2730	ZTW1R51212	1.5	12 (9-18)	±15	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17
800-2735	ZTW1R51215	1.5	12 (9-18)	±15	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17
800-2740	ZTW1R52412	1.5	24 (18-36)	±15	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17	15.96	1.10 x 0.82 x 0.39	18.28	17.17
800-2775	ZTW51215	3.0	12 (9-18)	±15	1.39 x 1.02 x 0.39	22.29	20.94	19.47	1.39 x 1.02 x 0.39	22.29	20.94	19.47	1.39 x 1.02 x 0.39	22.29	20.94
800-2780	ZTW52412	3.0	24 (18-36)	±15	1.39 x 1.02 x 0.39	22.29	20.94	19.47	1.39 x 1.02 x 0.39	22.29	20.94	19.47	1.39 x 1.02 x 0.39	22.29	20.94

ZU Series Single and Dual Outputs — 1.5-25 Watts, Board Mount

Designed for Ultra Thin Profile, High Reliability, and Low Cost.

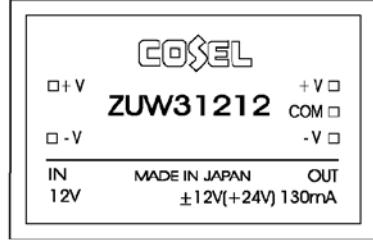

ZUW1R50515

ZUW31212

- Thinnest Industry Available Profile: 1.5-10 Watts — 0.28"; 15-25 Watts — 0.33"
- High Quality — Field Failure Rate Less than 0.012%
- Wide Range Input Series: 4.5 to 72 VDC
- Over-Current Protection Circuitry
- Fully Regulated and Fully Isolated Between Input and Output

Single Output

Stock No.	Mfr.'s Type	Wattage Approx.	DC Input Voltage	DC Output Volts/Amps	Dimensions W x H x D (In.)	EACH			Dimensions W x H x D (In.)			EACH			
						1-4	5-24	25-99	1-4	5-24	25-99	1-4	5-24	25-99	
800-3000	ZUS1R50505	1.5	5 (4.5-9)	5/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-3005	ZUS1R50512	1.5	5 (4.5-9)	12/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-3015	ZUS1R51205	1.5	12 (9-18)	5/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-3020	ZUS1R51212	1.5	12 (9-18)	12/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-3030	ZUS1R51215	1.5	12 (9-18)	15/0.100	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-3025	ZUS1R52405	1.5	24 (18-36)	5/0.300	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-3035	ZUS1R52412	1.5	24 (18-36)	12/0.130	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71	15.82	15.13
800-3040	ZUS1R52415	1.5	24 (18-36)	15/0.100	1.08 x 0.28 x 0.71	15.82	15.13	14.49	1.08 x 0.28 x 0.71						