

STRUCTURE Silicon Monolithic Integrated Circuit

PRODUCT CMOS-type Series Regulator

BU665xNUX Series

ABSOLUTE MAXIMUM RATINGS (Ta=25 °C)

Parameter	Symbol	Limit	Unit
Power Supply Voltage	VMAX	-0.3 ~ +6.5	V
Power Dissipation	Pd	660 (*1)	mW
Maximum Junction Temperature	TjMAX	+125	
Operating Temperature Range	Topr	-40 ~ +85	
Storage Temperature Range	Tstg	-55 ~ +125	

(*1) Pd derated at 6.6mW/ °C at temperatures above Ta = 25 °C, mounted on 70 x 70 x 1.6 mm glass-epoxy PCB.

RECOMMENDED OPERATING RANGE (not to exceed Pd)

Parameter	Symbol	Limit	Unit
Power Supply Voltage	VIN	2.5 ~ 5.5	V
Maximum Output Current	IMAX	200	mA

OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Input Capacitor	CIN	1.0 (*2)	2.2	-	µF	Ceramic Capacitor
Output Capacitor	COUT	0.5 (*2)	1.0	-	µF	recommended

(*2) Make sure that the output capacitor value is not kept lower than this specified level across a variety of temperature, DC bias, changing as time progresses characteristic.

Status of this document

The Japanese version of this document is the official specification.

Please use the translation version of this document as a reference to expedite understanding of the official version.

If there is any uncertainty in translation version of this document, official version takes priority.

ELECTRICAL CHARACTERISTICS

Ta=25 , VIN=VOUT+1.0V (VOUT=1.5V, 1.8V : VIN=3.5V), STBY=1.5V, CIN=2.2 μ F, COUT=1.0 μ F, unless otherwise noted.
(VOUT=VOUT1,VOUT2,VOUT3, STBY=STBY1,STBY2,STBY3)

Parameter	Symbol	Limit			Unit	Conditions
		Min	Typ	Max		
[Overall Device]						
Output Voltage	VOUT	VOUT \times 0.99	VOUT	VOUT \times 1.01	V	IOUT=10 μ A , VOUT 2.5V
		VOUT-25mV		VOUT+25mV		IOUT=10 μ A , VOUT < 2.5V
Operating Current	IIN1	-	40	95	μ A	IOUT=0mA STBY \times 1=1.5V, STBY \times 2=0V
	IIN2	-	80	190	μ A	IOUT=0mA STBY \times 2=1.5V, STBY \times 1=0V
	IIN3	-	120	285	μ A	IOUT=0mA STBY \times 3=1.5V
Operating Current (STBY)	ISTBY	-	-	1.0	μ A	STBY=0V
Ripple Rejection Ratio	RR	55	70	-	dB	VRR=-20dB _V , fRR=1kHz, IOUT=10mA VOUT=1.5V, 1.8V
			65			VRR=-20dB _V , fRR=1kHz, IOUT=10mA VOUT=2.8V
Dropout Voltage	VSAT	-	360	720	mV	VOUT=2.8V (VIN=0.98*VOUT, IOUT=200mA)
Line Regulation	VDL	-	2	20	mV	VIN=VOUT+1.0V to 5.5V, IOUT=10 μ A
Load Regulation	VDLO	-	10	80	mV	IOUT=0.01mA to 100mA
[Over Current Protection (OCP)]						
Limit Current	ILMAX	220	350	700	mA	Vo=VOUT*0.8
Short Current	ISHORT	20	70	150	mA	Vo=0V
[Standby Block]						
Discharge Resistor	RDSC	20	50	80		VIN=4.0V, STBY=0V
STBY Pin Pull-Down Resistor	RSTB	500	1000	2000	k	
Control Voltage	ON	VSTBH	1.5	-	μ V	Output Voltage ON
	OFF	VSTBL	-0.3	-	μ V	Output Voltage OFF


This product is not designed for protection against radioactive rays.

SERIES VOLTAGES

SERIES	VOUT1	VOUT2	VOUT3
BU6650NUX	2.8V	2.8V	1.8V
BU6651NUX	2.8V	1.8V	1.5V
BU6652NUX	2.8V	2.8V	1.5V
BU6653NUX	2.8V	1.8V	1.8V

BLOCK DIAGRAM and APPLICATION CIRCUIT

PACKAGE DIMENSIONS (VSON008X2030)

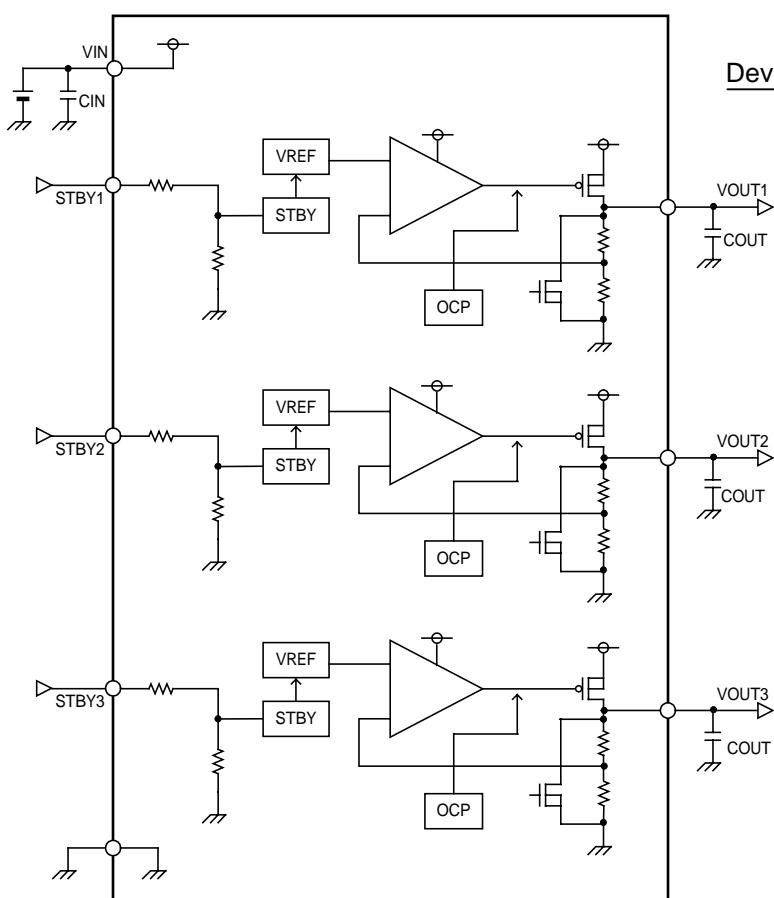

CIN $\cdots 2.2 \mu\text{F}$ (Ceramic Capacitor)
 COUT $\cdots 1.0 \mu\text{F}$ (Ceramic Capacitor)

Fig.1 Block Diagram and Application Circuit

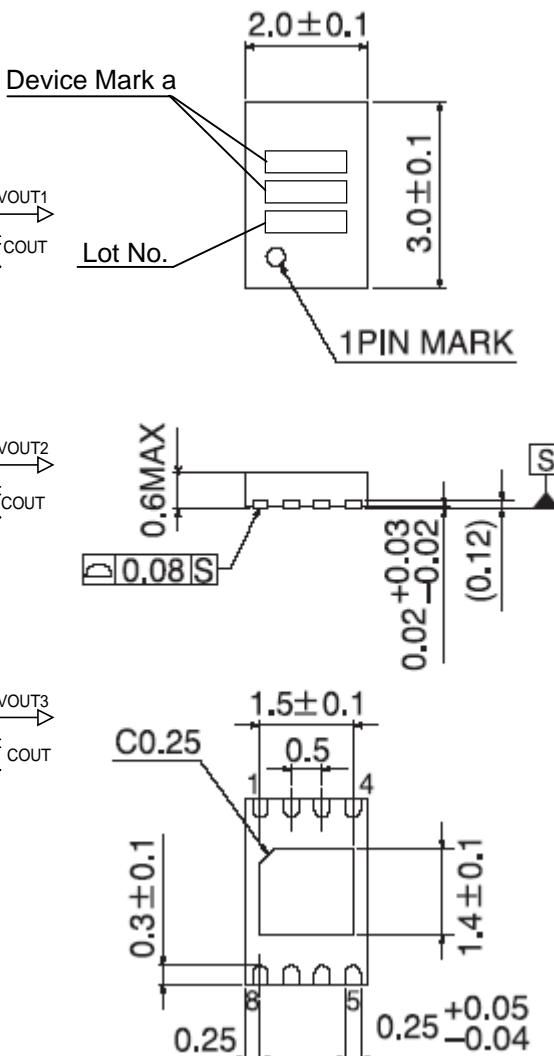


Fig.2 Package Dimensions (unit:mm)

TERMINAL PIN DESCRIPTION

PIN No.	PIN NAME	DESCRIPTION
1	VIN	INPUT Pin
2	STBY1	OUTPUT1 CONTROL Pin (High : ON, Low : OFF)
3	STBY2	OUTPUT2 CONTROL Pin (High : ON, Low : OFF)
4	STBY3	OUTPUT3 CONTROL Pin (High : ON, Low : OFF)
5	GND	GROUND Pin
6	VOUT3	OUTPUT3 Pin
7	VOUT2	OUTPUT2 Pin
8	VOUT1	OUTPUT1 Pin

Device Mark	
Series Name	Device Mark a
BU6650NUX	U 6 6 5 0
BU6651NUX	U 6 6 5 1
BU6652NUX	U 6 6 5 2
BU6653NUX	U 6 6 5 3

OPERATION NOTES

1.) Absolute maximum ratings

Use of the IC in excess of absolute maximum ratings (such as the input voltage or operating temperature range) may result in damage to the IC. Assumptions should not be made regarding the state of the IC (e.g. short mode or open mode) when such damage is suffered. If operational values are expected to exceed the maximum ratings for the device, consider adding protective circuitry (such as fuses) to eliminate the risk of damaging the IC.

2.) GND potential

The potential of the GND pin must be the minimum potential in the system in any operating conditions. Never connect a potential lower than GND to any pin, even if only transiently.

3.) Thermal design

Use a thermal design that allows for a sufficient margin for that package power dissipation rating (P_d) under actual operating conditions.

4.) Inter-pin shorts and mounting errors

Use caution when orienting and positioning the IC for mounting on printed circuit boards. Improper mounting or shorts between pins may result in damage to the IC.

5.) Operation in strong electromagnetic fields

Strong electromagnetic fields may cause the IC to malfunction. Caution should be exercised in applications where strong electromagnetic fields may be present.

6.) Common impedance

Wiring traces should be as short and wide as possible to minimize common impedance. Bypass capacitors should be used to keep ripple to a minimum.

7.) Voltage of STBY pin

To enable standby mode for all channels, set the STBY pin to 0.3 V or less, and for normal operation, to 1.5 V or more. Setting STBY to a voltage between 0.3 and 1.5 V may cause malfunction and should be avoided. Keep transition time between high and low (or vice versa) to a minimum.

Additionally, if STBY is shorted to VIN, the IC will switch to standby mode and disable the output discharge circuit, causing a temporary voltage to remain on the output pin. If the IC is switched on again while this voltage is present, overshoot may occur on the output. Therefore, in applications where these pins are shorted, the output should always be completely discharged before turning the IC on.

8.) Over-current protection circuit (OCP)

This IC features an integrated over-current and short-protection circuitry on the output to prevent destruction of the IC when the output is shorted. The OCP circuitry is designed only to protect the IC from irregular conditions (such as motor output shorts) and is not designed to be used as an active security device for the application. Therefore, applications should not be designed under the assumption that this circuitry will engage.

9.) Thermal shutdown circuit (TSD)

This IC also features a thermal shutdown circuit that is designed to turn the output off when the junction temperature of the IC exceeds 175°C. This feature is intended to protect the IC only in the event of thermal overload and is not designed to guarantee operation or act as an active security device for the application. Therefore, applications should not be designed under the assumption that this circuitry will engage.

10.) Input/output capacitor

Capacitors must be connected between the input/output pins and GND for stable operation, and should be physically mounted as close to the IC pins as possible (refer to figure 4). The input capacitor helps to counteract increases in power supply impedance, and increases stability in applications with long or winding power supply traces. The output capacitance value is directly related to the overall stability and transient response of the regulator, and should be set to the largest possible value for the application to increase these characteristics. During design, keep in mind that in general, ceramic capacitors have a wide range of tolerances, temperature coefficients and DC bias characteristics, and that their capacitance values tend to decrease over time. Confirm these details before choosing appropriate capacitors for your application. (Please refer to the technical note, regarding ceramic capacitor of recommendation)

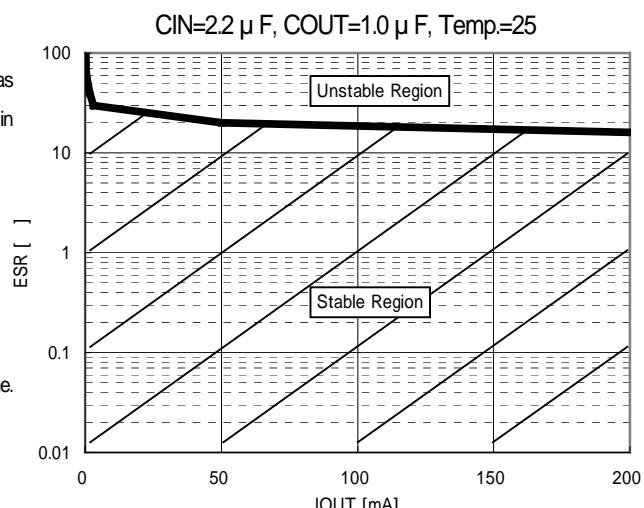


Fig.3 Stable Region (example)