




50W Single Output Switching Power Supply

NES-50 series

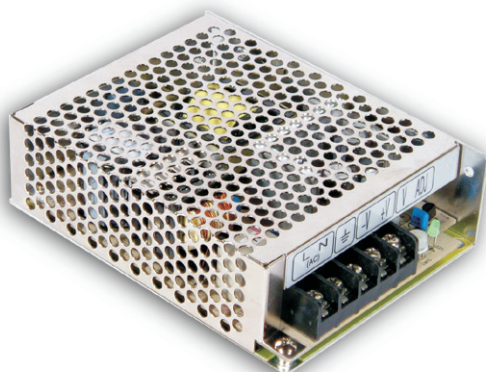

■ Features :

- Universal AC input/Full range
- Protections:Short circuit/Over load/Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty




SPECIFICATION

MODEL		NES-50-5	NES-50-12	NES-50-15	NES-50-24	NES-50-48
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	48V
	RATED CURRENT	10A	4.2A	3.4A	2.2A	1.1A
	CURRENT RANGE	0 ~ 10A	0 ~ 4.2A	0 ~ 3.4A	0 ~ 2.2A	0 ~ 1.1A
	RATED POWER	50W	50.4W	51W	52.8W	52.8W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	150mVp-p	200mVp-p	240mVp-p
	VOLTAGE ADJ. RANGE	4.75 ~ 5.5V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V	43.2 ~ 52.8V
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION Note.4	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION Note.5	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	500ms, 30ms/230VAC 1200ms, 30ms/115VAC at full load				
HOLD TIME (Typ.)	50ms/230VAC 10ms/115VAC at full load					
INPUT	VOLTAGE RANGE	85 ~ 264VAC 120 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	EFFICIENCY(Typ.)	79%	82%	83%	86%	87%
	AC CURRENT (Typ.)	1.1A/115VAC 0.65A/230VAC				
	INRUSH CURRENT (Typ.)	COLD START 45A				
	LEAKAGE CURRENT	<2mA / 240VAC				
PROTECTION	OVER LOAD	110 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25	27.6 ~ 32.4V	55.2 ~ 64.8V
		Protection type : Shut down o/p voltage, re-power on to recover				
ENVIRONMENT	WORKING TEMP.	-20 ~ +60℃ (Refer to output load derating curve)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 45℃)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
SAFETY & EMC (Note 6)	SAFETY STANDARDS	UL60950-1, CB(IEC60950-1) Approved				
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC				
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B				
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3				
OTHERS	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8,11, ENV50204, EN55024, EN61000-6-1 Light industry level, criteria A				
	MTBF	374.2K hrs min. MIL-HDBK-217F (25℃)				
	DIMENSION	129*98*38mm (L*W*H)				
	PACKING	0.41Kg; 45pcs/19.5Kg/1.24CUFT				
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Line regulation is measured from low line to high line at rated load. 5. Load regulation is measured from 0% to 100% rated load. 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.					

Mechanical Specification

Case No. 903 Unit:mm

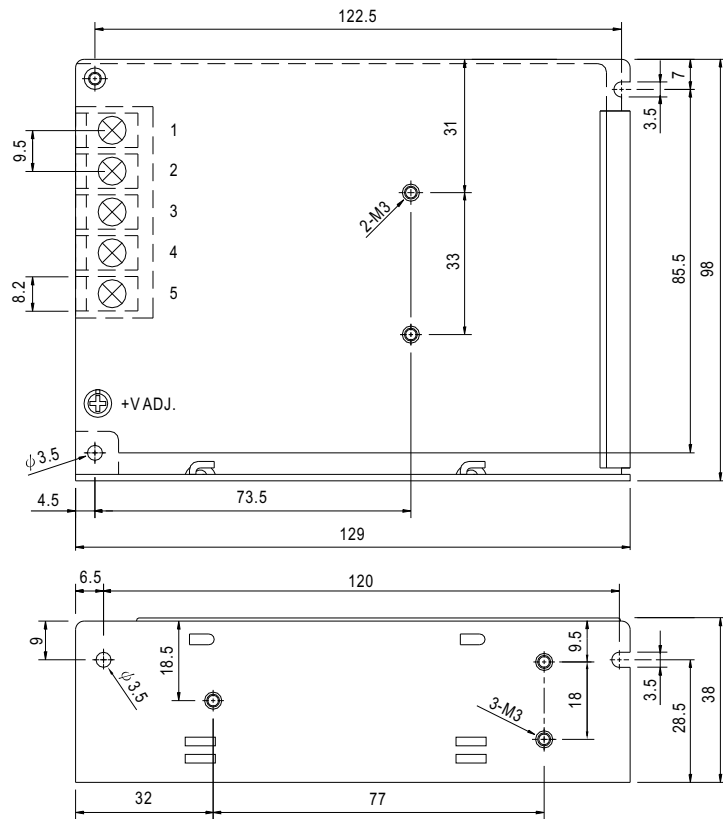


Terminal Pin. No Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	DC OUTPUT -V
2	AC/N	5	DC OUTPUT +V
3	FG $\perp$		



Block Diagram

fosc : 60KHz

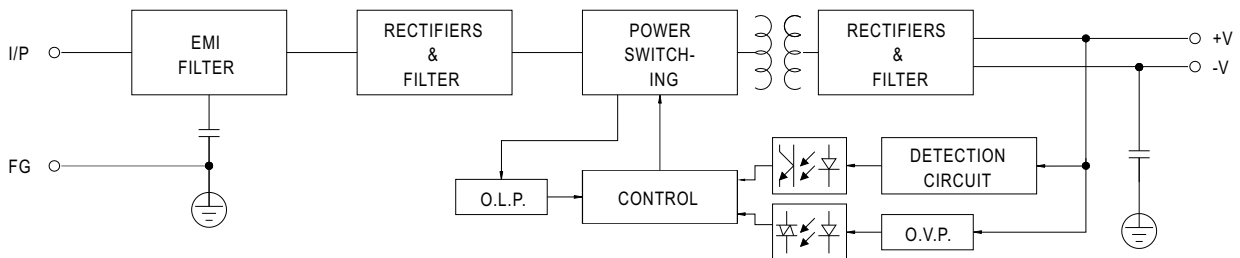

Derating Curve

Output Derating VS Input Voltage

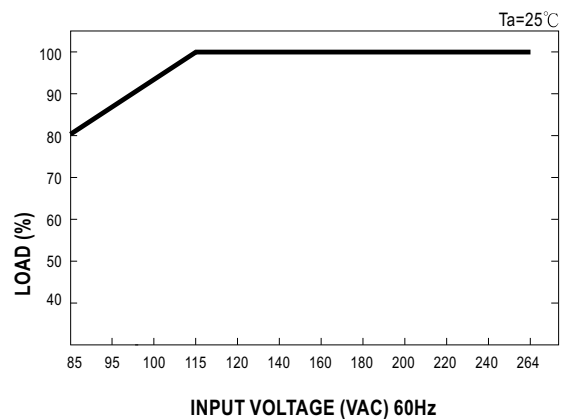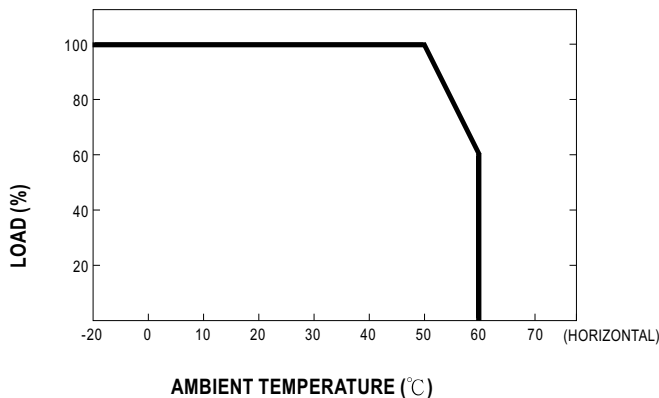

MODEL : NES-50-48

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1: 240 mVp-p (Max)	I/P: 230VAC O/P:FULL LOAD Ta:25℃	V1: 10 mVp-p (Max)	P
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 43.2V~ 52.8 V	I/P: 230 VAC I/P: 115 VAC O/P:MIN LOAD Ta:25℃	42.62 V~ 56.51 V/ 230 VAC 42.62 V~ 56.51 V/ 115 VAC	P
3	OUTPUT VOLTAGE TOLERANCE	V1: 1 %~ -1 % (Max)	I/P: 115 VAC / 264 VAC O/P:FULL/ MIN LOAD Ta:25℃	V1: 0.1 %~ -0.1 %	P
4	LINE REGULATION	V1: 0.5 %~ -0.5 % (Max)	I/P: 115 VAC ~ 264 VAC O/P:FULL LOAD Ta:25℃	V1: 0.03 %~ -0.03 %	P
5	LOAD REGULATION	V1: 0.5 %~ -0.5 % (Max)	I/P: 230 VAC O/P:FULL ~MIN LOAD Ta:25℃	V1: 0.06 %~ -0.06 %	P
6	SET UP TIME	230VAC: 500 ms (Max) 115 VAC: 1200 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 202 ms 115VAC/ 579 ms	P
7	RISE TIME	230VAC: 30 ms (Max) 115VAC: 30 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 17 ms 115VAC/ 17 ms	P
8	HOLD UP TIME	230VAC: 50 ms (TYP) 115VAC: 10 ms (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25℃	230VAC/ 92 ms 115VAC/ 21 ms	P
9	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25℃	TEST: <5 %	P
10	DYNAMIC LOAD	V1: 4800 mVp-p	I/P: 230 VAC O/P:FULL /Min LOAD 90%DUTY/1KHZ Ta:25℃	115 mVp-p	P

INPUT FUNCTION TEST

N O	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	85VAC~264 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	58 V~264V	P
			I/P: LOW-LINE-3V= 82V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE OSC	I/P: 85VAC ~ 264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK	P
3	EFFICIENCY	87 % (TYP)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	87.6 %	P
4	INPUT CURRENT	230V/ 0.65 A (TYP) 115V/ 1.1 A (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 0.59 A/ 230 VAC I = 0.91 A/ 115 VAC	P
5	INRUSH CURRENT	230V/ 45 A (TYP) COLD START	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 42 A/ 230 VAC	P
6	LEAKAGE CURRENT	< 2 mA / 240 VAC	I/P: 254 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.4 mA N-FG: 0.4 mA	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	110 %~ 150 %	I/P: 230 VAC I/P: 115 VAC O/P:TESTING Ta:25°C	140 %/ 230 VAC 140 %/ 115 VAC Hiccup Mode	P
2	OVER VOLTAGE PROTECTION	CH1: 55.2 V~ 64.8 V	I/P: 230 VAC I/P: 115 VAC O/P:MIN LOAD Ta:25°C	62.3 V/ 230 VAC 62.3 V/ 115 VAC Shunt down Re- power ON	P
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264 VAC O/P:FULL LOAD Ta:25°C	NO DAMAGE Hiccup Mode	P

ENVIRONMENT TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT																																																																																
1	TEMPERATURE RISE TEST	MODEL : NES-50-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 29.4 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 57.9 °C <table><thead><tr><th>NO</th><th>Position</th><th>P/N</th><th>ROOM AMBIENT Ta= 29.4 °C</th><th>HIGH AMBIENT Ta= 57.9 °C</th></tr></thead><tbody><tr><td>1</td><td>LF1</td><td>LF-133</td><td>50.8°C</td><td>73.2°C</td></tr><tr><td>2</td><td>BD1</td><td>D3SB60 4A/600V SHI</td><td>62.2°C</td><td>83.4°C</td></tr><tr><td>3</td><td>C5</td><td>100U/400V CAPX 85°C</td><td>56.8°C</td><td>78.0°C</td></tr><tr><td>4</td><td>D1</td><td>STTA406 4A/600V ST</td><td>68.2°C</td><td>90.2°C</td></tr><tr><td>5</td><td>R4</td><td>P6KE150A</td><td>69.1°C</td><td>90.2°C</td></tr><tr><td>6</td><td>Q1</td><td>K2628 6A/600V</td><td>62.0°C</td><td>86.4°C</td></tr><tr><td>7</td><td>U1</td><td>1203P</td><td>58.6°C</td><td>81.8°C</td></tr><tr><td>8</td><td>T1 COIL</td><td>TF-1013</td><td>71.5°C</td><td>93.0°C</td></tr><tr><td>9</td><td>C36</td><td>100U/35V RUB 105°C YXF</td><td>52.6°C</td><td>76.7°C</td></tr><tr><td>10</td><td>D100</td><td>BYQ28X-200 10A/200V PH</td><td>53.0°C</td><td>76.8°C</td></tr><tr><td>11</td><td>C105</td><td>330U/35V CAPX 105°C GL</td><td>52.7°C</td><td>76.1°C</td></tr><tr><td>12</td><td>R105</td><td>1.2KΩ/2W R/MO</td><td>58.2°C</td><td>83.6°C</td></tr><tr><td>13</td><td></td><td></td><td>°C</td><td>°C</td></tr><tr><td>14</td><td></td><td></td><td>°C</td><td>°C</td></tr><tr><td>15</td><td></td><td></td><td>°C</td><td>°C</td></tr></tbody></table>			NO	Position	P/N	ROOM AMBIENT Ta= 29.4 °C	HIGH AMBIENT Ta= 57.9 °C	1	LF1	LF-133	50.8°C	73.2°C	2	BD1	D3SB60 4A/600V SHI	62.2°C	83.4°C	3	C5	100U/400V CAPX 85°C	56.8°C	78.0°C	4	D1	STTA406 4A/600V ST	68.2°C	90.2°C	5	R4	P6KE150A	69.1°C	90.2°C	6	Q1	K2628 6A/600V	62.0°C	86.4°C	7	U1	1203P	58.6°C	81.8°C	8	T1 COIL	TF-1013	71.5°C	93.0°C	9	C36	100U/35V RUB 105°C YXF	52.6°C	76.7°C	10	D100	BYQ28X-200 10A/200V PH	53.0°C	76.8°C	11	C105	330U/35V CAPX 105°C GL	52.7°C	76.1°C	12	R105	1.2KΩ/2W R/MO	58.2°C	83.6°C	13			°C	°C	14			°C	°C	15			°C	°C	P
NO	Position	P/N	ROOM AMBIENT Ta= 29.4 °C	HIGH AMBIENT Ta= 57.9 °C																																																																																	
1	LF1	LF-133	50.8°C	73.2°C																																																																																	
2	BD1	D3SB60 4A/600V SHI	62.2°C	83.4°C																																																																																	
3	C5	100U/400V CAPX 85°C	56.8°C	78.0°C																																																																																	
4	D1	STTA406 4A/600V ST	68.2°C	90.2°C																																																																																	
5	R4	P6KE150A	69.1°C	90.2°C																																																																																	
6	Q1	K2628 6A/600V	62.0°C	86.4°C																																																																																	
7	U1	1203P	58.6°C	81.8°C																																																																																	
8	T1 COIL	TF-1013	71.5°C	93.0°C																																																																																	
9	C36	100U/35V RUB 105°C YXF	52.6°C	76.7°C																																																																																	
10	D100	BYQ28X-200 10A/200V PH	53.0°C	76.8°C																																																																																	
11	C105	330U/35V CAPX 105°C GL	52.7°C	76.1°C																																																																																	
12	R105	1.2KΩ/2W R/MO	58.2°C	83.6°C																																																																																	
13			°C	°C																																																																																	
14			°C	°C																																																																																	
15			°C	°C																																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 125 % LOAD Ta:25°C	TEST : OK	P																																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 230 VAC O/P: 100 % LOAD Ta= -20°C	TEST : OK	P																																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P: 272 VAC O/P:FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK	P																																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~45°C)	I/P: 230 VAC O/P:FULL LOAD	± 0.01 %(0~50°C)	P																																																																																
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency:10~500Hz (3) Sweep Time:10min/sweep cycle (4) Acceleration:2G (5) Test Time:1 hour in each axis (X.Y.Z) (6) Ta:25°C		TEST : OK	P																																																																																

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 3 KVAC/min I/P-FG: 1.5 KVAC/min O/P-FG: 0.5 KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 1.8 KVAC/min O/P-FG: 0.6 KVAC/min Ta:25°C	I/P-O/P: 4.06 mA I/P-FG: 3.24 mA O/P-FG: 2.51 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 12 GΩ I/P-FG: 10 GΩ O/P-FG: 14 GΩ NO DAMAGE	P
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25°C	5 mΩ	P
4	APPROVAL	TUV: Certificate NO : UL: File NO : E183223			P

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS	P
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab	P
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab	P
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N :1KV L,N-PE:2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	P
7	Test by certified Lab & Test Report Prepare				

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT I/P: 230VAC O/P:FULL LOAD Ta= 25 °C LIFE TIME= 276695 HRS I/P: 230VAC O/P:FULL LOAD Ta= 50 °C LIFE TIME= 69676 HRS			P
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE: 374.2 HRS			P

COMPONENT STRESS TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated K2545 : 600V 6 A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25℃	(1) 520 V (2) 526 V (3) 544 V	P
2	Diode Peak Voltage	D100 Rated FCF10A40 : 400V 10A	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Full Load (3)Output Short Ta:25℃	(1) 149 V (2) 164 V (3) 143 V	P
3	Clamp Diode Peak Voltage	D1 Rated STTA406 : 600 V 4A	I/P:High-Line +3V = 267 V O/P: (1)Full Load (2) Dynamic Load 90%Duty/1KHz Ta:25℃	(1) 504 V (2) 504 V	P
4	Input Capacitor Voltage	C5 Rated : 100u /400V/ 85℃	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change (4)Burn in 1hour Ta:25℃	(1) 380 V (2) 380 V (3) 380 V (4) 376 V	P
5	Control IC Voltage Test	U1 Rated 1203 : 18V	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta:25℃	(1) 13.3 V (2) 13.3 V (3) 12.2 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2005/3/21	RD SAMPLE	PASS	VINCENT TSENG	MAX LIN
2005/7/8	PRODUCT SAMPLE	PASS	VINCENT TSENG	MAX LIN

2003/12/12 A50-F023