

ENERGIZER 13 size - **Mercury Free**


ZnAir



(top view) (bottom view)

Industry Standard Dimensions

mm (inches)

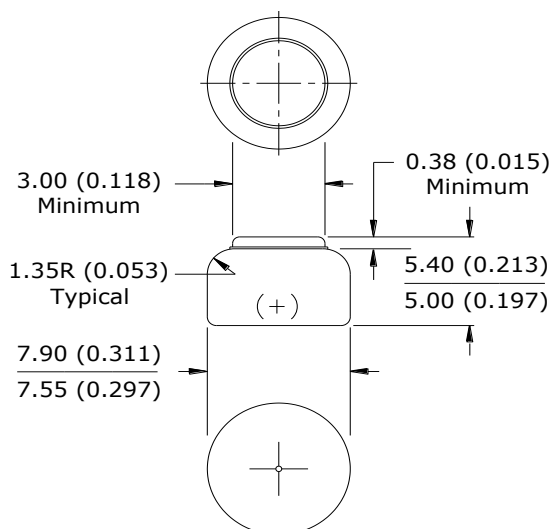


Specifications

Chemical System:	Zinc Air (Zn/O_2)
Tab Color:	Orange
Designation:	ANSI-7000ZD, IEC-PR48
Nominal Voltage:	1.4 Volts
Typical Capacity:	280 mAh (to 0.9 volts) (Rated at 1.5k ohms at 21°C/50% RH)
Typical Weight:	0.8 grams (0.03 oz.)
Typical Volume:	0.03 cubic centimeters (0.02 cubic inch)


Typical Discharge Characteristics

IEC Industry Standards / Standard Test Protocol
(6/2 mA .1S/1H59M 59.9S 12H at 21C)

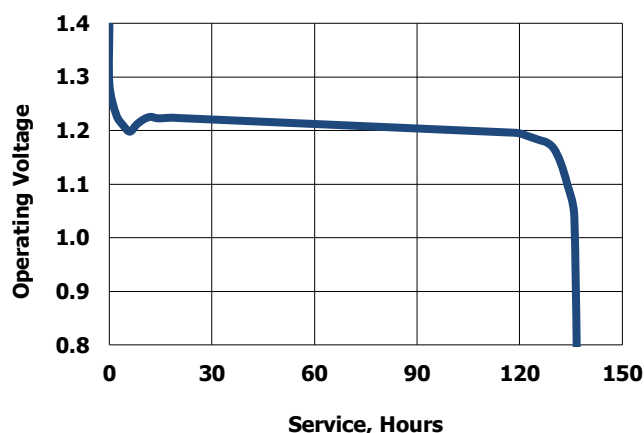


Typical Discharge Characteristics

ANSI/IEC Industry Standards / Intermittent Test Protocol
(1.5K ohm 12 hours per day at 21C)

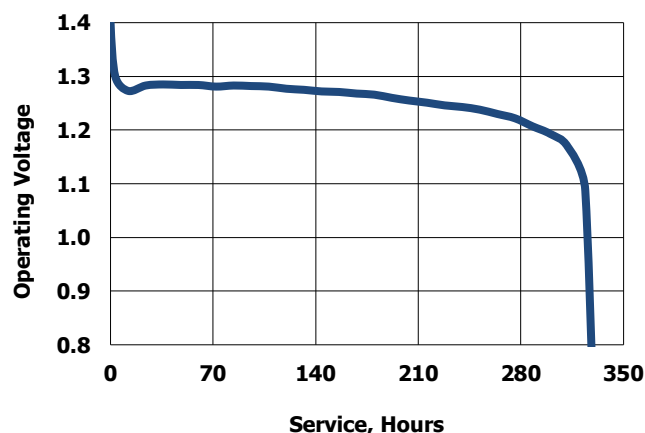

Typical Discharge Characteristics

IEC Industry Standards / High Drain Test Protocol
(12/3 mA .1S/1H59M 59.9S 12H at 21C)

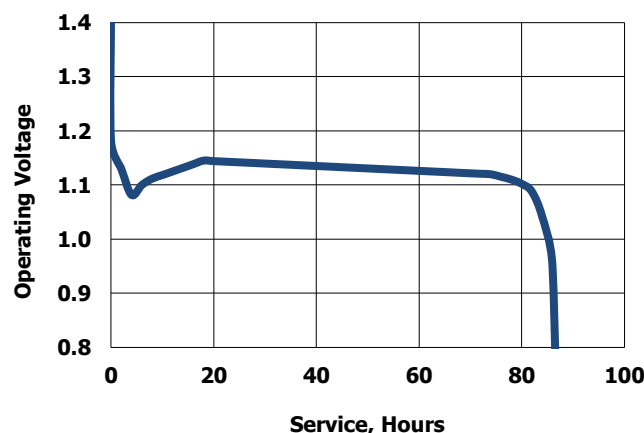

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Energizer:](#)

[AC13E-4](#)