
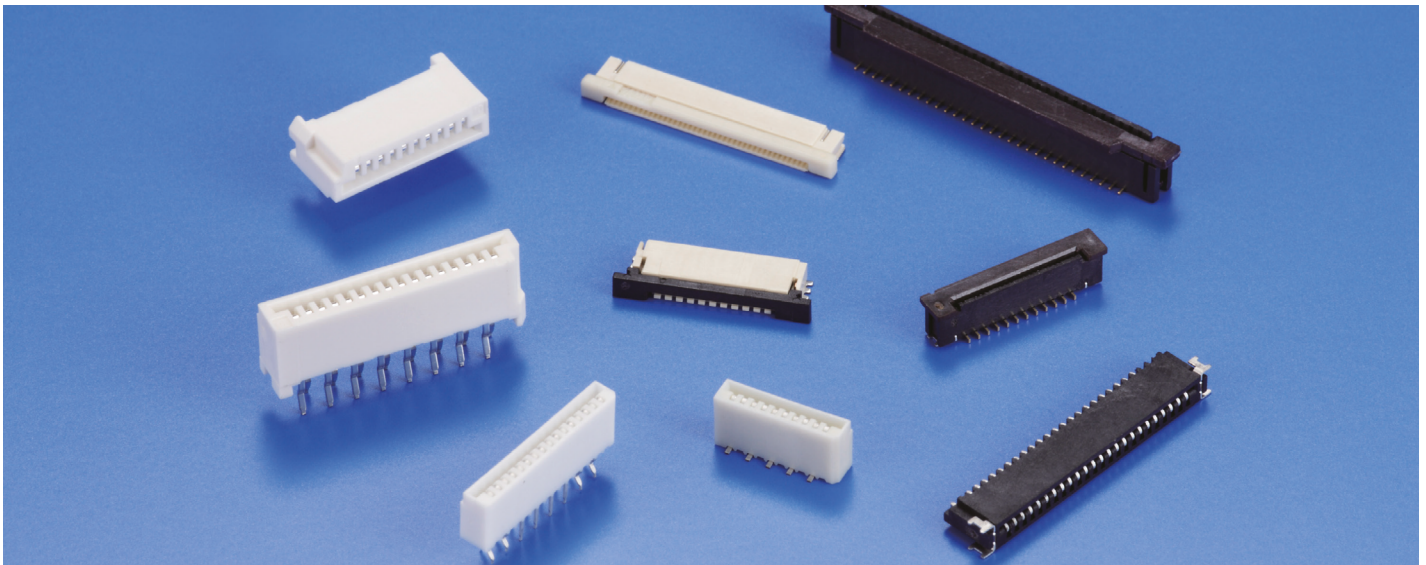
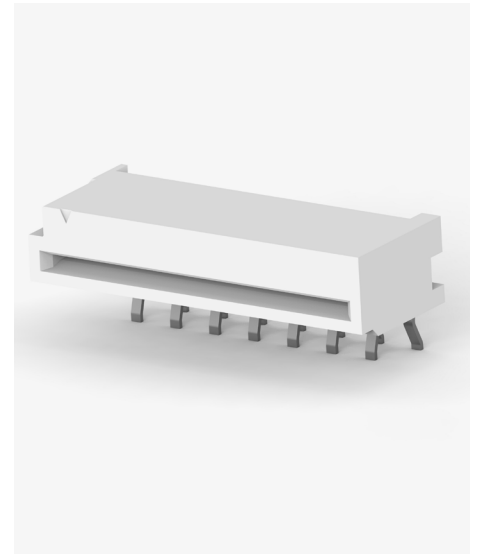


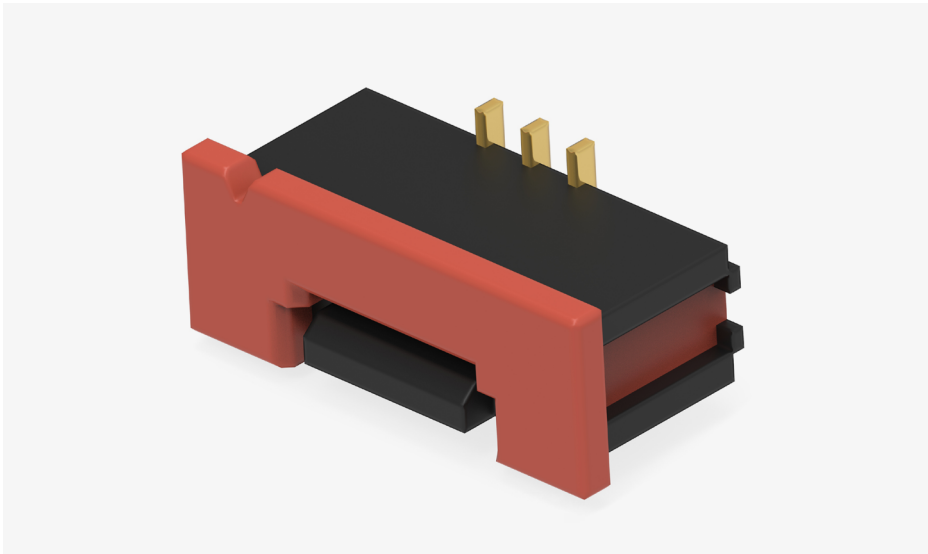

STANDARD FLEXIBLE PRINTED CIRCUIT (FPC) CONNECTORS - 0.25MM, 0.3MM, 0.5MM, 1.0MM & 1.25MM PITCH

Quick Reference Guide

As the demands for higher-density packaging of electronic equipment increase, the use of flexible printed circuits (FPC) to reduce size, weight and assembly costs has expanded.

As with our fine pitch FPC product, our larger pitch FPC connectors are also an ideal solution for routing signal through your device when standard wire-to-board products are too large or impractical. Set on larger centerline pitch, these FPC products are generally found in larger mobile devices such as hand-held scanners, cameras and GPS units; as well as in larger applications such as set-top boxes, business equipment and industrial controls.

FPC interconnects of this size are also commonly found on devices that have low-definition displays, touch panels or screens. This makes it very easy to identify potential FPC interconnect opportunities.



TE Connectivity's FPC solutions are available in 0.25mm, 0.3mm, 0.5mm, 1.0mm and 1.25mm centerline spacing.

FEATURES AND BENEFITS

- Multiple Centerline Spacing Options
- ZIF and non-ZIF Versions Available
- Top and Bottom Contact Options
- Requires No Application Tooling


PRODUCT APPLICATIONS

- Consumer Electronics
 - Hand-Held Scanners
 - POS Devices / Payment
- Terminals
 - Set-Top Boxes
 - PCs
 - PC Peripherals
- Business Equipment
- Industrial Equipment
 - Industrial Controls
 - Gas Pumps
 - ATMs
 - Slot Machines
- Medical Equipment

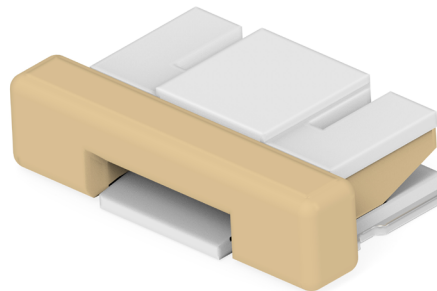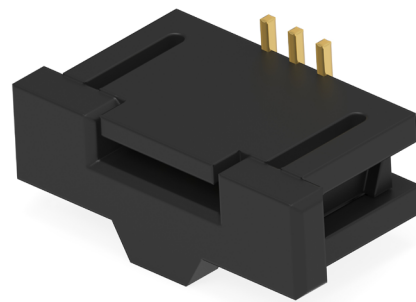

BASIC INFORMATION


Multiple Centerlines

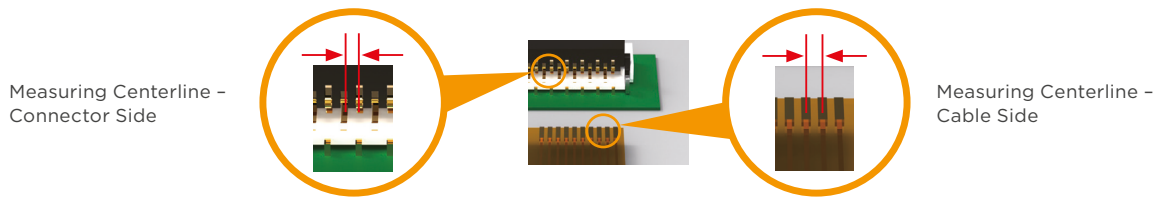

Centerline can be measured many different ways; however, in general, it is simply the spacing between the center of one contact and the center of its neighboring contact.

Here you can see an example of the centerline spacing on an FPC connector and the centerline spacing on a flexible printed circuit cable.

ZIF AND NON-ZIF

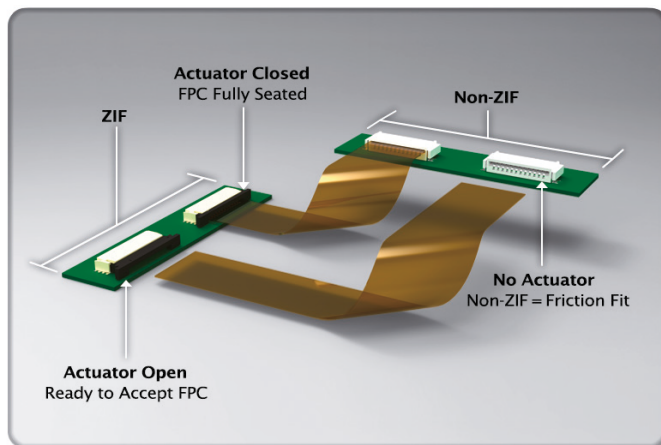

ZIF Connectors

- Use an actuator to secure the flex cable
- Less wear on contacts
- Increase mating cycle count
- Provide added retention
- Better for high vibration environments

Non-ZIF Connectors

- Use friction to secure the flex cable
- Lower mating cycle count
- Better for static applications
- Smaller and lighter weight than equivalent ZIF counterpart
- Take up less board real-estate
- Typically less expensive than equivalent ZIF counterpart

Many of our larger pitch ZIF-style FPC connectors use a stuffer-type actuator [See Below]. Stuffer actuators use a slightly different method to secure an FPC cable into the connector than the flip-lock versions [For flip-lock versions, see Fine Pitch FPC Connector Quick Reference Guide, document number 8-1773459-2].



Upper(Top) Contact Lower(Bottom) Contact

FPC FPC

Contact Point

[illegible]

TE CONNECTIVITY / DATA AND DEVICES / STANDARD FLEXIBLE PRINTED CIRCUIT (FPC) CONNECTORS

0.5MM PITCH (ZIF)

Orientation	Contact Type	PCB Mount	Actuator Style	Plating	Features	Image	Base Pn	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30																														
								31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60																														
Right Angle	Top	SMT	Stuffer	"GOLD FLASH"	"NARROW BODY"		1734839	POSITION SIZE																																																											
													5	6	7	8	9	10	11	12			14	15	16	17	18	19	20	21			23	24	25		27			29	30																										
VERTICAL	N/A	SMT	STUFFER	GOLD FLASH	TYPE A LAYOUT*		1734741	31						36	37			40	41			43	44		46	47	48	49	50																																						
VERTICAL	N/A	SMT	STUFFER	GOLD FLASH	TYPE B LAYOUT*		1734742	31	32	33	34	35	36	37	38	39	40																																																		
VERTICAL	N/A	SMT	STUFFER	GOLD FLASH	TYPE B LAYOUT*		1734742	31	32	33	34	35	36	37	38	39	40																						30																												
RIGHT ANGLE	BOTTOM	SMT	STUFFER	GOLD FLASH	N/A		1734592						5	6	7	8		10	11	12	13	14			16	17	18	19	20	21	22	23	24	25	26	27		30																													
								31			34		36		38	39	40	41		43				47		49	50																																								
RIGHT ANGLE	DUAL CONTACT	SMT	BACK FLIP-LOCK	GOLD FLASH	LOW PROFILE 2328702		2328702				4		6		8		10							16							24																																				

1.0MM PITCH (ZIF)

ORIENTATION	CONTACT TYPE	PCB MOUNT	ACTUATOR STYLE	PLATING	FEATURES	IMAGE	BASE PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
								31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
								POSITION SIZE																													
VERTICAL	N/A	SMT	STUFFER	GOLD FLASH	N/A		1734248			3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22		24	25	26	27	28	29	30
RIGHT ANGLE	TOP	SMT	STUFFER	TIN	N/A		84953				4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
RIGHT ANGLE	BOTTOM	SMT	STUFFER	TIN	N/A		84952				4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
RIGHT ANGLE	BOTTOM	SMT	STUFFER	GOLD FLASH	N/A		1735265				4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30

1.0MM PITCH (NON ZIF)

Orientation	Contact Type	PCB Mount	Actuator Style	Plating	Features	Image	Base Pn	Position Size																																																											
								1 31	2 32	3 33	4 34	5 35	6 36	7 37	8 38	9 39	10 40	11 41	12 42	13 43	14 44	15 45	16 46	17 47	18 48	19 49	20 50	21 51	22 52	23 53	24 54	25 55	26 56	27 57	28 58	29 59	30 60																														
Vertical	N/A	SMT	N/A	TIN	N/A		84982					4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30																													
Vertical	N/A	SMT	N/A	TIN	WITH MYLAR		1735042					4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30																													
Vertical	N/A	T/H	N/A	TIN	N/A		84984					4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30																													
RIGHT ANGLE	TOP	SMT	N/A	TIN	N/A		84981					4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30																													
RIGHT ANGLE	TOP	T/H	N/A	TIN	N/A		84983					4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30																													
RIGHT ANGLE	BOTTOM	SMT	N/A	TIN	N/A		1735360					4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30																													

1.25MM PITCH (NON-ZIF)

ORIENTATION	CONTACT TYPE	PCB MOUNT	ACTUATOR STYLE	PLATING	FEATURES	IMAGE	BASE PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
								31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
VERTICAL	N/A	T/H	N/A	TIN	N/A		84534	POSITION SIZE																													
											4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
								31	32	33	34	35	36	37	38	39	40																				
RIGHT ANGLE	TOP	T/H	N/A	TIN	N/A		84533	POSITION SIZE																													
											4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
								31	32	33	34	35	36	37	38	39	40																				

FREQUENTLY ASKED QUESTIONS

Question 1

Is there a pitch requirement for your interconnect need?

Answer 1

TE offers FPC products from 0.25mm to 1.25mm centerline spacing.

Question 2

Is your application in a high vibration environment?

Answer 2

ZIF version FPC interconnects have a greater retention force and are suitable for high vibration applications.

Question 3

Do you have a need for a higher number of mating cycles?

Answer 3

ZIF version FPC interconnects allow for a greater number of mating cycles via the use of an actuator.

Question 4

In your application, when the flex cable meets the board-mounted connectors, will the flex cable contact pads be face up or face down?

Answer 4

If face down, use bottom contact versions. If face up, use top contact versions.

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2024 TE Connectivity. All Rights Reserved.

Published 01-24