




Laserliner®

AC-Tracer



Cable tracer set with transmitter and receiver

Rev.0211

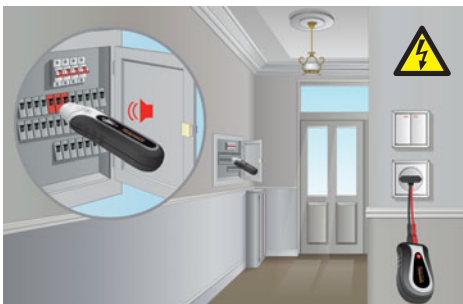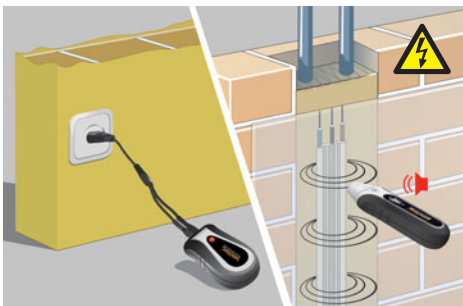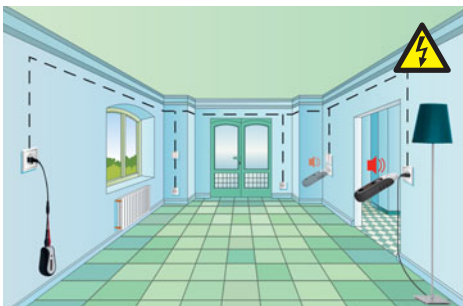

- **Non-contact tracing of the transmission signal** by the receiver
- **Fast tracing of coherent electrical circuits**
- **Location of lines** in coherent, live electrical circuits
- **Detection of fuse circuits** in live installations
- Receiver with audible signal tone for locating measured objects
- Transmitter power supply directly from power cable to be tested = **measurement under operating conditions**
- Receiver with adjustable sensitivity for optimum fine adjustment
- Socket adapter for direct and fast testing in building installations
- E27 lamp adapter for direct and fast testing in lamp circuits

TECHNICAL DATA

TRANSMITTER AC-TRACER TX

POWER SUPPLY

200-240V AC, 50-60 Hz

OVERVOLTAGE CATEGORY

CAT III 300V, pollution degree 2

DIMENSIONS (W x H x D)

50 x 80 x 32 mm

WEIGHT

54 g

RECEIVER AC-TRACER RECV

MEASURING RANGE

0...5 cm measuring depth

POWER SUPPLY

1 x 9V block, IEC LR6, Alkali

DIMENSIONS (W x H x D)

68 x 165 x 36 mm

WEIGHT (incl. battery)

155 g




AC-Tracer

including carrying case
+ transmitter TX
+ receiver RECV
+ Euro connector
+ UK plug
+ E 27 Lamp adapter
+ battery

Packing dimension (W x H x D)

330 x 210 x 70 mm

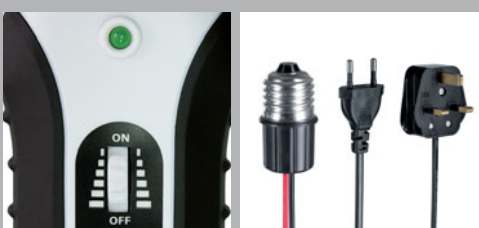

Adjustable sensitivity

Various connection options

ARTICLE	ARTICLE NO	EAN-CODE	PU
AC-Tracer	083.050A	4 021563 672103	5