Hex 8mm Male-Female Standoff

<< B23

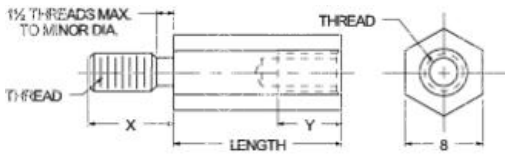

B25 >>

Lyn-Tron Part ID: **SS5177-30.0-01**

Qty in Stock: **5**

Get Pricing

Alternative Part Possibilities		
	Lyn-Tron Part ID	Qty In Stock
	SS5177-30.0-00	0
This color represents the identical unplated part.		

Conformity	
Conforming:	RoHS WEEE REACH DFARS
Non Conforming:	N/A
Download Conformity Stmt	

Other Available Options	
View	Material Specs
View	Finish App Summary
View	General Notes
Download	CAD Drawing
View CAD files with: Autodesk | Brava	

Code	Description
AA	Aluminum (RoHS Compliant)
AL	Aluminum
BR	Brass (RoHS Compliant)
SS	Stainless Steel (RoHS Compliant)
ST	Steel (RoHS Compliant)

Basic Part Number	Thread Size	"X" Length	"Y" Min. Full Thd Depth	Min. Body Length
5175	M3.5 x 0.6	6.35	9.53	12.7
5176	M4.0 x 0.7	9.53	11.1	15.0
5177	M5.0 x 0.8	9.53	12.7	16.5

Code	Length Value
32.0	32
33.0	33
35.0	35
37.0	37
38.0	38
40.0	40
41.0	41

Code	Plate Description pertaining to material SS
011	Passivate (Nitric) ASTM-A967-05
012	Passivate with 96 Hour Salt Spray ASTM-B-117 || 2 hour salt spray
01D	Passivate - #202 Thread Lock Dri Loc IFI 125 / 525
01E	Passivate with Electro Polish ASTM-A967-05
01H	Passivate + Heat Treat ASTM-A967-05
01P	Passivate with Nylon Patch ASTM-A967-05
01Q	Passivate with Nylon Pellet ASTM-A967-05
01S	Passivate with Marking Stamp ASTM-A967-05
01Y	Passivate Honeywell Approved ASTM-A 967 Rev 05
06	Passivate -- Type II SAE-AMS QQ-P-35C
52	Black Oxide - Stainless Steel -- Class 4 MIL-C-13924C
521	Black Oxide after Passivate -- Stainless Steel

© 1999-2015 Lyn-Tron, Inc. | 6001 S. Thomas Mallen Road Spokane Washington 99224 | Phone: 800-423-2734 or 509-456-4545 | Fax: 509-456-0946