

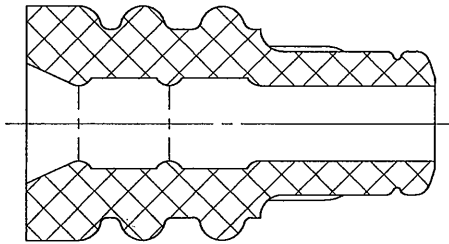


版数 REV.	年月日 DATE	DGN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	03/AUG/2009	068390	REDRAWN AND CORRECT AN ERROR	T. MORITA	N. KUROIWA	—	T. TOTANI
3	13/MAY/2011	072061	ADD THE LOGO OF "SPECIAL CONTROL ITEM"	—	N. KUROIWA	—	N. Orie

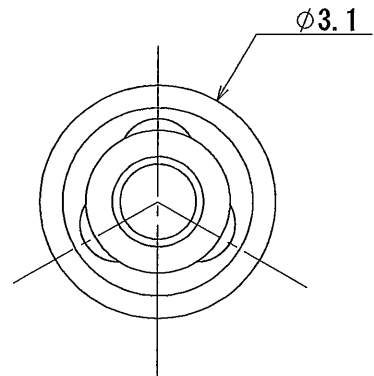

SECT A-A

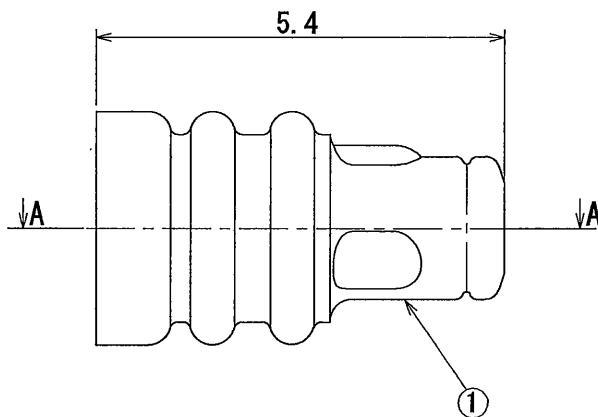

NOTE 1. APPLICABLE INSULATION OUTER DIA. : $\phi 1.4 \sim \phi 1.5$
(AVSS0.3sq)
注1. 適合被覆外径 $\phi 1.4 \sim \phi 1.5$ (AVSS0.3sq)

1	WIRE SEAL	1	SILICONE RUBBER 	—	COLOR: BULE		
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS		
仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		名称 (TITLE)			
JACS-10389		12/JUL/2007		MX44000XP1			
一般公差 (GENERAL TOLERANCE)		製図 DR.	T. MORITA	 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.			
寸法 (DIMENSION)	角度 (ANGLES)	担当 CHK.	Y. NAKAMURA				
		査閲 APPD.	—				
		承認 APPD.	T. TOTANI				
± 0.8	×° ±	 		図面番号 (DRAWING NO.)		版数 (REV.)	
± 0.4	×° ' ±			シリーズ (SERIES)			尺度 (SCALE)
± 0.1				MX44			
±				10 : 1			
				SJ107064		3	

S/W

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[MX44000XP1](#)