


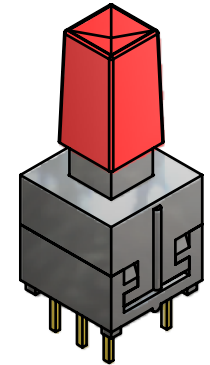



RECOMMENDED P.C.B. LAYOUT

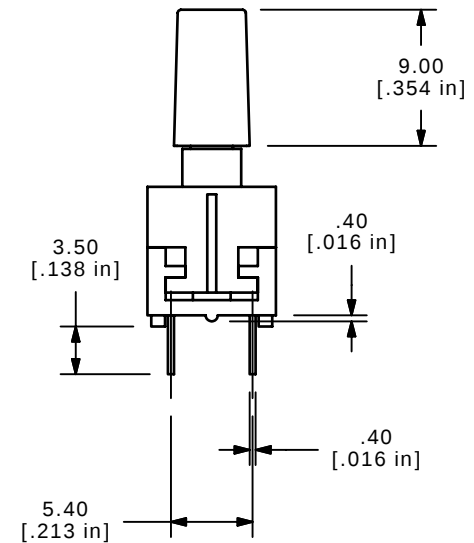

CIRCUIT: 2PDT

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
2-1,5-4	2-1,5-6
() = MOMENTARY	

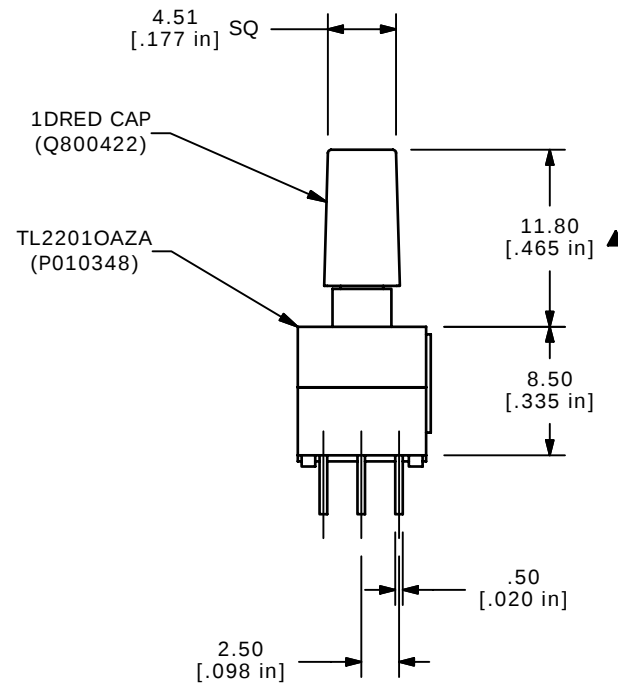

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x = ± 0.4
x.xx = ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A @30VDC
5. TRAVEL: 2.50 ± 0.38
6. OPERATING FORCE: 180 ± 50 GF
7. CONTACT RESISTANCE: 50mOHMS MAX. (INITIAL)
8. ELECTRICAL LIFE: >10,000 CYCLES
9. ▲ DENOTES CRITICAL PARAMETER
10. 2002/95/EC (ROHS) COMPLIANT

E-SWITCH®

TITLE TL2201OAZA1DRED

A	16187	NEW PART RELEASE	6/30/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	6/30/2006	CT	XP0290A	A