



July 2016

Chip beads

For general signal line

MMZ series (for automobiles)

MMZ1005 Type

MMZ1005

1005[0402 inch]*

* Dimensions code JIS[EIA]

Reminders for using these products

Before using these products, be sure to request the delivery specifications.

Safety reminders

Please pay sufficient attention to the warnings for safe designing when using this products.

Reminders

- The storage period is less than 12 months. Be sure to follow the storage conditions (temperature:5 to 40°C, humidity:10 to 75% RH or less).
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

Chip beads

For general signal line

Product compatible with RoHS directive
Halogen-free
Compatible with lead-free solders
AEC-Q200

Overview of MMZ1005 type

■ FEATURES

- Noise reduction solution for general signal line.
- Various frequency characteristics with 5 materials of different features for countermeasures against everything from general signals to high-speed signals.

■ APPLICATION

Various ECUs, powertrains, body controls, and car multimedia (telematics).

■ PART NUMBER CONSTRUCTION

MMZ	1005	S	800	C	T	D25
Series name	LxWxT dimensions (mm)	Material name	Impedance (Ω) at 100MHz	Characteristic type	Packaging style	Internal code
1005	1.0x0.5x0.5	B	800 80	C	T Taping	D25
		D	121 120			
		F				
		S				
		Y				

■ OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

Type	Temperature ranges		Package quantity	Individual weight
	Operating temperature (°C)	Storage temperature* (°C)	(pieces/reel)	(mg)
MMZ1005	-55 to +125	-55 to +125	10,000	1


* The storage temperature range is for after the circuit board is mounted.

- RoHS Directive Compliant Product: See the following for more details.<https://product.tdk.com/info/en/environment/rohs/index.html>
- Halogen-free: indicates that Cl content is less than 900ppm, Br content is less than 900ppm, and that the total Cl and Br content is less than 1500ppm.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MMZ1005 type

■ RECOMMENDED REFLOW PROFILE

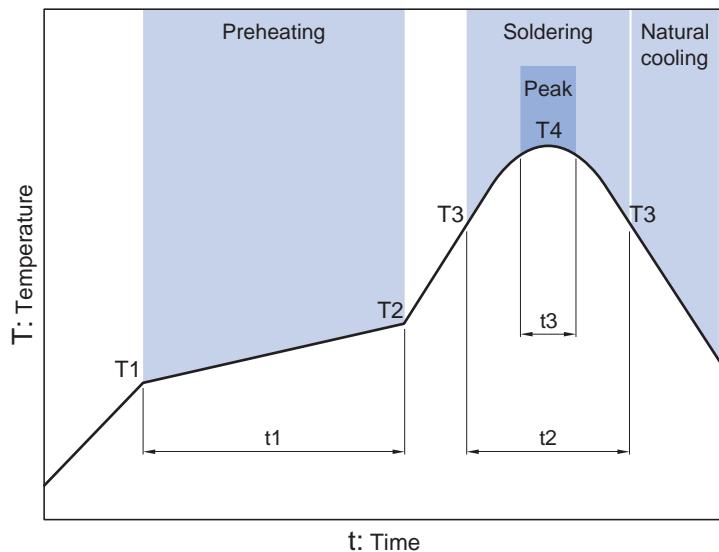

Preheating			Soldering		Peak	
Temp.	Temp.	Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	30 to 60s	250 to 260°C	10s

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MMZ1005 type

■ MATERIAL CHARACTERISTIC

B material: This type is perfectly suited for fast digital signals. By equalizing R components and X components that beads possess at a frequency of 5MHz, it is able to suppress overshooting, undershooting and ringing of fast digital signals.


S material: Standard type that features impedance characteristics similar to those of a typical ferrite core. For signal line applications in which the blocking region is near 100MHz. Impedance values selected for effectiveness at 40 to 300MHz.

Y material: High frequency range type intended for the 100MHz region and above. For signal line applications in which the signal frequency is far from the cutoff frequency. Impedance values selected for effectiveness at 80 to 400MHz.

D material: For applications calling for low insertion loss at low frequencies and sharply increasing impedance at high frequencies. Designed for high impedance at high frequencies (300MHz to 1GHz) for signal line applications.


F material: This new product inherits the characteristic of our D-material, namely its sharp impedance rise time, and its impedance peak frequency has been shifted higher into range. The product offers excellent noise suppression from 600MHz to as high as in the GHz range.

■ TYPICAL MATERIAL IMPEDANCE CHARACTERISTICS

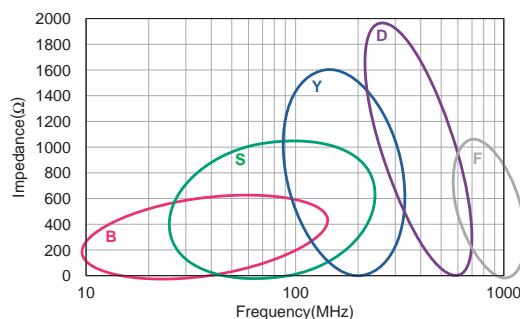



MMZ1005 type

■ SHAPE & DIMENSIONS

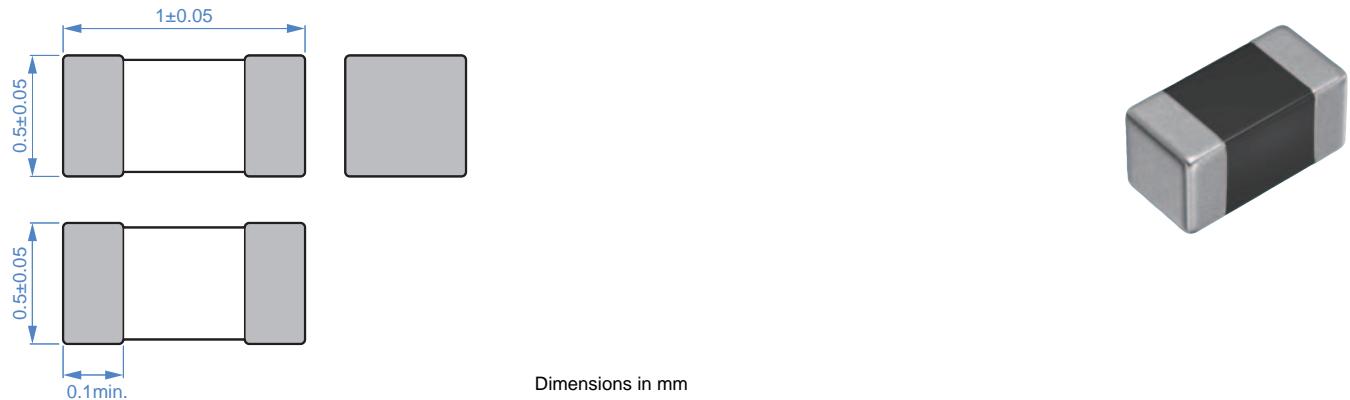

■ RECOMMENDED LAND PATTERN

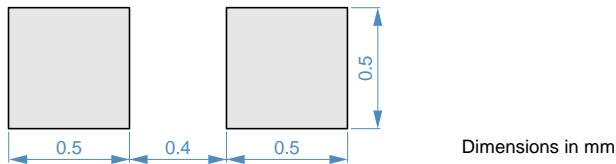

 Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MMZ1005 type

■ ELECTRICAL CHARACTERISTICS

□ CHARACTERISTICS SPECIFICATION TABLE

Impedance [100MHz] (Ω)	DC resistance (Ω)max.	Rated current (mA)max.	Part No.
80	±25%	0.19	MMZ1005B800CTD25
120	±25%	0.25	MMZ1005B121CTD25
600	±25%	0.85	MMZ1005B601CTD25
80	±25%	0.12	MMZ1005S800CTD25
120	±25%	0.22	MMZ1005S121CTD25
240	±25%	0.28	MMZ1005S241CTD25
600	±25%	0.52	MMZ1005S601CTD25
1000	±25%	0.75	MMZ1005S102CTD25
40	±25%	0.10	MMZ1005Y400CTD25
80	±25%	0.17	MMZ1005Y800CTD25
120	±25%	0.18	MMZ1005Y121CTD25
240	±25%	0.26	MMZ1005Y241CTD25
300	±25%	0.38	MMZ1005Y301CTD25
470	±25%	0.47	MMZ1005Y471CTD25
600	±25%	0.54	MMZ1005Y601CTD25
1000	±25%	0.70	MMZ1005Y102CTD25
1500	±25%	1.00	MMZ1005Y152CTD25
1800	±25%	0.85	MMZ1005Y182CTD25
10	±5Ω	0.10	MMZ1005D100CTD25
22	±25%	0.17	MMZ1005D220CTD25
33	±25%	0.24	MMZ1005D330CTD25
68	±25%	0.38	MMZ1005D680CTD25
120	±25%	0.60	MMZ1005D121CTD25
240	±25%	0.90	MMZ1005D241CTD25
33	±25%	0.50	MMZ1005F330CTD25
47	±25%	0.60	MMZ1005F470CTD25
56	±25%	0.70	MMZ1005F560CTD25

○ Measurement equipment

Measurement item	Product No.	Manufacturer
Impedance	E4991A+16192A	Keysight Technologies
DC resistance	Type-7556	Yokogawa


* Equivalent measurement equipment may be used.

MMZ1005 type


■ ELECTRICAL CHARACTERISTICS

□ Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)


MMZ1005B series

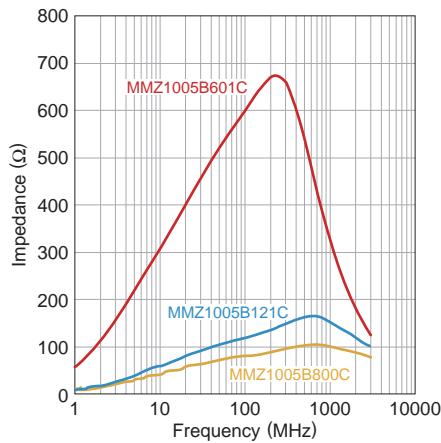


MMZ1005S series

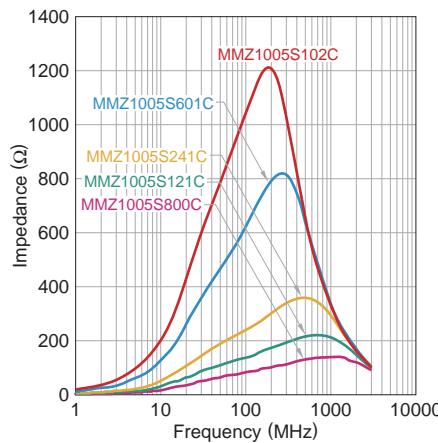


MMZ1005Y series

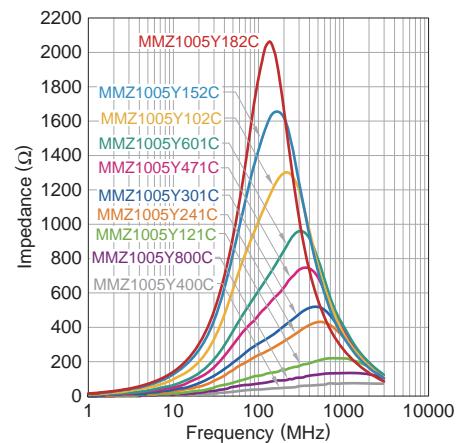

MMZ1005D series

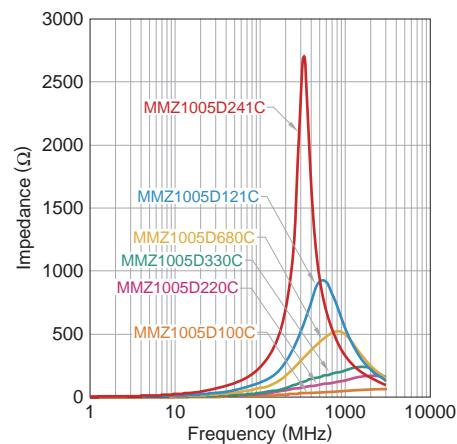

MMZ1005F series

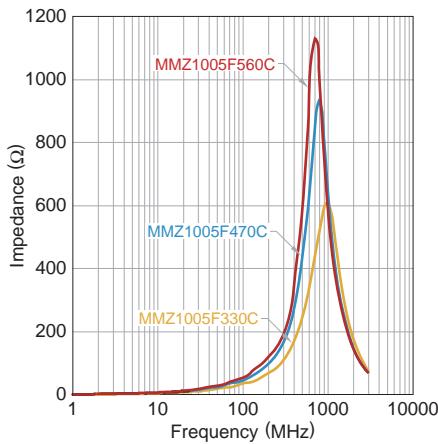


⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MMZ1005 type


■ ELECTRICAL CHARACTERISTICS

□ Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ1005B800CTD25

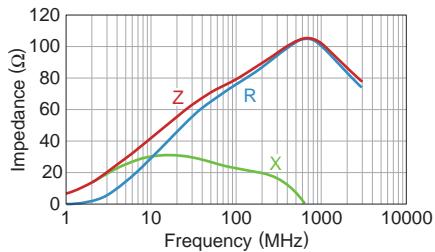


MMZ1005B121CTD25

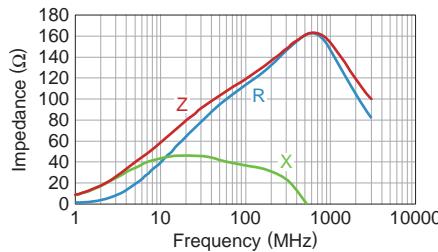


MMZ1005B601CTD25

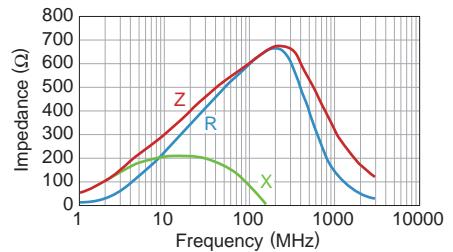


MMZ1005S800CTD25

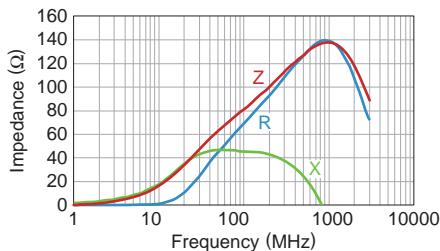


MMZ1005S121CTD25

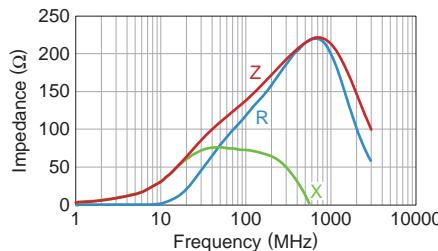


MMZ1005S241CTD25

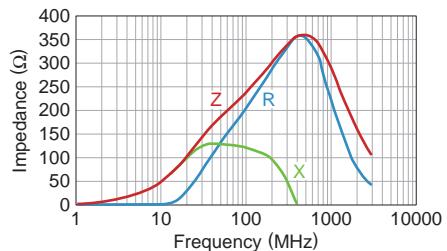


MMZ1005S601CTD25

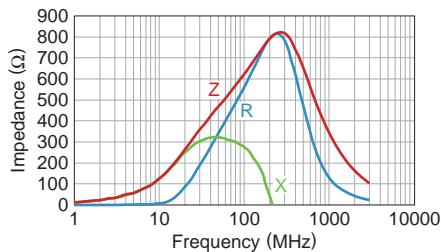


MMZ1005S102CTD25

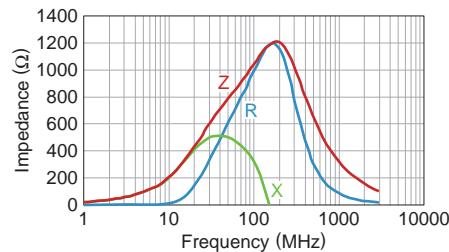


MMZ1005Y400CTD25

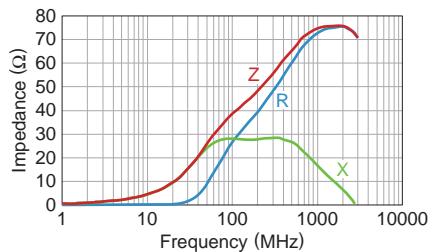


MMZ1005Y800CTD25

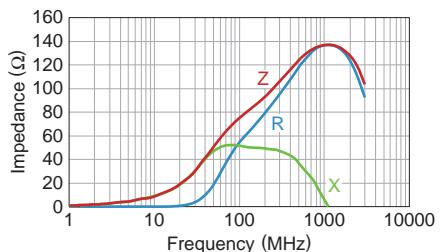


MMZ1005Y121CTD25

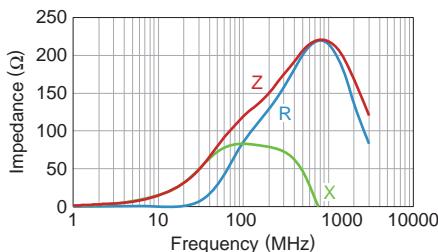


MMZ1005Y241CTD25

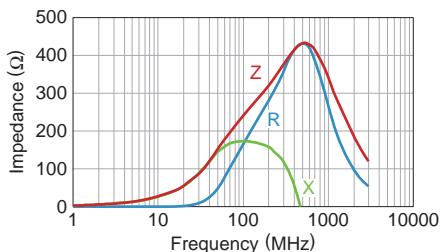


MMZ1005Y301CTD25

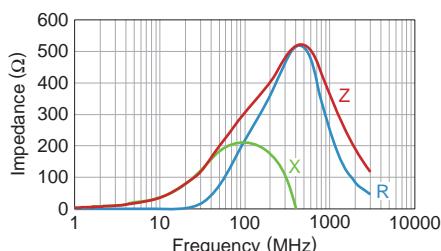

MMZ1005Y471CTD25

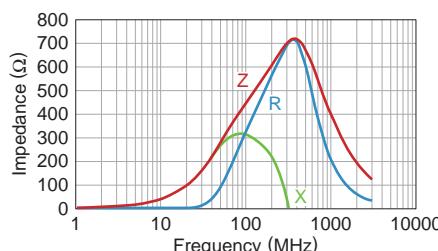

MMZ1005Y601CTD25

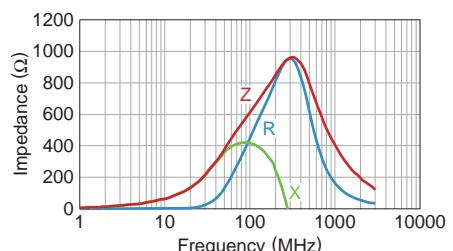


⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MMZ1005 type


■ ELECTRICAL CHARACTERISTICS

□ Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ1005Y102CTD25

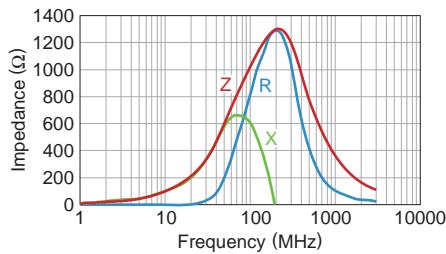


MMZ1005Y152CTD25

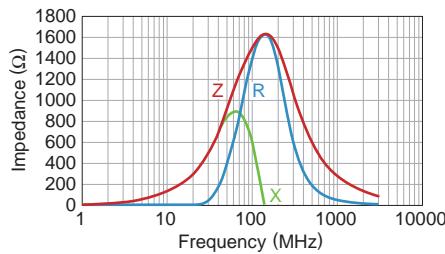


MMZ1005Y182CTD25

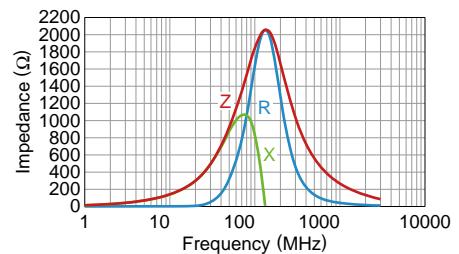


MMZ1005D100CTD25

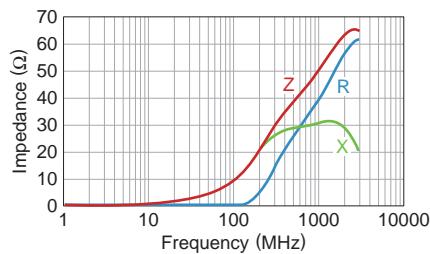


MMZ1005D220CTD25

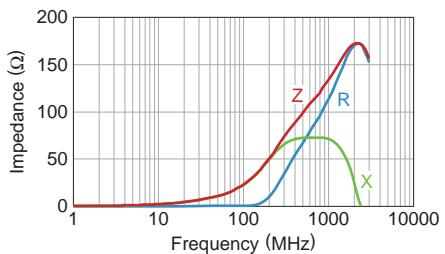


MMZ1005D330CTD25

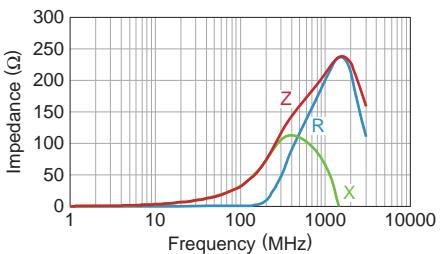


MMZ1005D680CTD25

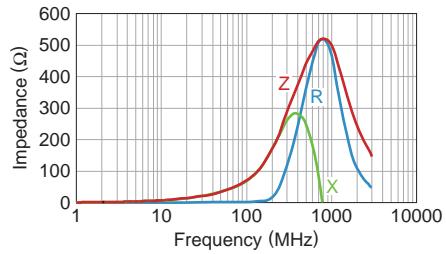


MMZ1005D121CTD25

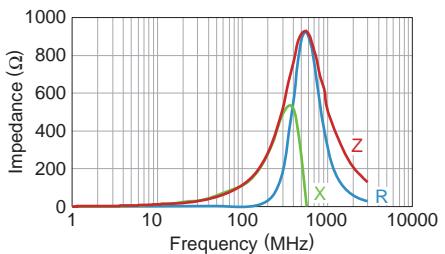


MMZ1005D241CTD25

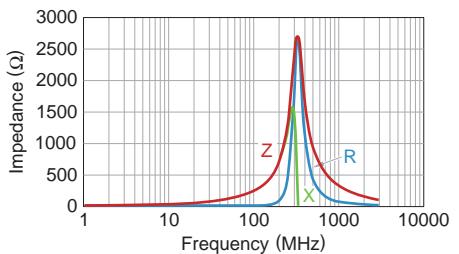


MMZ1005F330CTD25

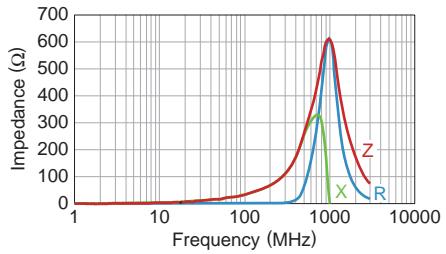

MMZ1005F470CTD25

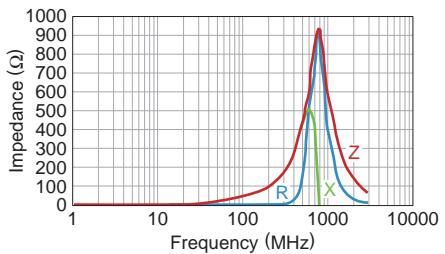

MMZ1005F560CTD25

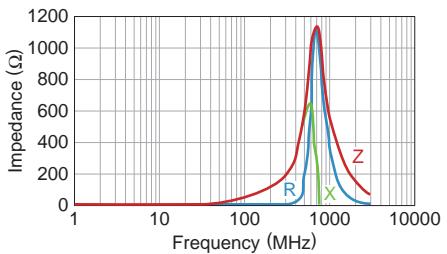


Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.



MMZ1005 type

■ PACKAGING STYLE

□ REEL DIMENSIONS

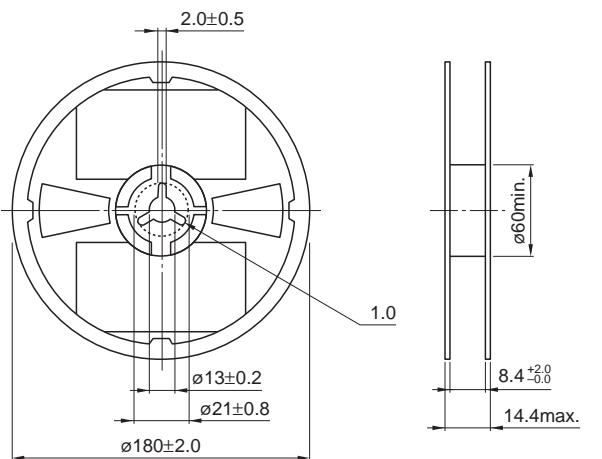

□ TAPE DIMENSIONS

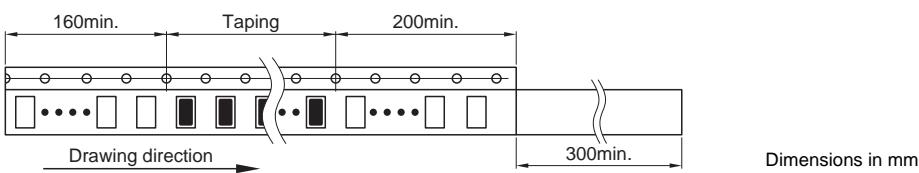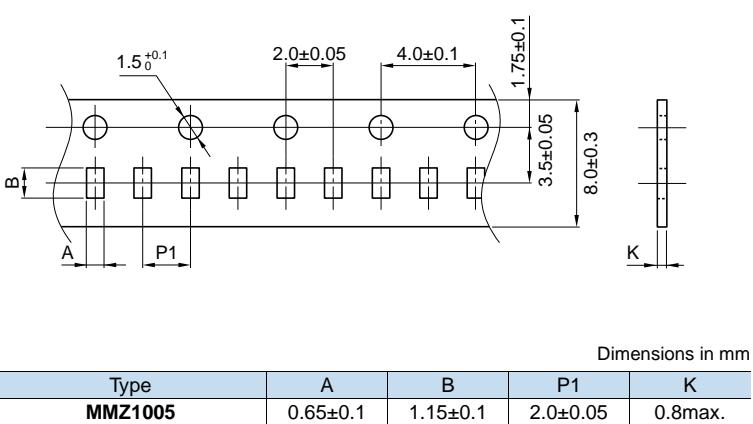

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.