
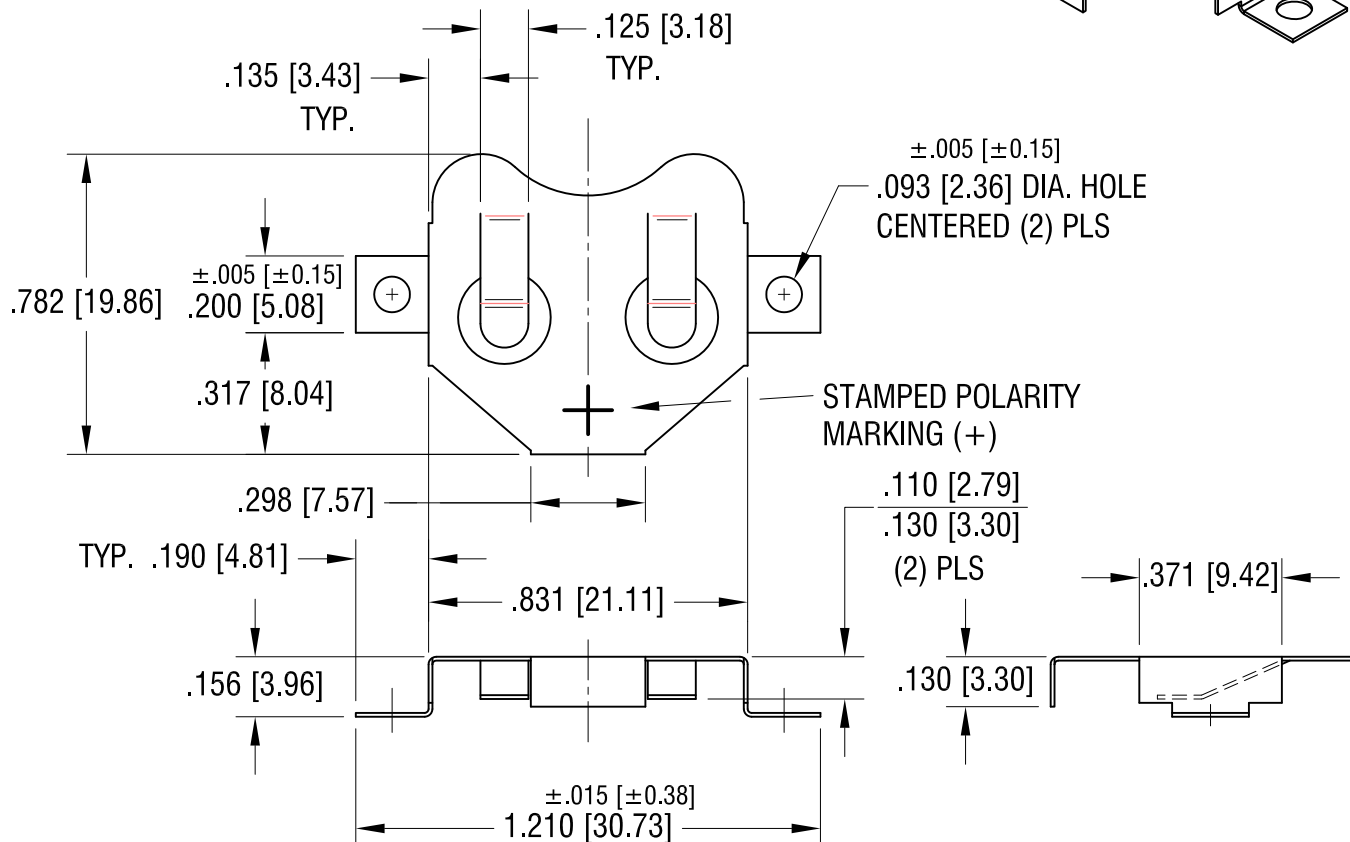


Diagram illustrating the MOUNTING PAD LAYOUT. The layout shows three square mounting pads arranged horizontally. The distance between the centers of the first and second pads is .200 [5.08] SQ. MIN. The distance between the centers of the second and third pads is .156 [3.96] SQ. MIN. The total distance between the left edge of the first pad and the right edge of the third pad is 1.210 [30.73] MIN. The pads are labeled NEG. CONTACT (PAD).

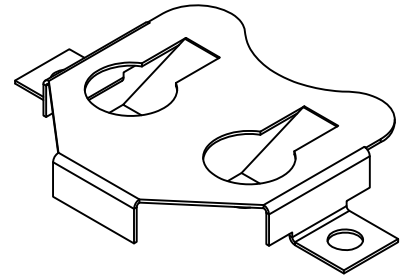

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

20mm SM COIN CELL CLIP

.010 [0.25] PHOSPHOR BRONZE

MATTE TIN PATE

4.07.09

2X

DWG NO.	
---------	--

C

UNLESS OTHERWISE SPECIFIED

3082

DESCRIPTION

REV.