

F



E

D




C

B

A

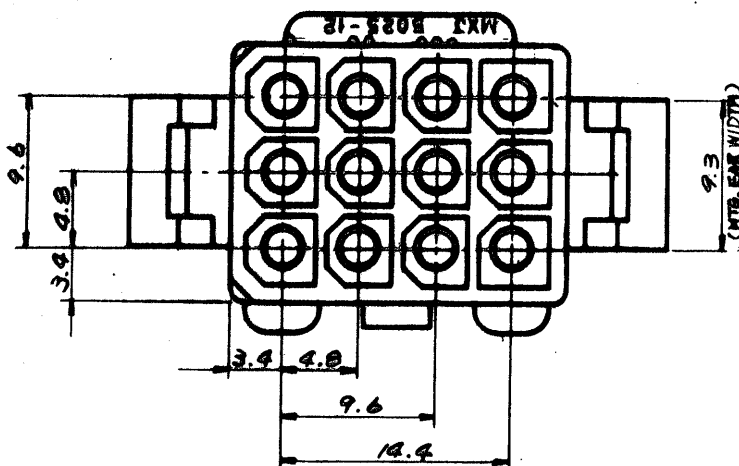

ROUTING HOLE DETAIL
(SCALE 1:1)

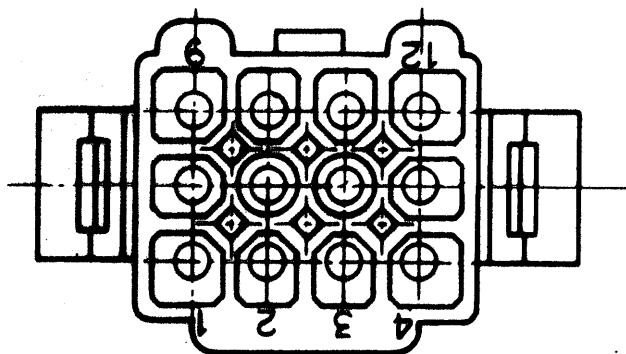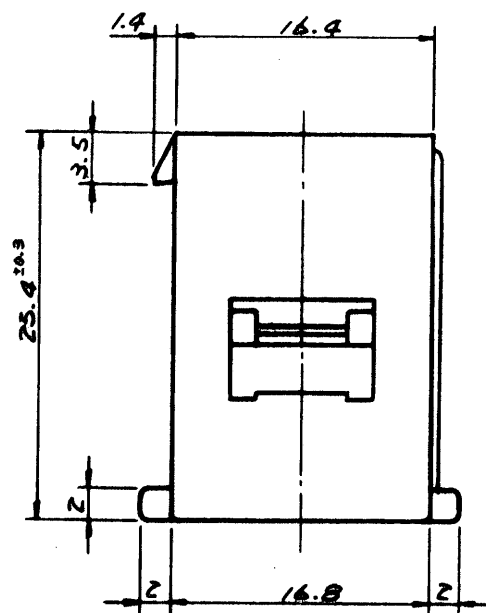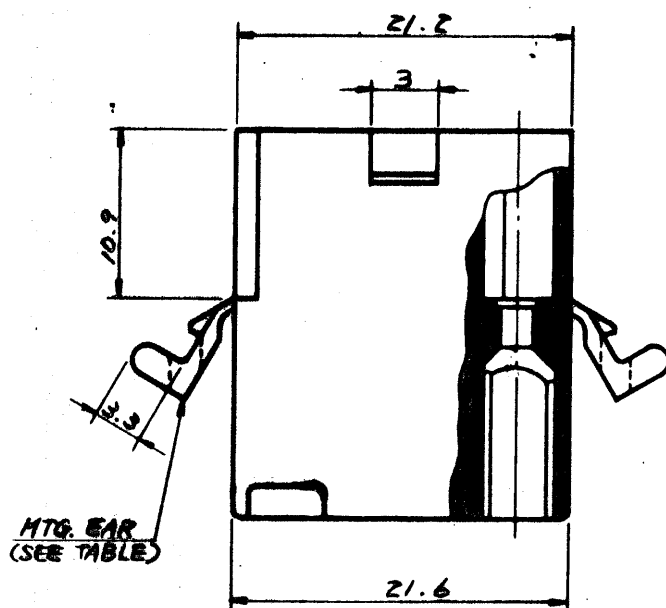

GENERAL TOLERANCES

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±3°

	5025-12P1	NO
	5025-12P	YES
EDP NO.	ENG. NO.	MTG. EAR

公差 (Tolerances)
 .000 → ±0.005 .00 → ±0.05
 .0 → ±0.1 . → ±0.3

材料 (MAT'L)
 NYLON66, 94V-2

熱処理 (H.T.)
 HRc —

仕上げ (Finish)
 —

Scale 2/1 名称 (Name)



所要数 (Req)
 DRWG. 4/Arano 9/9/77
 DSN'D H. Endo 10/9/77
 CHK'D K. Shino
 APP'D

MOLEX-JAPAN CO., LTD.
 日本モレックス株式会社

No. SD-5025-12P* REV. d




記号 (LTR)	変更内容 (Rev.)	Date	Name
D	ADDED -12P1 ECN NO. 917	9/5/77	4/Arano
C	REMOVED "X" ECN NO. 740	9/8/77	4/Arano
B	リット、パナソニック、サキト NO.	10/9/77	H. Endo
A	REVISED	10/9/77	H. Endo
O	PROPOSED	9/5/77	4/Arano

MINI. FIT CONN. 12 POS. PLUG HSG.

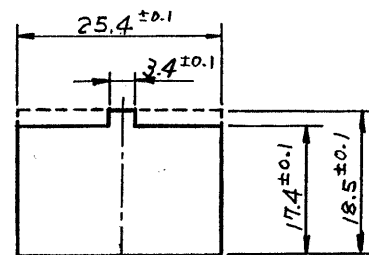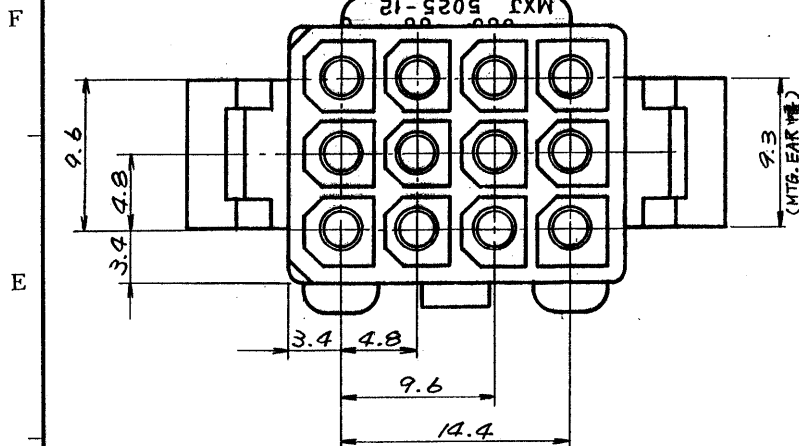

パネル板厚 2mm MAX

パネルスロット寸法
(SCALE 1:1)

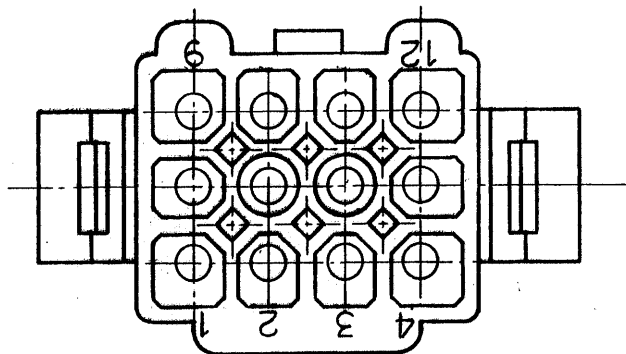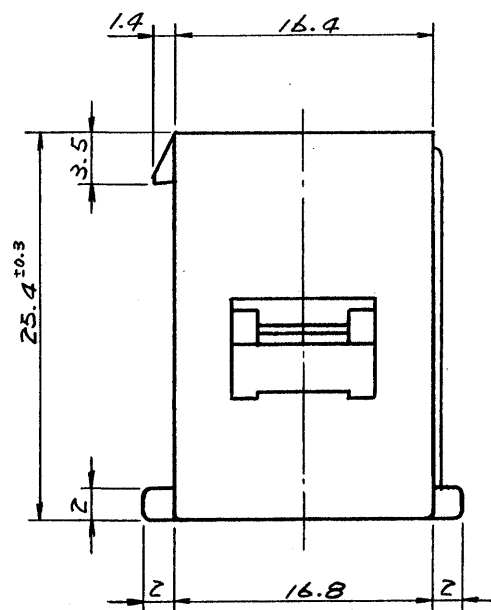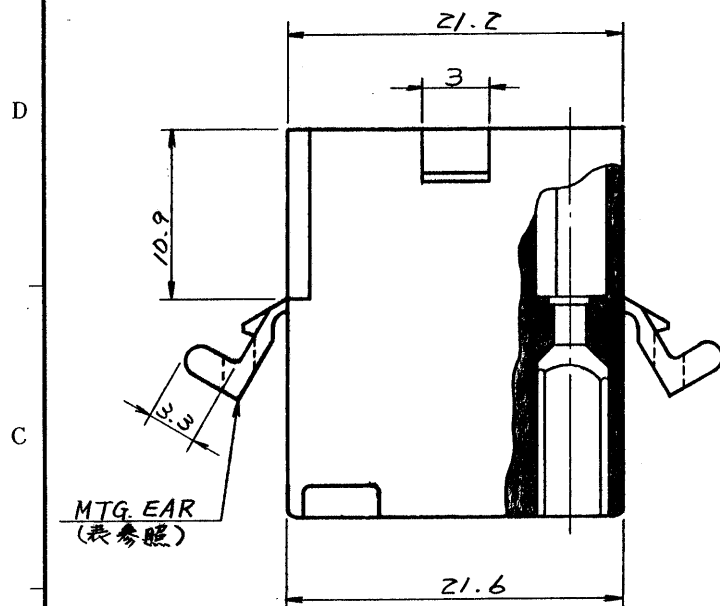

一般公差

10未満	±0.2
10以上30未満	±0.25
30以上	±0.3
角度	±3°

15-31-1123	5025-12P1	無
15-31-1121	5025-12P	有
EDP NO.	ENG. NO.	MTG. EAR

				公差 (Tolerances)	所要数 (Req)	DRWG. <i>Y. Awano 9/29/77</i>
				.000 → ±0.005 .00 → ±0.05		DSN'D <i>M. ENOMOTO 10/19/77</i>
				.0 → ±0.1 . → ±0.3		CHK'D <i>W. S. Kuo</i>
				材料 (MAT'L)	* MOLEX-JAPAN CO., LTD. 日本モレックス株式会社	APP'D <i>W. S. Kuo</i>
E	REVISED	ECN-NO. 1499	11/30/79 K.H.	NYLON 66, 94V-Z		
D	ADDED	12P1 ECN NO. 917	9/5/78 41	熱処理 (H.T.)	molex	
C	REMOVED "X"	ECN NO. 748	3/18/78 41	HRc — # —		
B	リ丁, パネルスロット, サキット NO.	13/9/77 11/10	11/10	仕上げ (Finish)	No.	REV.
A	REVISED	10/28/77 11/10	11/10	— # —	SD-5025-12P *	E
O	PROPOSED	9/29/77 11/10	11/10	Scale	名称 (Name)	
記号 (LTR)	変更内容 (Rev.)	Date	Name	2 / 1	MINI. FIT CONN. 12 POS. PLUG HSG.	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

15-31-1121