





DS1302

Trickle Charge Timekeeping Chip

FEATURES

- Real time clock counts seconds, minutes, hours, date of the month, month, day of the week, and year with leap year compensation
- 31 x 8 RAM for scratchpad data storage
- Serial I/O for minimum pin count
- 2.5-5.5 volt full operation
 - Optional 2.0-5.5 volt full operation also available
- Uses less than 300 nA at 2.5 volts
- Single-byte or multiple-byte (burst mode) data transfer for read or write of clock or RAM data
- 8-pin DIP or optional 8-pin SOIC's for surface mount
- Simple 3-wire interface
- TTL-compatible ($V_{CC} = 5V$)
- Optional industrial temperature range -40°C to +85°C
- DS1202 compatible
- Added features over DS1202
 - Optional trickle charge capability to V_{CC1}
 - Dual power supply pins for primary and backup power supplies
 - Backup power supply pin can be used for battery or super cap input
 - Additional scratchpad memory (7 bytes)

PIN ASSIGNMENT

DS1302
8-PIN DIP (300 MIL)DS1302S 8-PIN SOIC (200 MIL)
DS1302Z 8-PIN SOIC (150 MIL)

PIN DESCRIPTION

X1, X2	- 32.768 kHz Crystal Pins
GND	- Ground
RST	- Reset
I/O	- Data Input/Output
SCLK	- Serial Clock
V_{CC1}, V_{CC2}	- Power Supply Pins

ORDERING INFORMATION

PART #	DESCRIPTION
DS1302	Serial Timekeeping Chip; 8-pin DIP
DS1302S	Serial Timekeeping Chip; 8-pin SOIC (200 mil)
DS1302Z	Serial Timekeeping Chip; 8-pin SOIC (150 mil)

DESCRIPTION

The DS1302 Trickle Charge Timekeeping Chip contains a real time clock/calendar and 31 bytes of static RAM. It communicates with a microprocessor via a simple serial interface. The real time clock/calendar provides seconds, minutes, hours, day, date, month, and year information. The end of the month date is automatically adjusted for months with less than 31 days, including corrections for leap year. The clock operates in either the 24-hour or 12-hour format with an AM/PM indicator.


Interfacing the DS1302 with a microprocessor is simplified by using synchronous serial communication. Only three wires are required to communicate with the clock/RAM: (1) RST (Reset), (2) I/O (Data line), and (3) SCLK (Serial clock). Data can be transferred to and from the clock/RAM one byte at a time or in a burst of up to 31 bytes. The DS1302 is designed to operate on very low power and retain data and clock information on less than 1 microwatt.

The DS1302 is the successor to the DS1202. In addition to the basic timekeeping functions of the DS1202, the DS1302 has the additional features of dual power pins for primary and backup power supplies, programmable trickle charger for V_{CC1} , and seven additional bytes of scratchpad memory.


OPERATION

The main elements of the Serial Timekeeper are shown in Figure 1: shift register, control logic, oscillator, real time clock, and RAM. To initiate any transfer of data, \overline{RST} is taken high and eight bits are loaded into the shift register providing both address and command information. Data is serially input on the rising edge of the $SCLK$. The first eight bits specify which of 40 bytes will be accessed, whether a read or write cycle will take place, and whether a byte or burst mode transfer is to occur.

DS1302 BLOCK DIAGRAM Figure 1

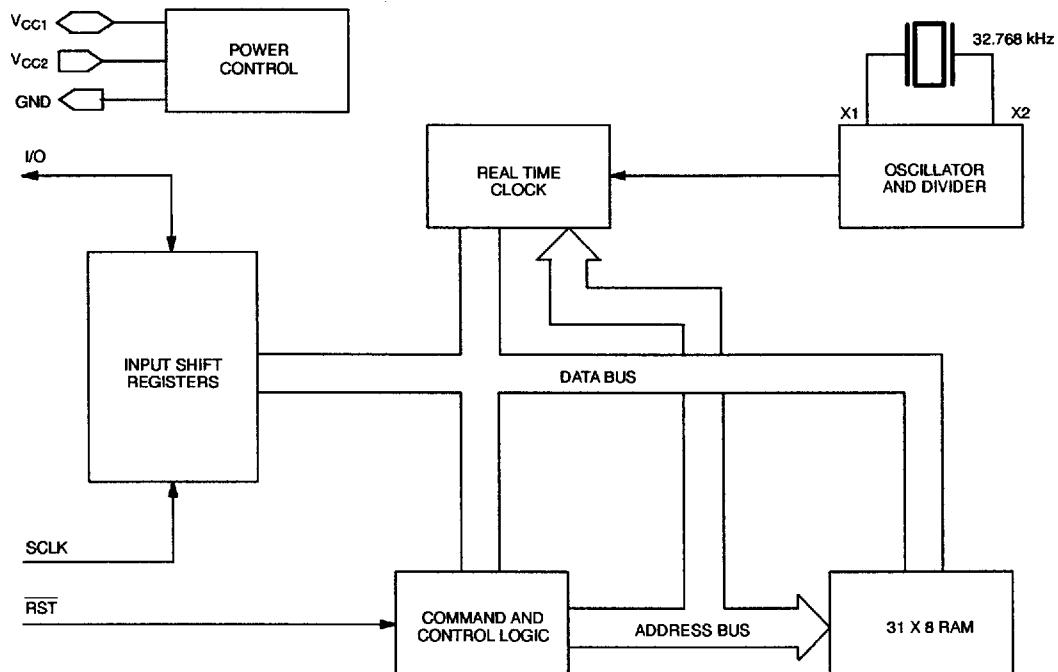

ADDRESS/COMMAND BYTE Figure 2



RESET AND CLOCK CONTROL

All data transfers are initiated by driving the \overline{RST} input high. The \overline{RST} input serves two functions. First, \overline{RST} turns on the control logic which allows access to the shift register for the address/command sequence. Second, the \overline{RST} signal provides a method of terminating either single byte or multiple byte data transfer.

A clock cycle is a sequence of a falling edge followed by a rising edge. For data inputs, data must be valid during the rising edge of the clock and data bits are output on the falling edge of clock. If the \overline{RST} input is low all data transfer terminates and the I/O pin goes to a high impedance state. Data transfer is illustrated in Figure 3. At power-up, \overline{RST} must be a logic 0 until $V_{CC} \geq 2.5$ volts. Also SCLK must be at a logic 0 when \overline{RST} is driven to a logic 1 state.

DATA INPUT

Following the eight SCLK cycles that input a write command byte, a data byte is input on the rising edge of the next eight SCLK cycles. Additional SCLK cycles are ignored should they inadvertently occur. Data is input starting with bit 0.

DATA OUTPUT

Following the eight SCLK cycles that input a read command byte, a data byte is output on the falling edge of the next eight SCLK cycles. Note that the first data bit to be transmitted occurs on the first falling edge after the last bit of the command byte is written. Additional SCLK cycles retransmit the data bytes should they inadvertently occur so long as \overline{RST} remains high. This operation permits continuous burst mode read capability. Also, the I/O pin is tri-stated upon each rising edge of SCLK. Data is output starting with bit 0.

BURST MODE

Burst mode may be specified for either the clock/calendar or the RAM registers by addressing location 31 decimal (address/command bits one through five = logical one). As before, bit six specifies clock or RAM and bit 0 specifies read or write. There is no data storage capacity at locations 9 through 31 in the Clock/Calendar Registers or location 31 in the RAM registers. Reads or writes in burst mode start with bit 0 of address 0.

As in the case with the DS1202, when writing to the clock registers in the burst mode, the first eight registers must be written in order for the data to be transferred.

However, when writing to RAM in burst mode it is not necessary to write all 31 bytes for the data to transfer. Each byte that is written to will be transferred to RAM regardless of whether all 31 bytes are written or not.

CLOCK/CALENDAR

The clock/calendar is contained in seven write/read registers as shown in Figure 4. Data contained in the clock/calendar registers is in binary coded decimal format (BCD).

CLOCK HALT FLAG

Bit 7 of the seconds register is defined as the clock halt flag. When this bit is set to logic 1, the clock oscillator is stopped and the DS1302 is placed into a low-power standby mode with a current drain of less than 100 nanoamps. When this bit is written to logic 0, the clock will start.

AM-PM/12-24 MODE

Bit 7 of the hours register is defined as the 12- or 24-hour mode select bit. When high, the 12-hour mode is selected. In the 12-hour mode, bit 5 is the AM/PM bit with logic high being PM. In the 24-hour mode, bit 5 is the second 10 hour bit (20-23 hours).

WRITE PROTECT REGISTER

Bit 7 of write protect register is the write protect bit. The first seven bits (bits 0-6) are forced to zero and will always read a zero when read. Before any write operation to the clock or RAM, bit 7 must be zero. When high, the write protect bit prevents a write operation to any other register.

TRICKLE CHARGE REGISTER

This register controls the trickle charge characteristics of the DS1302. The simplified schematic of Figure 5 shows the basic components of the trickle charger. The trickle charge select (TCS) bits (bits 4-7) control the selection of the trickle charger. In order to prevent accidental enabling, only a pattern of 1010 will enable the trickle charger. All other patterns will disable the trickle charger. The DS1302 powers up with the trickle charger disabled. The diode select (DS) bits (bits 2 - 3) select whether one diode or two diodes are connected between V_{CC2} and V_{CC1} . If DS is 01, one diode is selected or if DS is 10, two diodes are selected. If DS is 00 or 11, the trickle charger is disabled independent of

TCS. The RS bits (bits 0-1) select the resistor that is connected between V_{CC2} and V_{CC1} . The resistor selected by the resistor select (RS) bits is as follows:

RS Bits	Resistor	Typical Value
00	None	None
01	R1	2K Ω
10	R2	4K Ω
11	R3	8K Ω

If RS is 00, the trickle charger is disabled independent of TCS.

Diode and resistor selection is determined by the user according to the maximum current desired for battery or super cap charging. The maximum charging current can be calculated as illustrated in the following example. Assume that a system power supply of 5V is applied to V_{CC2} and a super cap is connected to V_{CC1} . Also assume that the trickle charger has been enabled with 1 diode and resistor R1 between V_{CC2} and V_{CC1} . The maximum current I_{max} would therefore be calculated as follows:

$$\begin{aligned} I_{max} &= (5.0V - \text{diode drop}) / R1 \\ &\sim (5.0V - 0.7V) / 2K\Omega \\ &\sim 2.2 \text{ mA} \end{aligned}$$

Obviously, as the super cap charges, the voltage drop between V_{CC2} and V_{CC1} will decrease and therefore the charge current will decrease.

CLOCK/CALENDAR BURST MODE

The clock/calendar command byte specifies burst mode operation. In this mode the first eight clock/calendar registers can be consecutively read or written (see Figure 4) starting with bit 0 of address 0.

If the write protect bit is set high when a write clock/calendar burst mode is specified, no data transfer will occur

to any of the eight clock/calendar registers (this includes the control register). The trickle charger is not accessible in burst mode.

RAM

The static RAM is 31 x 8 bytes addressed consecutively in the RAM address space.

RAM BURST MODE

The RAM command byte specifies burst mode operation. In this mode, the 31 RAM registers can be consecutively read or written (see Figure 4) starting with bit 0 of address 0.

REGISTER SUMMARY

A register data format summary is shown in Figure 4.

CRYSTAL SELECTION



A 32.768 kHz crystal, Daiwa Part No. DT26S, Seiko Part No. DS-VT-200 or equivalent, can be directly connected to the DS1302 via pins 2 and 3 (X1, X2). The crystal selected for use should have a specified load capacitance (CL) of 6 pF.

POWER CONTROL

V_{CC1} provides low power operation in single supply and battery operated systems as well as low power battery backup.

V_{CC2} provides the primary power in dual supply systems where V_{CC1} is connected to a backup source to maintain the time and data in the absence of primary power.

The DS1302 will operate from the larger of V_{CC1} or V_{CC2} . When V_{CC2} is greater than $V_{CC1} + 0.2V$, V_{CC2} will power the DS1302. When V_{CC2} is less than V_{CC1} , V_{CC1} will power the DS1302.

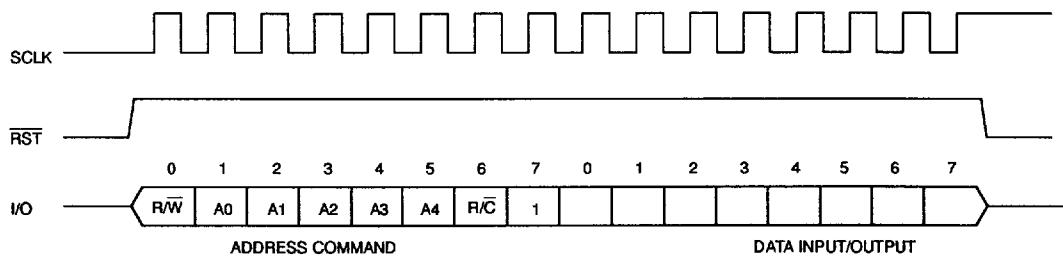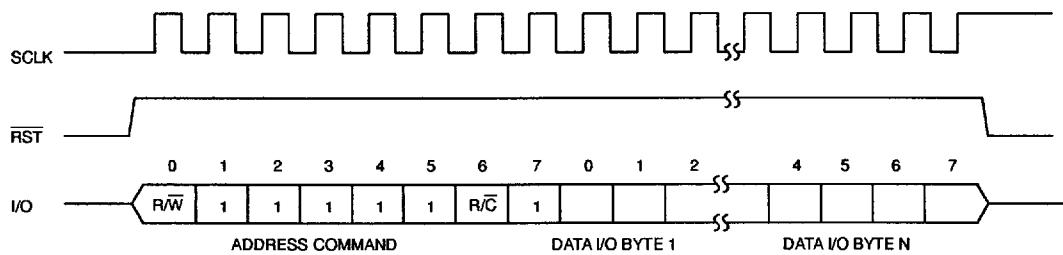DATA TRANSFER SUMMARY Figure 3**SINGLE BYTE TRANSFER****BURST MODE TRANSFER**

FUNCTION	BYTE N	SCLK n
CLOCK	8	72
RAM	31	256

REGISTER ADDRESS/DEFINITION Figure 4

REGISTER ADDRESS

A. CLOCK

	7	6	5	4	3	2	1	0	
SEC	1	0	0	0	0	0	0	RD W	
MIN	1	0	0	0	0	0	1	RD W	
HR	1	0	0	0	0	1	0	RD W	
DATE	1	0	0	0	0	1	1	RD W	
MONTH	1	0	0	0	1	0	0	RD W	
DAY	1	0	0	0	1	0	1	RD W	
YEAR	1	0	0	0	1	1	0	RD W	
CONTROL	1	0	0	0	1	1	1	RD W	
TRICKLE CHARGER	1	0	0	1	0	0	0	RD W	
CLOCK BURST	1	0	1	1	1	1	1	RD W	

REGISTER DEFINITION


00-59	CH	10 SEC	SEC						
00-59	0	10 MIN	MIN						
01-12 00-23	12/ 24	0	10 A/P	HR	HR				
01-28/29 01-30 01-31	0	0	10 DATE	DATE					
01-12	0	0	10 M	MONTH					
01-07	0	0	0	0	DAY				
0-99	10 YEAR		YEAR						
WP	0	0	0	0	0	0	0	0	0
TCS	TCS	TCS	TCS	DS	DS	RS	RS		

B. RAM

RAM 0	1	1	0	0	0	0	0	RD W	
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
RAM 30	1	1	1	1	1	1	1	0	RD W
RAM BURST	1	1	1	1	1	1	1	1	RD W

RAM DATA 0									
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
RAM DATA 30									

DS1302 PROGRAMMABLE TRICKLE CHARGER Figure 5

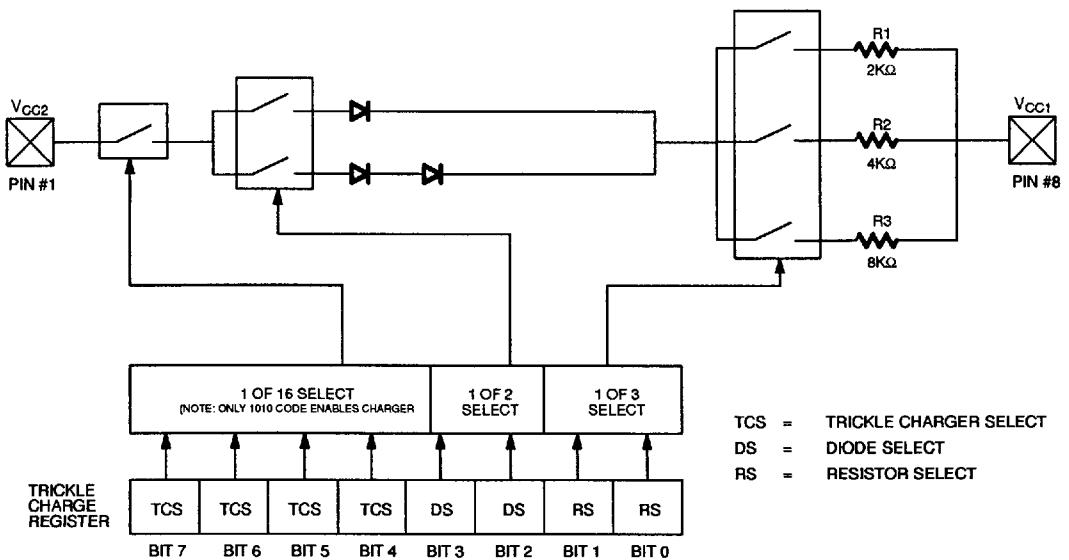

ABSOLUTE MAXIMUM RATINGS*

Voltage on Any Pin Relative to Ground	-0.5V to +7.0V
Operating Temperature	0°C to 70°C
Storage Temperature	-55°C to +125°C
Soldering Temperature	260°C for 10 seconds

* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

The Dallas Semiconductor DS1302 is built to the highest quality standards and manufactured for long term reliability. All Dallas Semiconductor devices are made using the same quality materials and manufacturing methods. However, standard versions of the DS1302 are not exposed to environmental stresses, such as burn-in, that some industrial applications require. Products which have successfully passed through this series of environmental stresses are marked IND or N, denoting their extended operating temperature and reliability rating. For specific reliability information on this product, please contact the factory in Dallas at (214) 450-0448.

RECOMMENDED DC OPERATING CONDITIONS

(0°C to 70°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Supply Voltage V_{CC1}, V_{CC2}	V_{CC1}, V_{CC2}	2.5		5.5	V	1, 11
Logic 1 Input	V_{IH}	2.0		$V_{CC}+0.3$	V	1
Logic 0 Input	V_{IL}	$V_{CC}=2.5V$	-0.3	+0.3	V	1
		$V_{CC}=5V$	-0.3	+0.8		

DC ELECTRICAL CHARACTERISTICS(0°C to 70°C; $V_{CC} = 2.5$ to 5.5V*)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Input Leakage	I_{LI}			+500	μA	6
I/O Leakage	I_{LO}			+500	μA	6
Logic 1 Output	V_{OH}	$V_{CC}=2.5V$	1.6		V	2
		$V_{CC}=5V$	2.4			
Logic 0 Output	V_{OL}	$V_{CC}=2.5V$		0.4	V	3
		$V_{CC}=5V$		0.4		
Active Supply Current	I_{CC1A}	$V_{CC1}=2.5V$		0.4	mA	5, 12
		$V_{CC1}=5V$		1.2		
Timekeeping Current	I_{CC1T}	$V_{CC1}=2.5V$		0.3	μA	4, 12
		$V_{CC1}=5V$		1		
Standby Current	I_{CC1S}	$V_{CC1}=2.5V$	100		nA	10, 12, 14
		$V_{CC1}=5V$	100			
Active Supply Current	I_{CC2A}	$V_{CC2}=2.5V$		0.425	mA	5, 13
		$V_{CC2}=5V$		1.28		

*Unless otherwise noted.

DC ELECTRICAL CHARACTERISTICS (cont'd) (0°C to 70°C; V_{CC} = 2.5 to 5.5V*)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Timekeeping Current	I _{CC2T}	V _{CC2} =2.5V		25.3	µA	4, 13
		V _{CC2} =5V		81		
Standby Current	I _{CC2S}	V _{CC2} =2.5V		25	µA	10, 13
		V _{CC2} =5V		80		
Trickle Charge Resistors	R ₁ R ₂ R ₃		2 4 8		KΩ KΩ KΩ	
Trickle Charger Diode Voltage Drop	V _{TD}		0.7		V	

*Unless otherwise noted.

CAPACITANCE (t_A = 25°C)

PARAMETER	SYMBOL	CONDITION	TYP	MAX	UNITS	NOTES
Input Capacitance	C _I		10		pF	
I/O Capacitance	C _{I/O}		15		pF	
Crystal Capacitance	C _x		6		pF	

AC ELECTRICAL CHARACTERISTICS (0°C to 70°C; V_{CC} = +5V ± 10%*)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Data to CLK Setup	t _{DC}	V _{CC} =2.5V	200		ns	7
		V _{CC} =5V	50			
CLK to Data Hold	t _{CDH}	V _{CC} =2.5V	280		ns	7
		V _{CC} =5V	70			
CLK to Data Delay	t _{CDD}	V _{CC} =2.5V		800	ns	7, 8, 9
		V _{CC} =5V		200		
CLK Low Time	t _{CL}	V _{CC} =2.5V	1000		ns	7
		V _{CC} =5V	250			
CLK High Time	t _{CH}	V _{CC} =2.5V	1000		ns	7
		V _{CC} =5V	250			
CLK Frequency	t _{CLK}	V _{CC} =2.5V		0.5	MHz	7
		V _{CC} =5V	DC	2.0		
CLK Rise and Fall	t _R , t _F	V _{CC} =2.5V		2000	ns	
		V _{CC} =5V		500		
RST to CLK Setup	t _{CC}	V _{CC} =2.5V	4		µs	7
		V _{CC} =5V	1			

*Unless otherwise noted.


AC ELECTRICAL CHARACTERISTICS (cont'd)

(0°C to 70°C; $V_{CC} = +5V \pm 10\%$ *)


PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
CLK to RST Hold	t_{CCH}	$V_{CC}=2.5V$	240			7
		$V_{CC}=5V$	60			
RST Inactive Time	t_{CWH}	$V_{CC}=2.5V$	4			7
		$V_{CC}=5V$	1			
RST to I/O High Z	t_{CDZ}	$V_{CC}=2.5V$		280		7
		$V_{CC}=5V$		70		
SCLK to I/O High Z	t_{CCZ}	$V_{CC}=2.5V$		280		7
		$V_{CC}=5V$		70		

*Unless otherwise noted.

TIMING DIAGRAM: READ DATA TRANSFER Figure 5

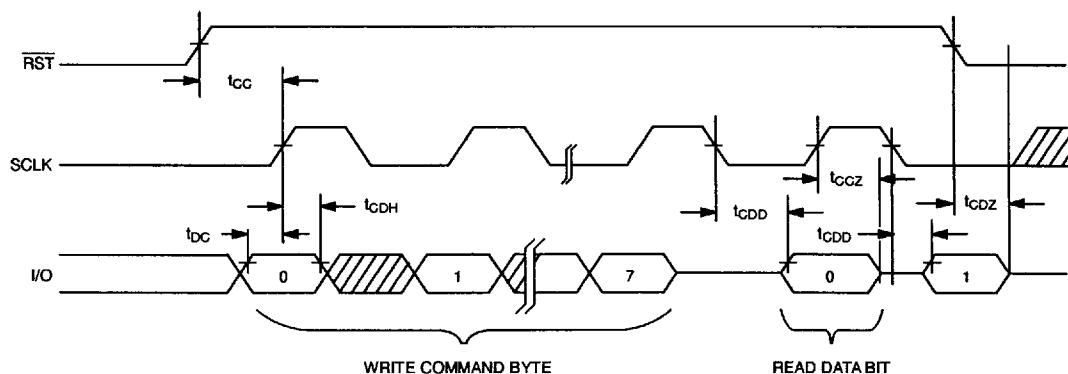


TIMING DIAGRAM: WRITE DATA TRANSFER Figure 6

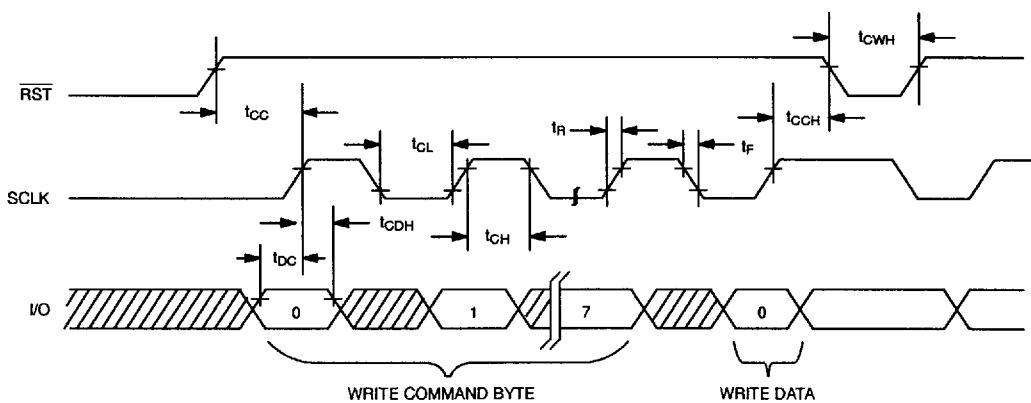


NOTES:

1. All voltages are referenced to ground.
2. Logic one voltages are specified at a source current of 1 mA at $V_{CC}=5V$ and .4 mA at $V_{CC}=2.5V$, $V_{OH}=V_{CC}$ for capacitive loads.
3. Logic zero voltages are specified at a sink current of 4 mA at $V_{CC}=5V$ and 1.5 mA at $V_{CC}=2.5V$, $V_{OL}=GND$ for capacitive loads.
4. I_{CC1T} and I_{CC2T} are specified with I/O open, \overline{RST} set to a logic 0, and clock halt flag=0 (oscillator enabled).
5. I_{CC1A} and I_{CC2A} are specified with the I/O pin open, \overline{RST} high, $SCLK=2$ MHz at $V_{CC}=5V$; $SCLK=500$ kHz, $V_{CC}=2.5V$ and clock halt flag=0 (oscillator enabled).
6. \overline{RST} , $SCLK$, and I/O all have 40K Ω pulldown resistors to ground.
7. Measured at $V_{IH}=2.0V$ or $V_{IL}=0.8V$ and 10 ms maximum rise and fall time.
8. Measured at $V_{OH}=2.4V$ or $V_{OL}=0.4V$.
9. Load capacitance = 50 pF.
10. I_{CC1S} and I_{CC2S} are specified with \overline{RST} , I/O, and $SCLK$ open. The clock halt flag must be set to logic one (oscillator disabled).
11. $V_{CC}=V_{CC2}$, when $V_{CC2}>V_{CC1}+0.2V$; $V_{CC}=V_{CC1}$, when $V_{CC1}>V_{CC2}$.
12. $V_{CC2}=0$ volts.
13. $V_{CC1}=0$ volts.
14. Typical values are at 25°C.

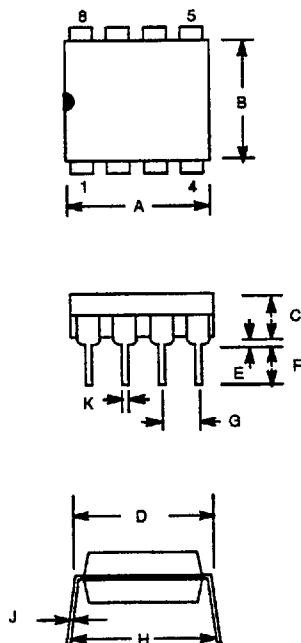DS1302 SERIAL TIMEKEEPER 8-PIN DIP

PKG	8-PIN		
	DIM	MIN	MAX
A IN. MM	0.360 9.14	0.400 10.18	
B IN. MM	0.240 6.10	0.260 6.60	
C IN. MM	0.120 3.05	0.140 3.56	
D IN. MM	0.300 7.62	0.325 8.26	
E IN. MM	0.015 0.38	0.040 1.02	
F IN. MM	0.120 3.04	0.140 3.56	
G IN. MM	0.090 2.29	0.110 2.79	
H IN. MM	0.320 8.13	0.370 9.40	
J IN. MM	0.008 0.20	0.012 0.30	
K IN. MM	0.015 0.38	0.021 0.53	

DS1302S SERIAL TIMEKEEPER 8-PIN SOIC (150 MIL AND 200 MIL)

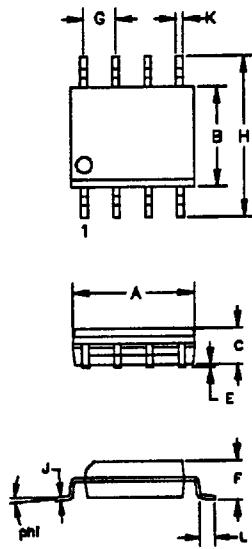

PKG	8-PIN (150 MIL)		8-PIN (200 MIL)		
	DIM	MIN	MAX	MIN	MAX
A IN. MM	0.188 4.78	0.196 4.98	0.203 5.16	0.213 5.41	
B IN. MM	0.150 3.81	0.158 4.01	0.203 5.16	0.213 5.41	
C IN. MM	0.048 1.22	0.062 1.57	0.070 1.78	0.074 1.88	
E IN. MM	0.004 0.10	0.010 0.25	0.004 0.10	0.010 0.25	
F IN. MM	0.053 1.35	0.069 1.75	0.074 1.88	0.084 2.13	
G IN. MM	0.050 BSC 1.27 BSC				
H IN. MM	0.230 5.84	0.244 6.20	0.302 7.67	0.318 8.08	
J IN. MM	0.007 0.18	0.011 0.28	0.006 0.15	0.010 0.25	
K IN. MM	0.012 0.30	0.020 0.51	0.013 0.33	0.020 0.51	
L IN. MM	0.016 0.41	0.050 1.27	0.019 0.48	0.030 0.76	
phi		0°	8°	0°	8°

56-G2008-001
56-G4010-001