


TGC4407-SM

Ka-Band Up-Converter



Applications

- VSAT
- Point-to-Point Radio
- Test Equipments & Sensors

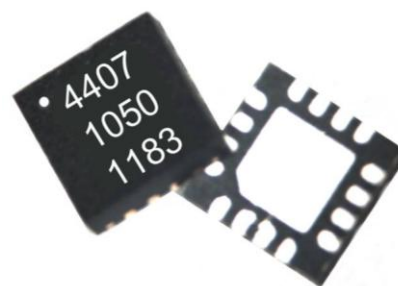


QFN 3x3mm 16L

Product Features

- RF Frequency Range: 21.5 – 32.5 GHz
- Wideband IF Frequency: DC – 7.0 GHz
- Sub-Harmonic Pumped LO Frequency: 11 – 16 GHz
- Integrated LO Amplifier: 0 to 7.5 dBm Input
- Conversion Gain: -9 dB
- Bias: $V_d = 5\text{ V}$, $I_d = 65\text{ mA}$, Typical
- Package Dimensions: 3.0 x 3.0 x 0.85 mm

Functional Block Diagram

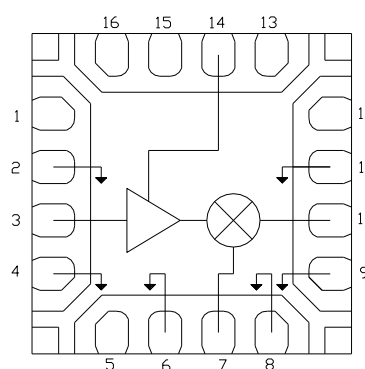

General Description

The TriQuint TGC4407-SM is a Ka-Band sub-harmonic Up-Converter with integrated LO buffer amplifier. The TGC4407-SM operates from 21.5 to 32.5 GHz and is designed using TriQuint's pHEMT production process.

The TGC4407-SM typically provides 13 dBm of Input TOI at -10dBm input power per tone and a conversion gain of -9 dB.

The TGC4407-SM is available in a low-cost, surface mount 16 lead 3x3 QFN package and is ideally suited for Point-to-Point Radio, and Ka-Band VSAT Ground Terminal.

Lead-free and RoHS compliant.

Evaluation Boards are available upon request.

Pin Configuration

Pin #	Symbol
1, 5, 12, 13, 15, 16	N/C
2, 4, 6, 8, 9, 11	GND
3	LO IN
7	IF IN
10	RF OUT
14	Vd

Ordering Information

Part No.	ECCN	Description
TGC4407-SM	EAR99	Ku-band Up-Converter

Standard T/R size = 500 pieces on a 7" reel.

Specifications

Absolute Maximum Ratings

Parameter	Rating
Drain Voltage, Vd	+7 V
Drain Current, Id	0.175 A
Power Dissipation, Pdiss	1.2 W
RF Input Power, CW, 50Ω, T = 25°C	+10 dBm
Channel Temperature, Tch	200 °C
Mounting Temperature (30 Seconds)	260 °C
Storage Temperature	-40 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Min	Typical	Max	Units
Vd	4	5	6	V
Id		0.065		A
Id_drive (Under RF Drive)		0.076		A
Temperature	-40	25	85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Test conditions unless otherwise noted: 25°C, Vd = 5 V, Id = 0.065 A Typical.


For: IF = 500 MHz, LSB = 2 x LO – IF (19.5 – 31.5 GHz) and USB = 2 x LO + IF (20.5 – 32.5 GHz).

Parameter	IF = 500 MHz, LO = 0 dBm, Vd = 5 V, Id = 0.065 A.			Units
	Min	Typical	Max.	
RF Frequency Range	21.5		32.5	GHz
LO Frequency Range	11		16	GHz
IF Frequency Range	DC		7	GHz
Conversion Gain		-9		dB
Noise Figure		9		dB
2LO-to-RF Isolation		35		dB
Input IP3		13		dBm
Input 1dB Compression		4		dBm
Supply Current		65		mA







Specifications (cont.)

Thermal and Reliability Information







Parameter	Condition	Rating
Thermal Resistance, θ_{JC} , measured to back of package	Tbase = 85 °C	$\theta_{JC} = 47$ °C/W
Channel Temperature (Tch), and Median Lifetime (Tm)	Tbase = 85 °C, Vd = 5 V, Id = 65 mA, Pdis = 0.325 W	Tch = 100 °C Tm = 2.9 E+11 Hours
Channel Temperature (Tch), and Median Lifetime (Tm) Under RF Drive	Tbase = 85 °C, Vd = 5 V, Id = 76 mA, Pin = 7 dBm, Pdis = 0.38 W	Tch = 103 °C Tm = 2.2 E+11 Hours

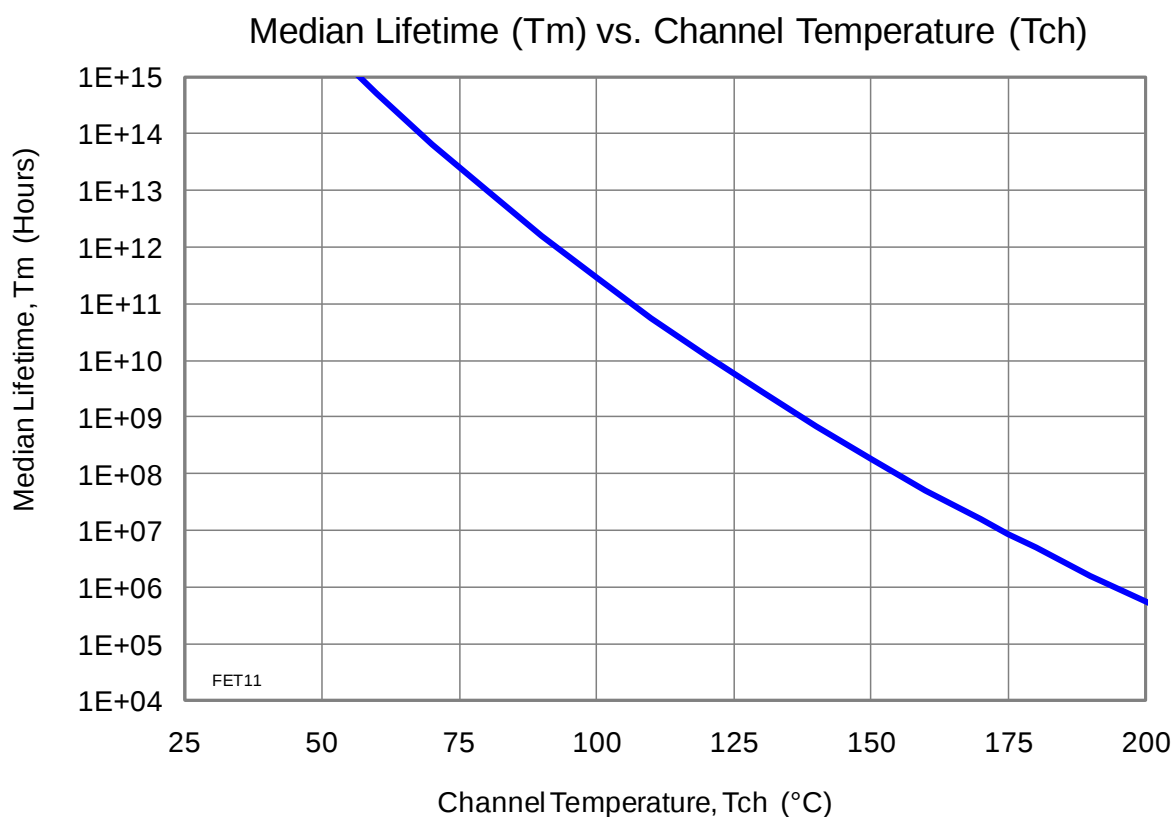







Typical Performance

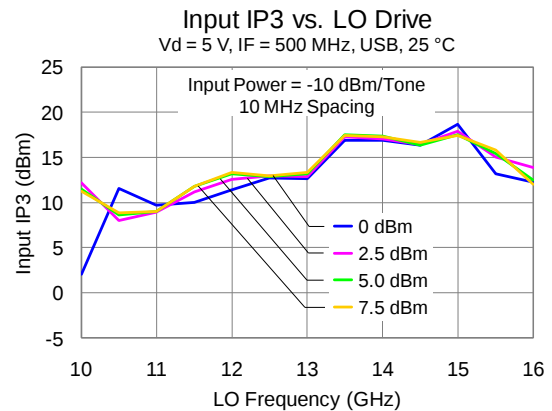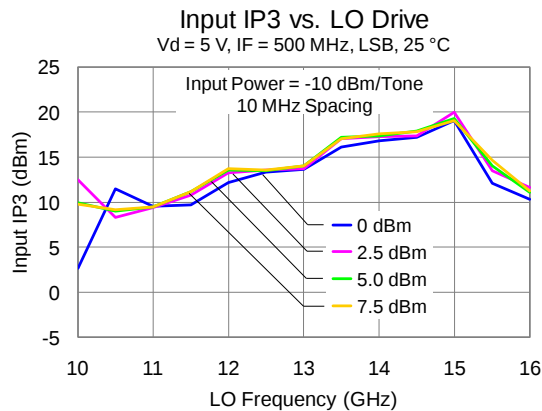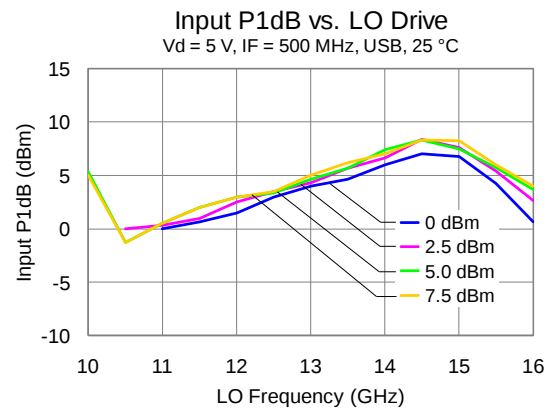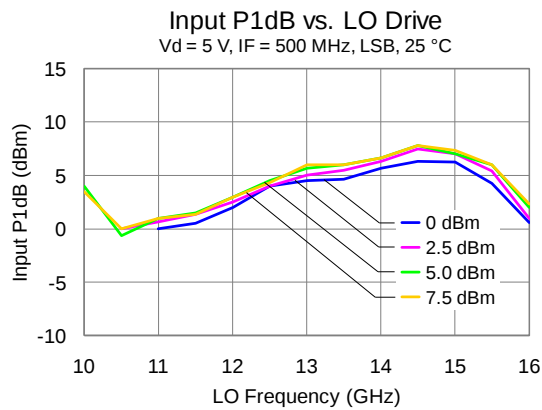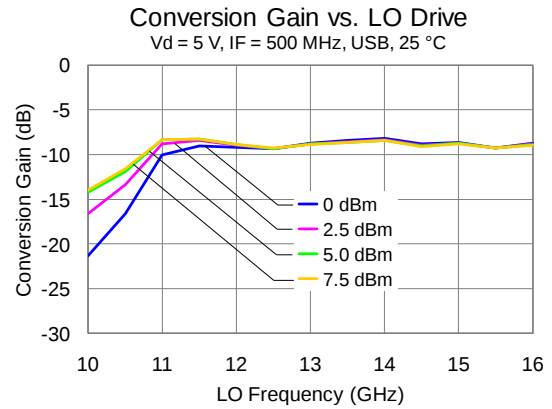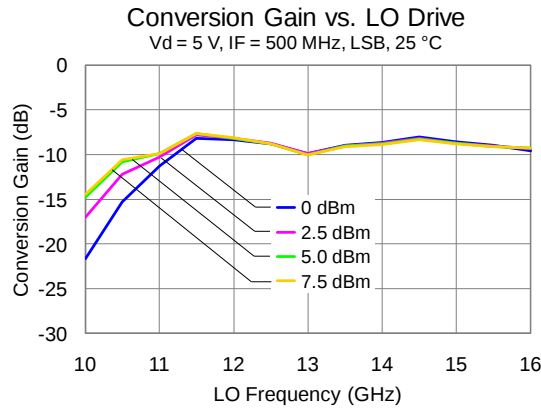







Typical Performance (cont.)

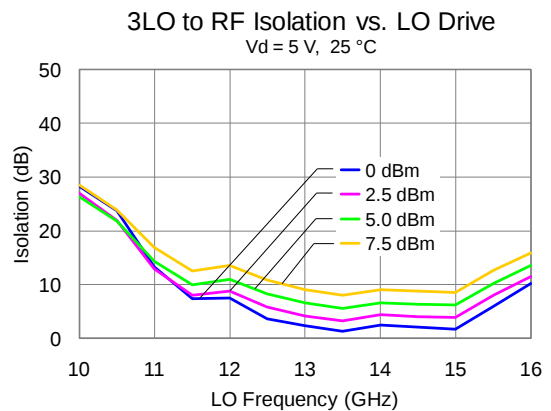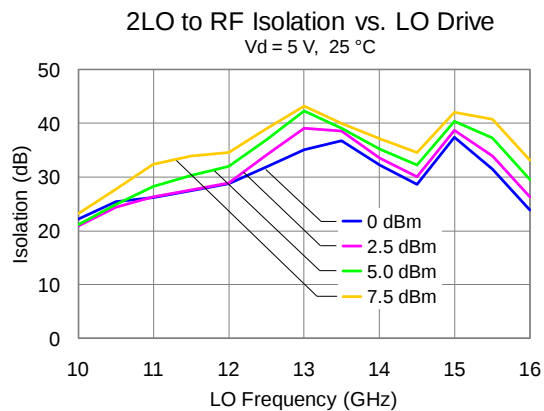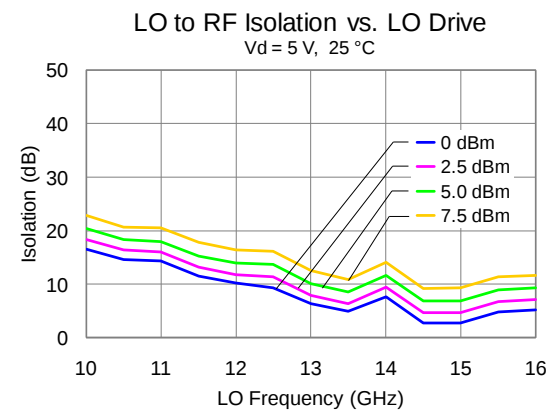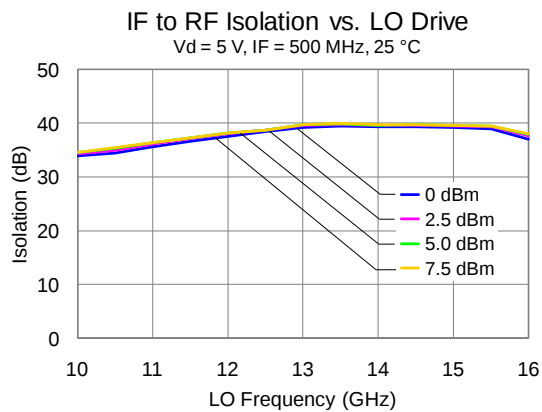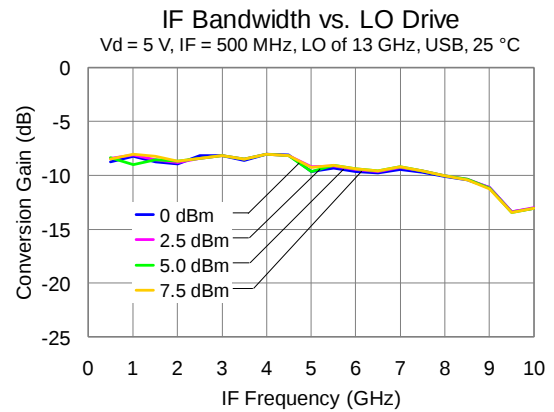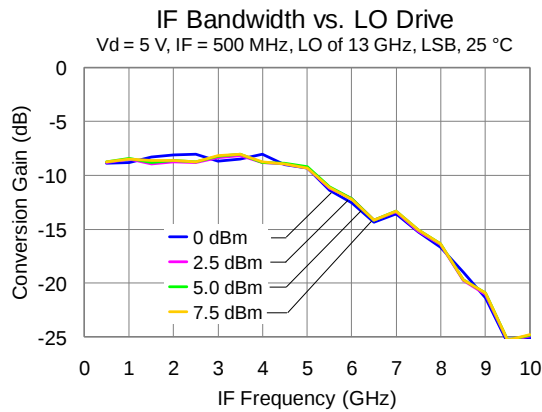







Typical Performance (cont.)

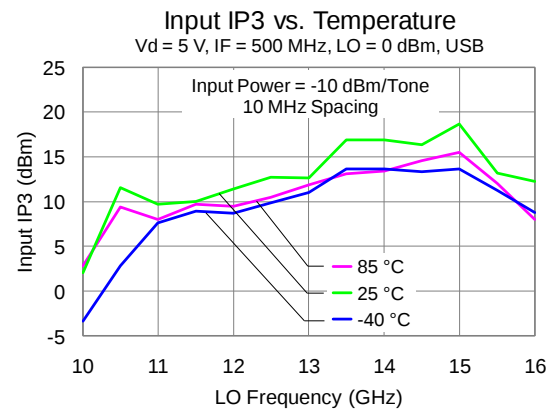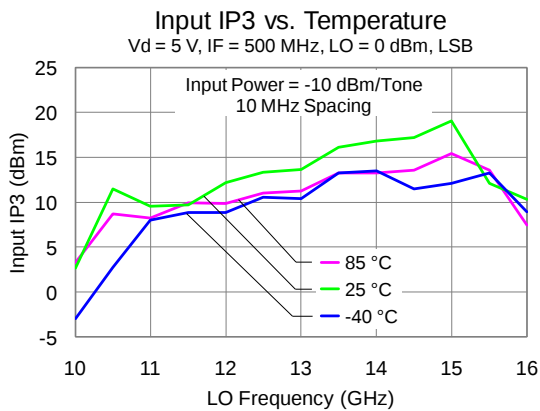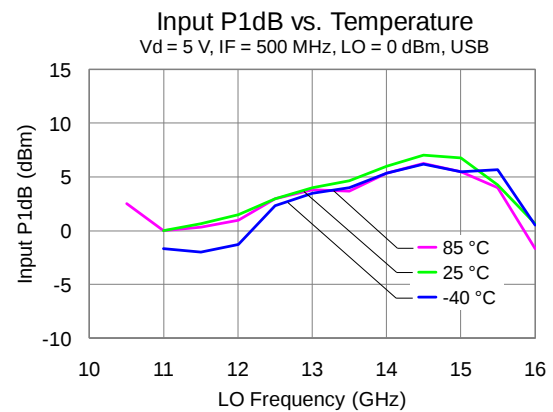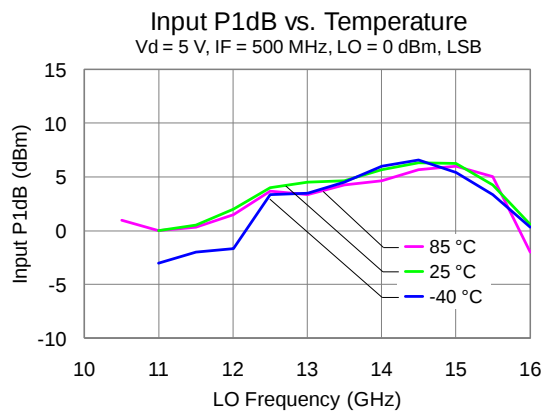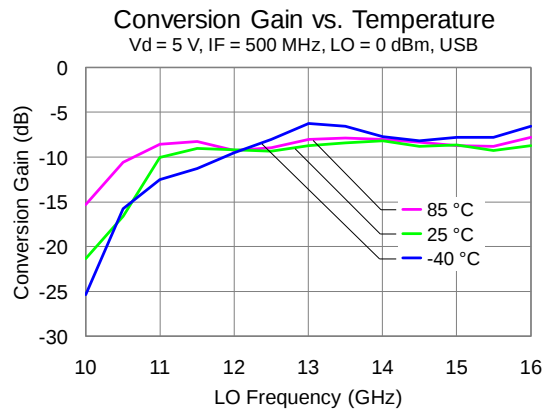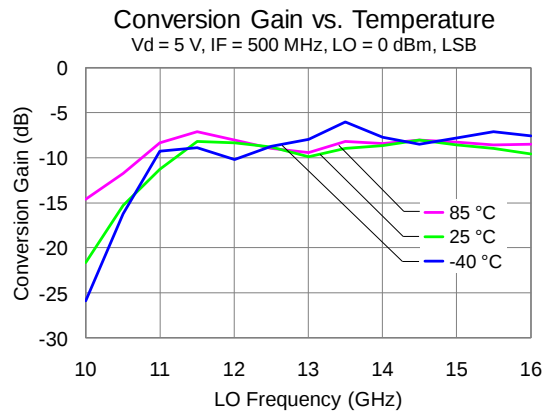




Typical Performance (cont.)

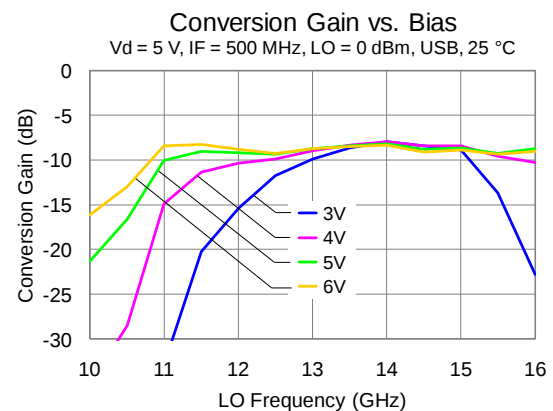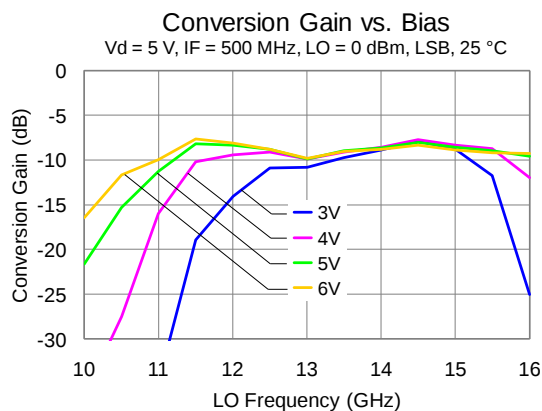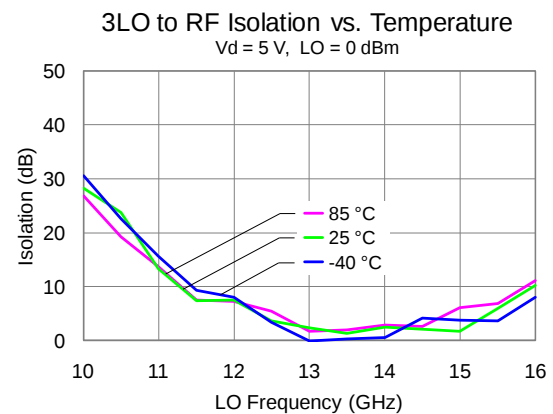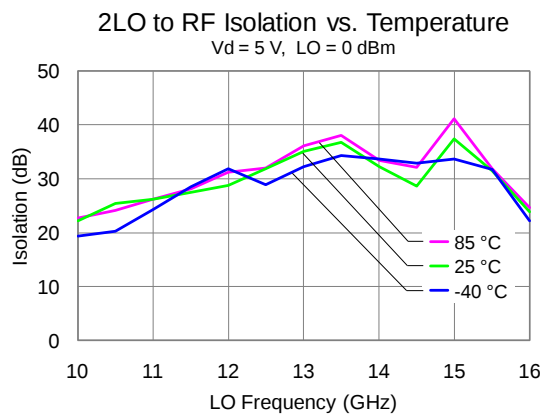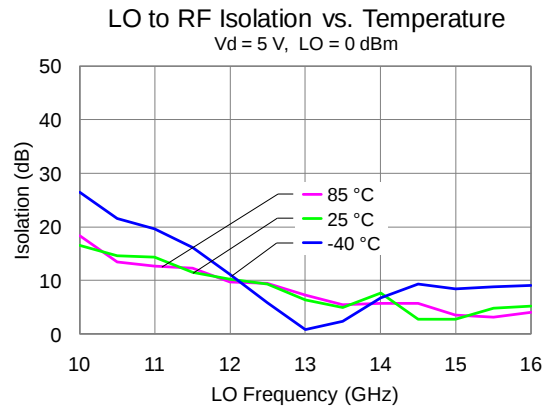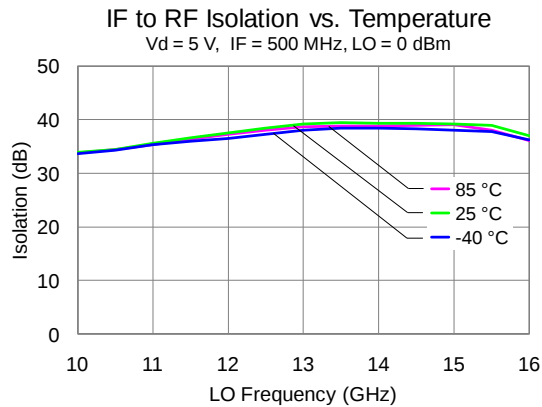

Typical Performance (cont.)

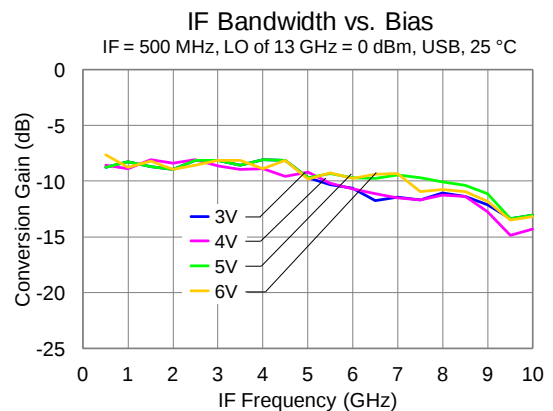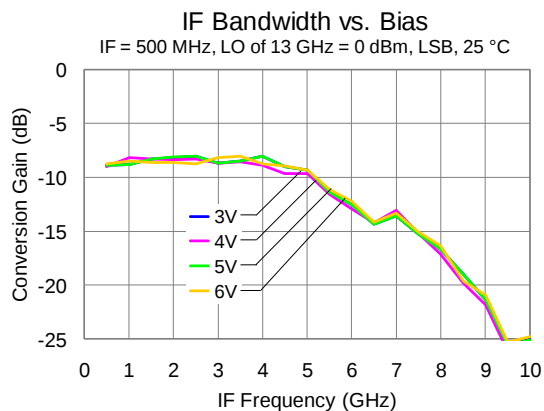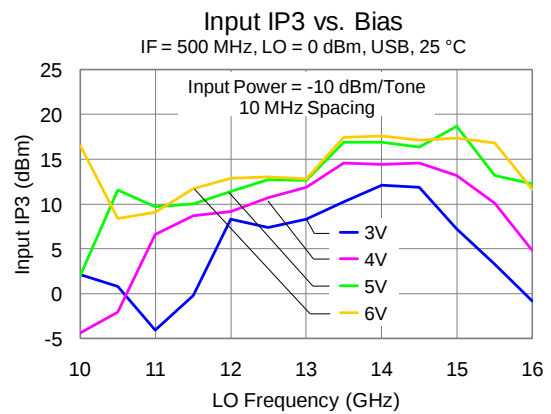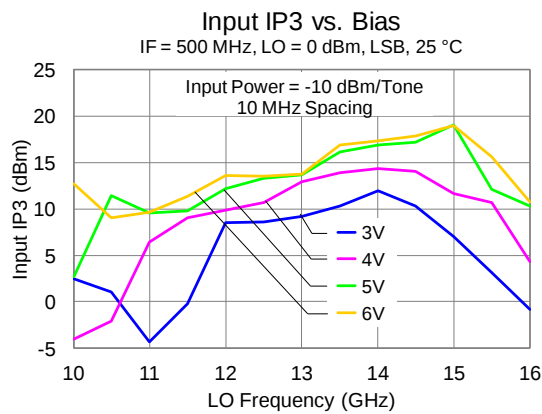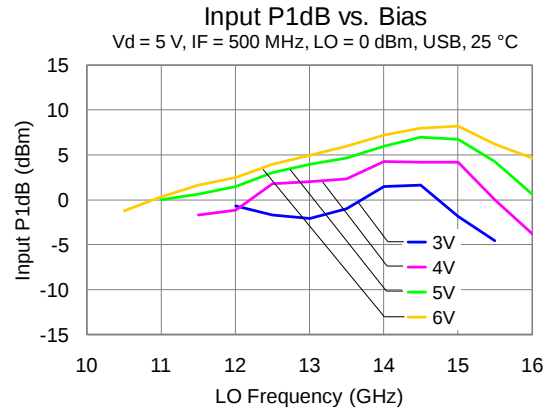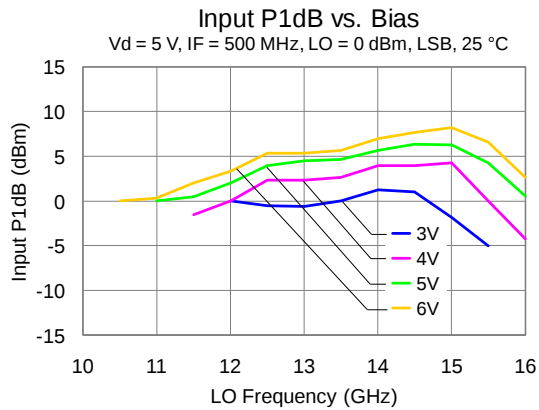

Typical Performance (cont.)

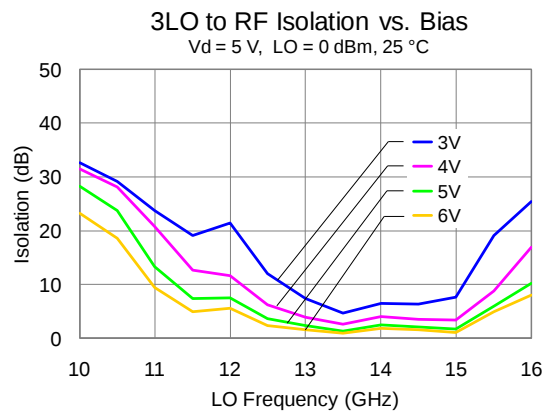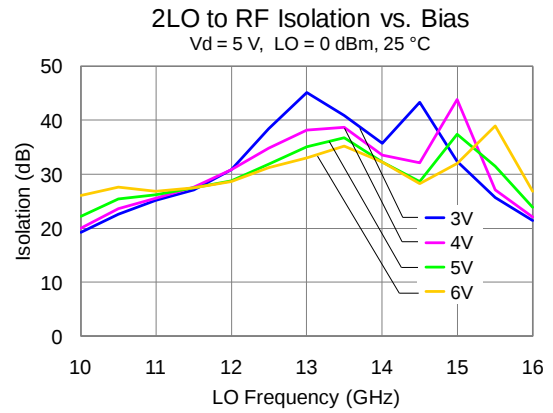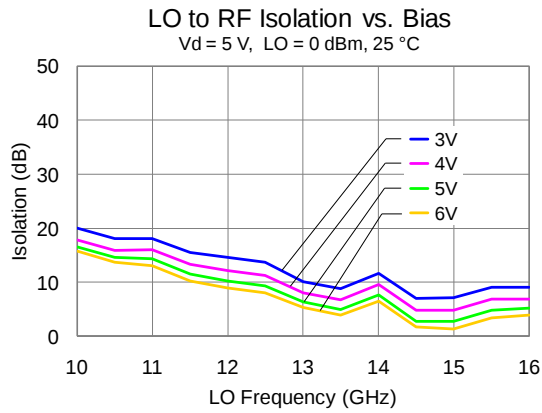


M x N Spurious Outputs

LO at 13 GHz and 0 dBm; IF at 1 GHz and -10 dBm; Vd = 5 V; 25 °C; All values are in dBc from USB.

mRF	nLO			
	3	2	1	0
-2	-32	-39	-53	-59
-1	-35	-1	-40	-24
0	18	-16	12	
1	-35	0	-35	
2	-29	-43	-42	
3		-49	-75	

Application Circuit

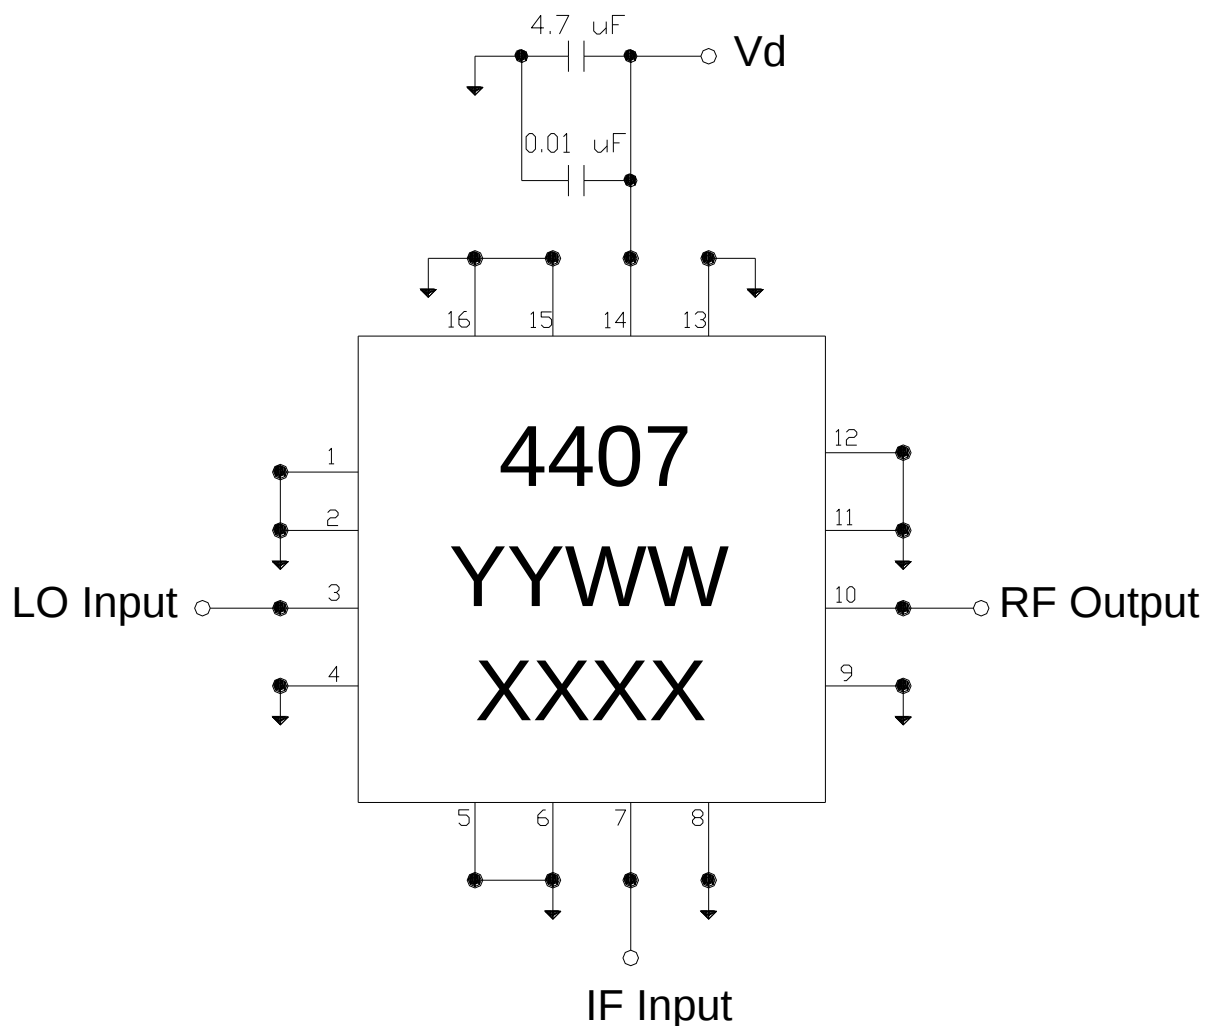

Bias-up Procedure


Set V_d to desired voltage within specified limits
Apply RF signals to LO and RF Inputs

Bias-down Procedure

Turn off RF supply
Reduce V_d to 0 V

The TGC4407-SM will be marked with the “4407” designator and a lot code marked below the part designator. The “YY” represents the last two digits of the year the part was manufactured, the “WW” is the work week, and the “XXXX” is an auto-generated number.

Pin Description

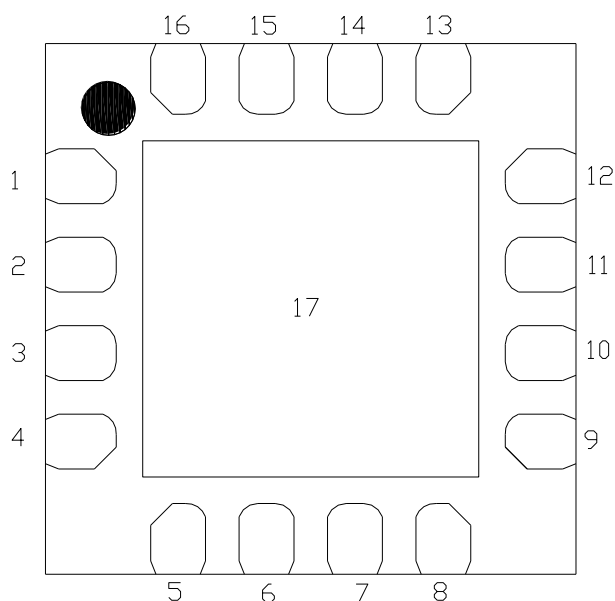

Pin	Symbol	Description
1, 5, 12, 13, 15, 16	N/C	No internal connection; must be grounded on PCB.
2, 4, 6, 8, 9, 11	GND	Internal Grounding; must be grounded on PCB.
3	LO IN	Local Oscillator Input, matched to 50 ohms, AC Coupled.
7	IF IN	IF Input matched to 50 ohms, DC Coupled.
10	RF OUT	RF Output matched to 50 ohms, AC Coupled.
14	Vd	Drain voltage. Bias network is required; see Application Circuit on page 10 as an example.
17	GND	Backside Paddle. Multiple vias should be employed to minimize inductance and thermal resistance; see Mounting Configuration on page 14 for suggested footprint.

TGC4407-SM

Ka-Band Up-Converter



Applications Information

PC Board Layout

Top RF layer is 0.008" thick Rogers RO4003, $\epsilon_r = 3.38$, with 0.062" FR4 stiffener. Metal layers are 1-oz copper. The 50 Ω transmission line is a Grounded Coplanar Waveguide Interface.

The pad pattern shown has been developed and tested for optimized assembly at TriQuint Semiconductor. The PCB land pattern has been developed to accommodate lead and package tolerances. Since surface mount processes vary from company to company, careful process development is recommended.

For further technical information, refer to the [TGC4407-SM](#) Product Information page.

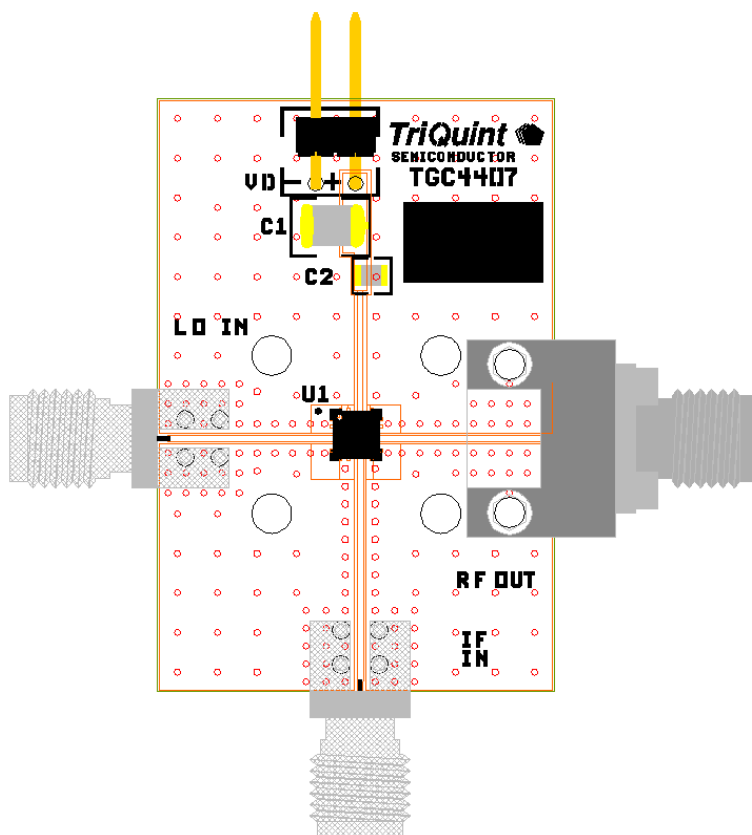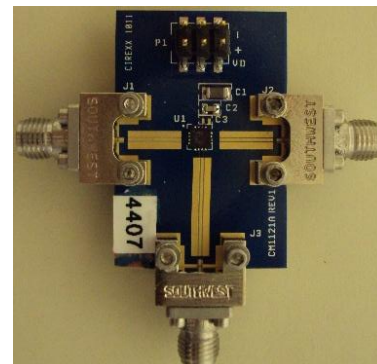



Bill of Material

Ref Des	Value	Description	Manufacturer	Part Number
C1	4.7 μ F	Cap, 1206, 20V, 5%, X7R	various	
C2	0.01 μ F	Cap, 0603, 25V, 5%, X5R	various	


Mechanical Information

Package Information and Dimensions


All dimensions are in millimeters.

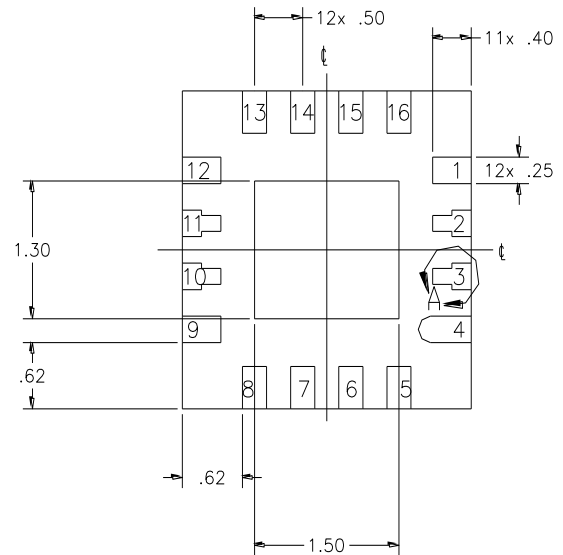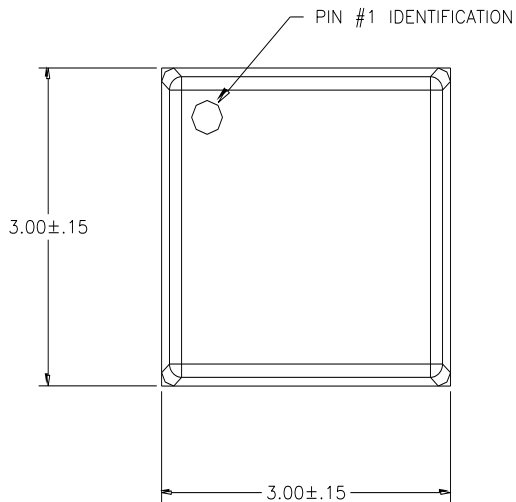

BOTTOM VIEW



DETAIL A

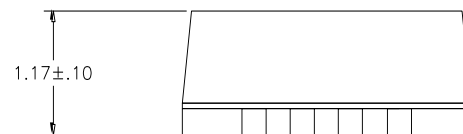

SIDE VIEW

This package is lead-free/RoHS-compliant with a copper alloy base (CDA194), and the plating material on the leads is 100% matte Sn. It is compatible with both lead-free (maximum 260 °C reflow temperature) and tin-lead (maximum 245 °C reflow temperature) soldering processes.


Mechanical Information (cont.)

Mounting Configuration

All dimensions are in millimeters (inches).


Notes:

1. Ground vias are critical for the proper performance of this device. Vias have a final plated thru diameter of .40 mm (.016").

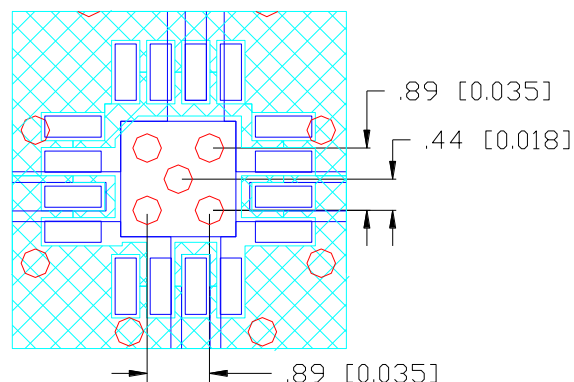

Tape and Reel Information

Tape and reel specifications for this part are also available on the TriQuint website in the “Application Notes” section.
Standard T/R size = 500 pieces on a 7 x 0.5” reel.

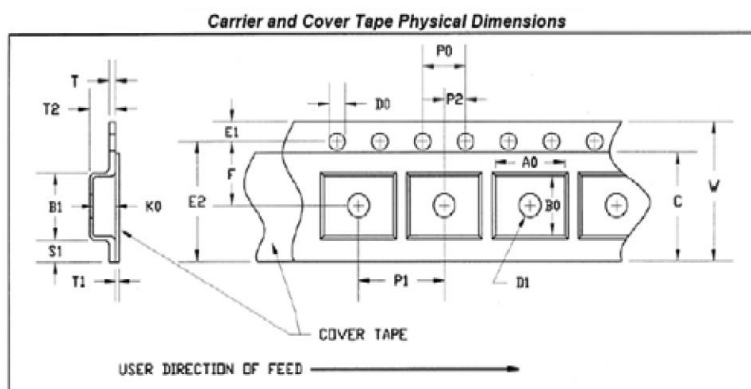

CARRIER AND COVER TAPE DIMENSIONS

Part	Feature	Symbol	Size (in)	Size (mm)
Cavity	Length	A0	0.134	3.4
	Width	B0	0.126	3.2
	Depth	K0	0.055	1.4
	Pitch	P1	0.315	8.0
Distance Between Centerline	Cavity to Perforation Length Direction	P2	0.079	2.0
	Cavity to Perforation Width Direction	F	0.217	5.5
Cover Tape	Width	C	0.374	9.5
Carrier Tape	Width	W	0.472	12.0

Product Compliance Information

ESD Information



Caution! ESD-Sensitive Device

ESD Rating: Class 0
Value: ≥ 200 V and < 250 V
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

MSL Rating

Level MSL1 at $+260$ °C convection reflow
The part is rated Moisture Sensitivity Level MSL1 at 260°C per JEDEC standard IPC/JEDEC J-STD-020.

Solderability

Compatible with the latest version of J-STD-020, Lead free solder, 260°C

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).


This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($\text{C}_{15}\text{H}_{12}\text{Br}_4\text{O}_2$) Free
- PFOS Free
- SVHC Free

ECCN

US Department of Commerce EAR99

Recommended Soldering Temperature Profile

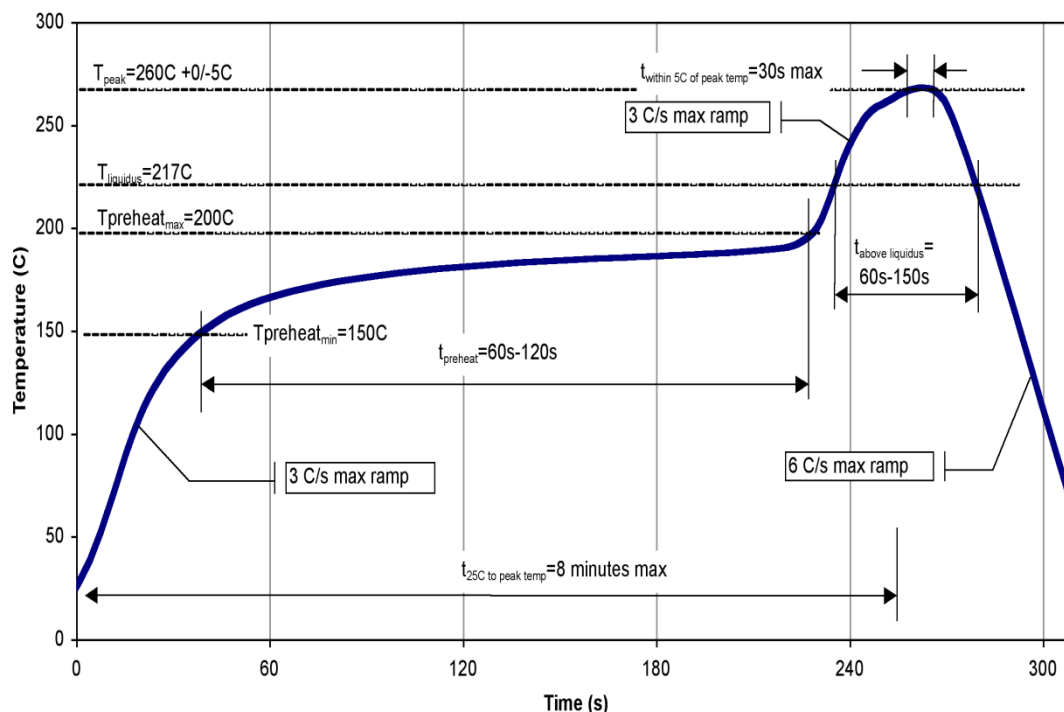

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@tqs.com

Tel: +1.972.994.8465
Fax: +1.972.994.8504

For technical questions and application information:

Email: info-networks@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.