

Cooper Bussmann

[Homepage](#)
[About Cooper Bussmann](#)
[Contact Us](#)
[Privacy](#)
[Legal](#)
[Cooper Bussmann® Brand](#)
[Site Map](#)

**FNA-2**

Pin Indicating, Time-Delay, Supplementary Fuses, 13/32 x 1-1/2 Inches

Product Information

Product Type:	Fuse
Product Family:	Electrical Power
Brand:	Cooper Bussmann

Recommended Products

Rec. Fuse Block:	BM603 Series
Rec. Fuse Clips:	5960 Series

Physical Properties

Dimensions:	1.5in.(L) x 0.41in.(W) x 0in.(H)
-------------	----------------------------------

Certifications[UL Listed](#)[CSA Certified](#)**Electrical Properties**


Maximum AC Voltage:	125
Amperage Rating:	2
AC Interrupting Ratings:	10000 at 125V
Time Delay:	Yes

Pin Indicating Type

Dual-Element, Time-Delay

1/10–30 Amps

Dimensional Data

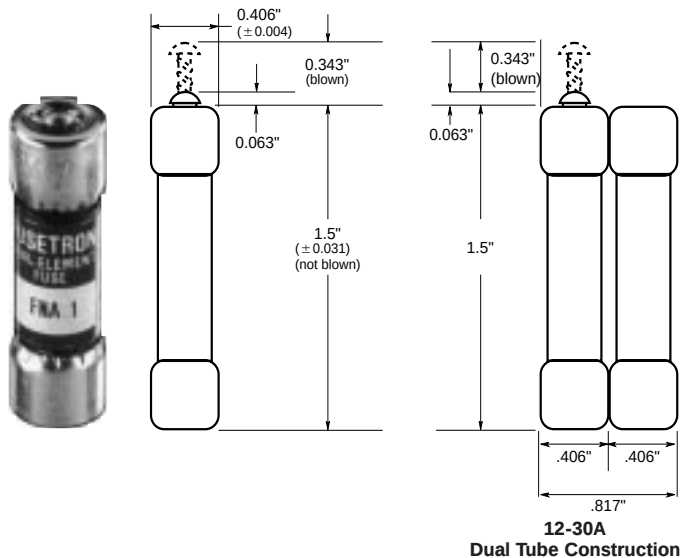

CATALOG SYMBOL: FNA (5AG) 1/10-10A
DUAL-ELEMENT, TIME-DELAY
1/10 TO 30 AMPERES

U.L. LISTED:

1/10-8/10A, IR 35A@ 250V
IR 10kA@ 125V
1-15A, IR 10kA@ 125V
(GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED

0-10/125V A
(CLASS 1422-01, FILE # 53787)

Electrical Ratings (Catalog Symbol and Amperes)

250 Volts AC IR*	125 Volts AC IR	125 Volts AC IR	125 Volts AC
FNA-1/10	FNA-1	FNA-3	FNA-9
FNA-1/8	FNA-1-1/8	FNA-3-2/10	FNA-10 IR
FNA-15/100	FNA-1-1/4	FNA-3-1/2	FNA-12 10,000A
FNA-2/10	FNA-1-4/10	FNA-4	FNA-15
FNA-1/4	FNA-1-1/2	FNA-4-1/2	32 Volts AC†
FNA-3/10 IR 35A	FNA-1-6/10 IR 10,000A	FNA-5 IR 10,000A	FNA-20 IR 1kA
FNA-4/10	FNA-1-8/10	FNA-5-6/10	FNA-25
FNA-1/2	FNA-2	FNA-6	FNA-30
FNA-6/10	FNA-2-1/4	FNA-6-1/4	—
FNA-3/4	FNA-2-1/2	FNA-7	—
FNA-8/10	FNA-2-8/10	FNA-8	—


*Interrupting rating of 10,000A at 125V AC.

†Interrupting rating of 1,000A at 32V.

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight Lbs.	Kg.
0-10	100	1.5	0.650
12-30	100	3.0	1.36

Time-Current Characteristic Curves—Average Melt

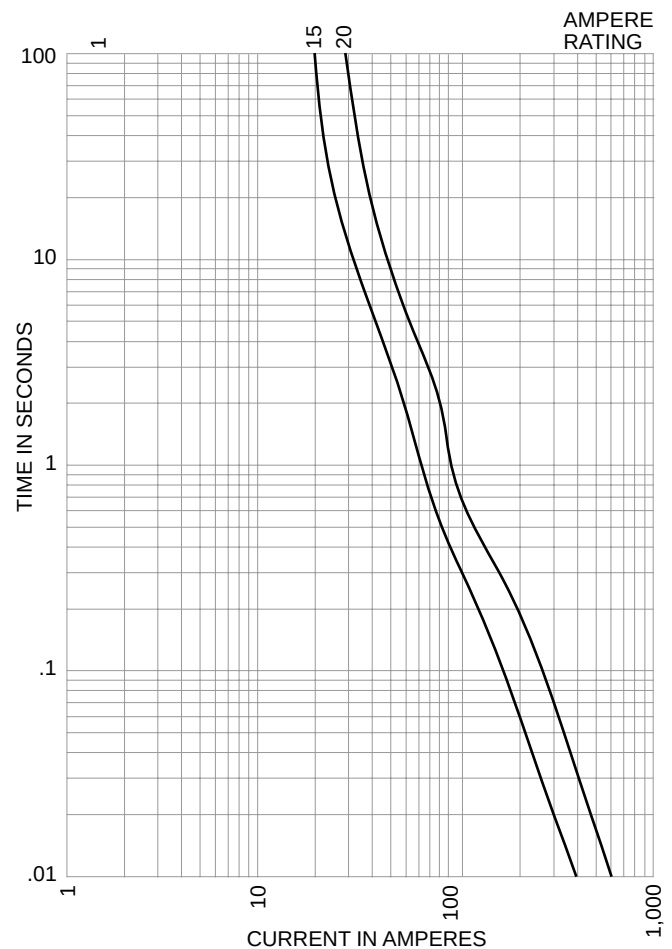

- Use in power electronic circuits in which there are high inrush currents and fuse openings must be quickly apparent.
- Has silver-plated pin for positive, electrical signal activation.
- FNAs larger than 10 amperes have dual-tube construction.
- Mount in Buss fuseblock 3839 for signal indication.
- Mount in HPF-C panel-mounted fuseholder or BM series fuseblocks for visual indication.

CE