



LOCAL AREA
NETWORKS
(LAN)



SERVERS



DATA
CENTRES



CASH
REGISTERS



TELECOM-
MUNICATIONS
DEVICES



INDUSTRIAL
PLCS



EMERGENCY
DEVICES
(Lights/Alarms)

Sentinel Dual *Low Power*

1-3 kVA
Single-phase



Highlights

- Simplified installation
- Installation versatility
- Low running costs
- Runtime expandability
- Low noise output
- On-line (VFI)



SENTINEL DUAL is a new range of high density double conversion on-line UPS, suitable for powering a wide range of devices including servers, storage systems, telephony equipment - VoIP, network, medical and industrial systems.

SENTINEL DUAL are ideal for powering and protecting Blade Server systems with high input power factor.

At only 2U, SENTINEL DUAL is ideal for 19" rack cabinet installations.

SENTINEL DUAL has a practical, modern design and includes several

performance advantages over traditional on-line UPS. All developed by the Riello UPS research and development team.

The newly-designed inverter is one of the best energy conversion systems on the market, with a 0.9 output power factor and 92% operating efficiency in on-line mode.

For critical applications requiring long battery runtimes, extension packs and ER versions with larger battery chargers are available.

As an ECO UPS product, SENTINEL DUAL is also fitted with a shut-off button to reduce energy consumption to zero during prolonged periods of inactivity.

Simplified installation

- SENTINEL DUAL can be installed as a tower or in 19" rack cabinets, by simply removing and rotating the mimic panel
- Low noise (<40dBA) thanks to a high frequency switching inverter and load-dependent digitally controlled ventilation.
- Features guaranteed up to 40°C (the components are designed for high temperatures and thus subject to less stress at normal temperatures)
- On SENTINEL DUAL models, the output sockets can be programmed to disconnect less critical loads during blackouts (Power Share function).

Installation versatility

SENTINEL DUAL can be used in a tower or rack format, by simply turning the display and adding the supplied feet or optional runners.

Reduced running costs

The UPS is highly flexible and easy to configure. Programmable functions can be set using the software supplied or manually via the front mimic panel. SENTINEL DUAL can be configured in the following operating modes:

- On-line Mode: maximum protection and output voltage waveform quality
- ECO Mode: to increase output (up to 98%), using Line Interactive operation.
- Smart Active Mode: the UPS automatically decides upon the best operating mode based on the quality of the network - On-line or Line interactive.
- Back-up Mode: the UPS can be selected to function only when the mains power supply fails.

- Frequency converter (50 or 60 Hz)
- Multi-platform communication for all operating systems and network environments; supervision and shutdown PowerShield³ software for Windows operating systems 7, 2008, Vista, 2003, XP, Linux, Mac OS X, Sun Solaris, VMware ESX and other Unix operating systems.
- Standard UPS Tools software supplied for configuration and customisation
- RS232 serial port and opto-isolated contacts
- USB Port
- Slot for communication boards such as Modbus/Jbus, TCP/IP, SNMP and relay contacts

Emergency function

This configuration is designed for emergency systems including lighting, fire detection/exit systems and alarms. When the mains power supply fails, the inverter begins powering the loads with a progressive start (Soft Start) in order to prevent overload.

High quality output voltage

- Even with non-linear loads (loads with a crest factor of up to 3:1)
- High short circuit current on Bypass
- High overload capacity 150% on inverter (even with mains failure).
- Filtered, stabilised and reliable voltage (On-line double conversion technology (VFI compliant with EN62040-2 class C1) with filters for the suppression of atmospheric disturbances.
- Power factor correction: UPS input power factor, close to 1 and sinewave current absorption

High battery reliability

- Automatic and manual battery test
- Batteries are user replaceable without interruption to the load (Hot Swap)

- Unlimited extendible runtime using matching battery boxes.

Reduced noise

Thanks to the use of high frequency components and load-based fan speed control, the noise produced by the UPS is less than 40dB.

Other features

- Output voltage can be selected using software (220-230-240V)
- Auto-restart when mains power is restored (programmable via software)
- Stand-by on Bypass: when the UPS is switched off, it automatically goes into bypass and battery charging mode
- Minimum load switch-off
- Battery discharge warning
- Start-up delay
- Total microprocessor control
- Automatic bypass without interruption
- Status, measurements and alarms available on standard, backlit display.
- UPS firmware updating via PC
- Input protection through resettable thermal switch (versions up to 1500VA)
- Standard Back-feed protection: to prevent energy from being fed back to the network
- Manual switching to bypass.

2-YEAR WARRANTY

1. Remove the mimic panel



2. Rotate the mimic panel and insert it into position







3. Rotate the UPS 90°



4. Attach the rack supports

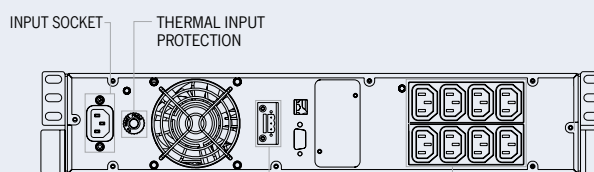



**SDH 1000****BBX****SDH 1500****SDH 2200/2200ER
3000/3000 ER****OPTIONS**

- Universal rails for installation in rack cabinets
- Multipass 16 bypass (mm/kg): 2U x 438 x 360 - rack 6.8 version weight

Battery box

MODELS	BB SDH 36-A3 / BB SDH 36-M1	BB SDH 72-A3 / BB SDH 72-M1
MODELS SDH	SDH 1000	SDH 2200-3000
Dimensions (mm)		



MODELS	SDH 1000	SDH 1500	SDH 2200	SDH 2200 ER	SDH 3000	SDH 3000 ER
POWER	1000VA/900W	1500VA/1350W	2200VA/1980W	2200VA/1760W	3000VA/2700W	3000VA/2400W
INPUT						
Nominal voltage	220-230-240 Vac					
Voltage range without battery intervention	140 Vac < Vin < 276 Vac @50% LOAD / 184 Vac < Vin < 276 Vac @ 100% LOAD					
Max allowable voltage	300 V					
Nominal frequency	50 or 60 Hz ±5Hz					
Frequency range	50 Hz ± 5% / 60 Hz ± 5%					
Power factor	> 0.98					
Current distortion	≤7%					
BY PASS						
Voltage tolerance	200 - 253 Vac					
Frequency tolerance	Frequency selected (from ±0.5Hz to ±5Hz configurable)					
OUTPUT						
Voltage distortion with linear load / with non-linear load	< 2%					
Frequency	Selectable: 50 Hz or 60 Hz or automatic selection					
Static variation	± 1%					
Dynamic variation	≤ 5% in 20 msec.					
Waveform	Sinusoidal					
Current crest factor	3 : 1					
ECO Mode and Smart Active Output	98%					
BATTERIES						
Type	VRLA AGM lead acid maintenance free batteries					
Charging time	2-4 hours					
OVERLOAD TIMES						
100% < Load < 110%	1 minute					
110% < Load < 150%	4 seconds					
Load > 150%	0.5 seconds					
OTHER FEATURES						
Net weight (kg)	17.5	18	30.5	15	31	15
Gross weight (kg)	21	21.5	35	19.5	35.5	19.5
Dimensions (hwd) (mm)	87x450x425 (2Ux19"x425)		87x450x625 (2Ux19"x625)			
Packaging dimensions (hwd) (mm)	245x550x600		245x600x760			
Surge protection	300 joule					
Protection devices	Overcurrent - short-circuit - overvoltage - undervoltage - thermal - low battery discharge protection					
Communication	USB / DB9 with RS232 and contacts / Slot for communications interface					
Input sockets	1 IEC 320 C14		1 IEC 320 C20			
Output socket	8 IEC 320 C13		8 IEC 320 C13 + 1 IEC 320 C19			
Compliance with Standards	Safety: EN 62040-1 and Directive 2006/95/EL; EMC: EN 620040-2 category C2 and Directive 2004/108/EL					
Ambient temperature	0°C / +40°C					
Relative humidity	< 95% non-condensing					
Colour	Black					
Noise level	< 40 dBA @ 1 m					
Standard equipment provided	Power cable, serial cable, USB cable, safety manual, quick start, software on CD-ROM					