


# REFERENCE FOR REEL ACCORDING TO FEEDING DIRECTION

| GAUGE   | REEL OF 5000 FEMALE CONTACTS |               | REEL OF 10000 FEMALE CONTACTS |               | GAUGE   | REEL OF 5000 PIN CONTACTS |               | REEL OF 10000 PIN CONTACTS |               |
|---------|------------------------------|---------------|-------------------------------|---------------|---------|---------------------------|---------------|----------------------------|---------------|
| # 24-28 | -                            | -             | 86566540064                   | 86566540064LF | # 24-28 | -                         | -             | 86564540064                | 86564540064LF |
| # 20-24 | -                            | -             | -                             | -             | # 20-24 | -                         | -             |                            |               |
| # 24-28 | 86566510065                  | 86566510065LF | 86566540065                   | 86566540065LF | # 24-28 | 86564510065               | 86564510065LF | 86564540065                | 86564540065LF |
| # 20-24 | 86566520065                  | 86566520065LF | 86566530065                   | 86566530065LF | # 20-24 | 86564520065               | 86564520065LF | 86564530065                | 86564530065LF |
| # 24-28 | 86566510067                  | 86566510067LF | 86566540067                   | 86566540067LF | # 24-28 | 86564510067               | 86564510067LF | 86564540067                | 86564540067LF |
| # 20-24 | 86566520067                  | 86566520067LF | 86566530067                   | 86566530067LF | # 20-24 | 86564520067               | 86564520067LF | 86564530067                | 86564530067LF |

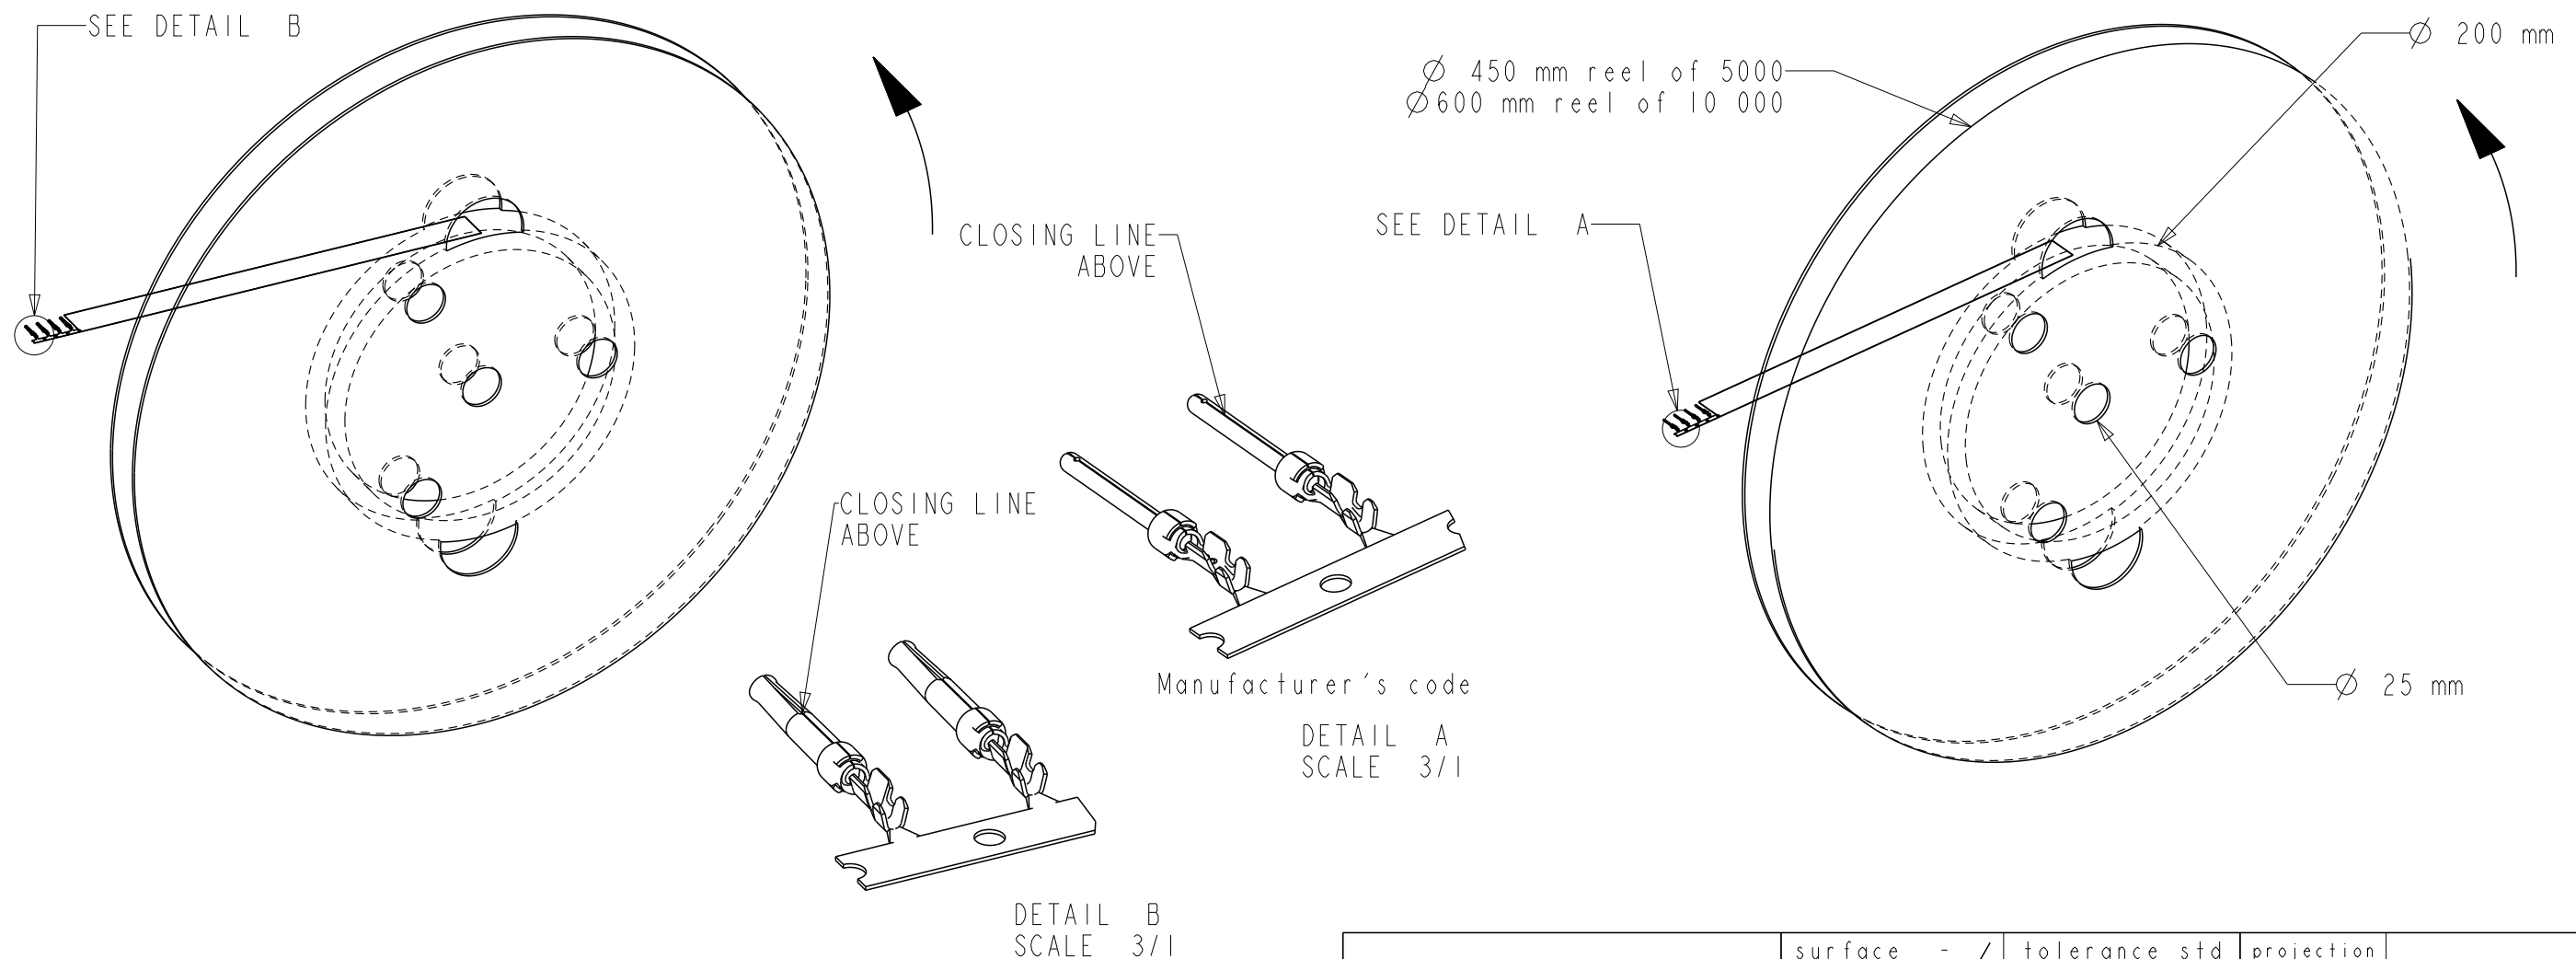

NOTE : ROHS INFORMATIONS  
The LF products meet European union directives and other country regulations as described in GS-22-008  
Terminations plating spec : 2um Nickel min + 2um Sn min  
Packaging Spec : see GS-14-920

| rev | ecn no    | dr  | date       |
|-----|-----------|-----|------------|
| K   | 111-0003  | AMR | 2011-01-06 |
| -   | -         | -   | -          |
| E   | LS06-196  | MPE | 27/11/2006 |
| F   | LS08-0096 | MPE | 2008/04/04 |
| G   | LS08-0127 | MPE | 2008/05/13 |
| H   | 109-0152  | AMR | 2009-07-27 |
| J   | 110-0070  | AMR | 2010-03-09 |

|                    |        |          |                                       |                                   |                  |          |
|--------------------|--------|----------|---------------------------------------|-----------------------------------|------------------|----------|
| www.fciconnect.com |        |          | surface<br>ISO 1302                   | tolerance std<br>ISO 406 ISO 1101 | projection<br>A3 | mm       |
|                    |        |          | TOLERANCES UNLESS OTHERWISE SPECIFIED |                                   | size             | Scale    |
| Dr                 | CJARRY | 11/07/03 | ANGULAR                               | LINEAR                            | 0.X              | ±0.3     |
| Eng                | -      | -        | 0° ±2°                                |                                   | 0.XX             | ±0.1     |
| Chr                | -      | -        |                                       |                                   | 0.XXX            | ±0.05    |
| Appr               | -      | -        | Product family                        |                                   | 8656             | Spec ref |
|                    |        |          | CRIMP CONTACTS                        |                                   | dwg no           | Rev.     |
|                    |        |          | catalog no                            |                                   | C01-8656-1536    | K        |
|                    |        |          | customer                              |                                   | sheet 1 of 2     |          |

