


Coiltronics DR124 Series

Low profile power inductors

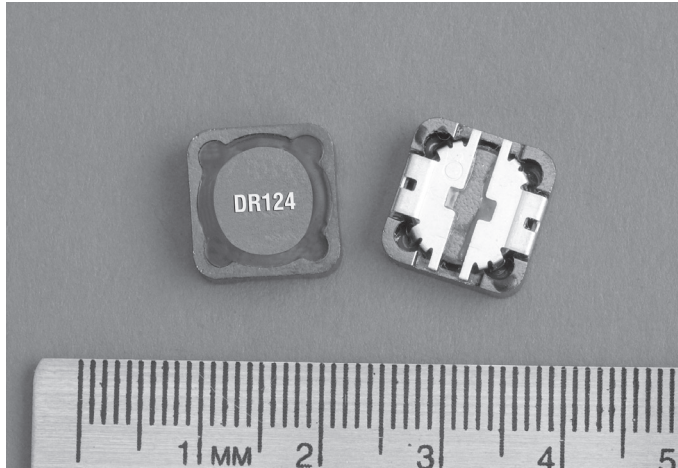

Product description

- Lead free, RoHS compliant
- 125°C maximum total temperature operation
- Low profile surface mount inductor
- 12.5mm x 12.5mm x 4.5mm shielded drum core
- Inductance range from 0.47µH to 1000µH
- Current range from 24.4 to 0.44 Amps
- Frequency range up to 1MHz
- Ferrite core material

Applications

- Notebook power, LCD panels
- Computer, DVD players, and portable power devices
- DC-DC Converters
- Buck, boost, forward, and resonant converters
- Noise filtering and filter chokes

Environmental data

- Storage temperature range (Component): -40°C to +125°C
- Operating temperature range: -40°C to +125°C (ambient + self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant

Packaging:

- Supplied in tape and reel packaging, 750 per reel



Powering Business Worldwide



The Coiltronics brand of magnetics (formerly of the Bussmann Division of Cooper Industries) is now part of Eaton's Electrical Group, Electronics Division.




Coiltronics is now part of Eaton
Same great products plus even more.

Product specifications

Part Number	Rated Inductance (μH)	OCL ¹ μH±20%	I _{rms} ² Amps	I _{sat} ³ Amps	DCR mΩ @20°C Typ	DCR mΩ @20°C Max	K-factor ⁴
DR124-R47-R	0.47	0.42	16.0	24.40	2.2	2.7	17.51
DR124-1R0-R	1.0	0.83	13.9	18.00	3.00	3.6	12.50
DR124-1R5-R	1.5	1.37	11.1	14.00	4.75	5.7	9.73
DR124-2R2-R	2.2	2.04	9.1	11.45	5.92	7.1	7.96
DR124-3R9-R	3.9	3.80	7.0	8.40	12.50	15.0	5.84
DR124-4R7-R	4.7	4.88	6.5	7.65	13.50	16.2	5.15
DR124-6R8-R	6.8	6.10	5.6	6.47	18.06	21.7	4.61
DR124-8R2-R	8.2	7.45	5.2	6.22	21.67	26.0	4.17
DR124-100-R	10	8.94	4.5	5.80	23.33	28.0	3.81
DR124-120-R	12	11.5	4.1	4.96	31.67	38.0	3.50
DR124-150-R	15	14.2	3.6	4.62	37.30	44.8	3.02
DR124-180-R	18	16.2	3.4	4.32	46.97	56.4	2.82
DR124-220-R	22	20.7	3.2	3.83	53.99	64.8	2.50
DR124-270-R	27	25.7	2.8	3.44	66.67	80.0	2.24
DR124-330-R	33	31.2	2.6	3.12	80.83	97.0	2.04
DR124-390-R	39	37.3	2.3	2.85	110.00	132.0	1.86
DR124-470-R	47	44.0	2.2	2.63	124.66	149.6	1.72
DR124-560-R	56	54.9	2.0	2.35	144.32	173.2	1.54
DR124-680-R	68	67.1	1.8	2.13	183.33	220.0	1.39
DR124-820-R	82	80.5	1.7	1.94	212.72	255.3	1.27
DR124-101-R	100	95.1	1.5	1.79	256.67	308.0	1.17
DR124-121-R	120	111	1.3	1.65	311.18	373.4	1.08
DR124-151-R	150	146	1.3	1.44	371.02	445.2	0.94
DR124-181-R	180	179	1.1	1.30	501.66	602.0	0.87
DR124-221-R	220	216	1.0	1.15	558.00	669.6	0.77
DR124-271-R	270	256	0.88	1.09	725.00	870.0	0.71
DR124-331-R	330	327	0.83	0.92	825.00	990.0	0.63
DR124-471-R	470	460	0.68	0.74	1242.50	1491.0	0.53
DR124-681-R	680	669	0.56	0.65	1845.83	2215.0	0.45
DR124-821-R	820	825	0.53	0.62	2109.17	2351.0	0.40
DR124-102-R	1000	998	0.44	0.53	2898.00	3477.00	0.37

1. Open Circuit Inductance Test Parameters: 100kHz, 0.25V, 0.0Adc.
2. I_{rms}: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.
3. I_{sat}: Amps peak for approximately 25% rolloff (@25°C).

4. K-factor: Used to determine B_{pp} for core loss (see graph).
B_{pp} = K*L*ΔI, B_{pp} (mT), K: (K factor from table), L: (Inductance in μH), ΔI (Peak to peak ripple current in Amps).
5. Part Number Definition: DR124-xxx-R
- DR124 = Product code and size; -xxx = Inductance value in uH;
- R = decimal point; If no R is present, third character = # of zeros.
- "-R" suffix = RoHS compliant



wwlly = Date code, R = Revision level.

Technical drawing of a 12-hole punch tool. The drawing includes a side view (SECTION A-A) and a top view.

SECTION A-A

Dimensions and labels for SECTION A-A:

- $A_o = 13.2 \text{ mm}$
- $B_o = 13.2 \text{ mm}$
- $A_1 = 10 \text{ mm}$
- $B_1 = 10 \text{ mm}$
- $K_o = 5.2 \text{ mm}$
- Total length: 126

Top View


Dimensions and labels for the top view:

- Total length: 126
- Total width: 24.0
- Distance from left edge to center of first hole: 4.0
- Distance between centers of first and fourth holes: 16.0
- Distance from center of fourth hole to right edge: 1.75
- Central section length: 10
- Central section width: 10
- Label: DB12# R
- Label: www.bjy R


User direction of feed →

Parts packaged on 13" Diameter reel, 750 parts per reel.

Temperature rise vs. loss

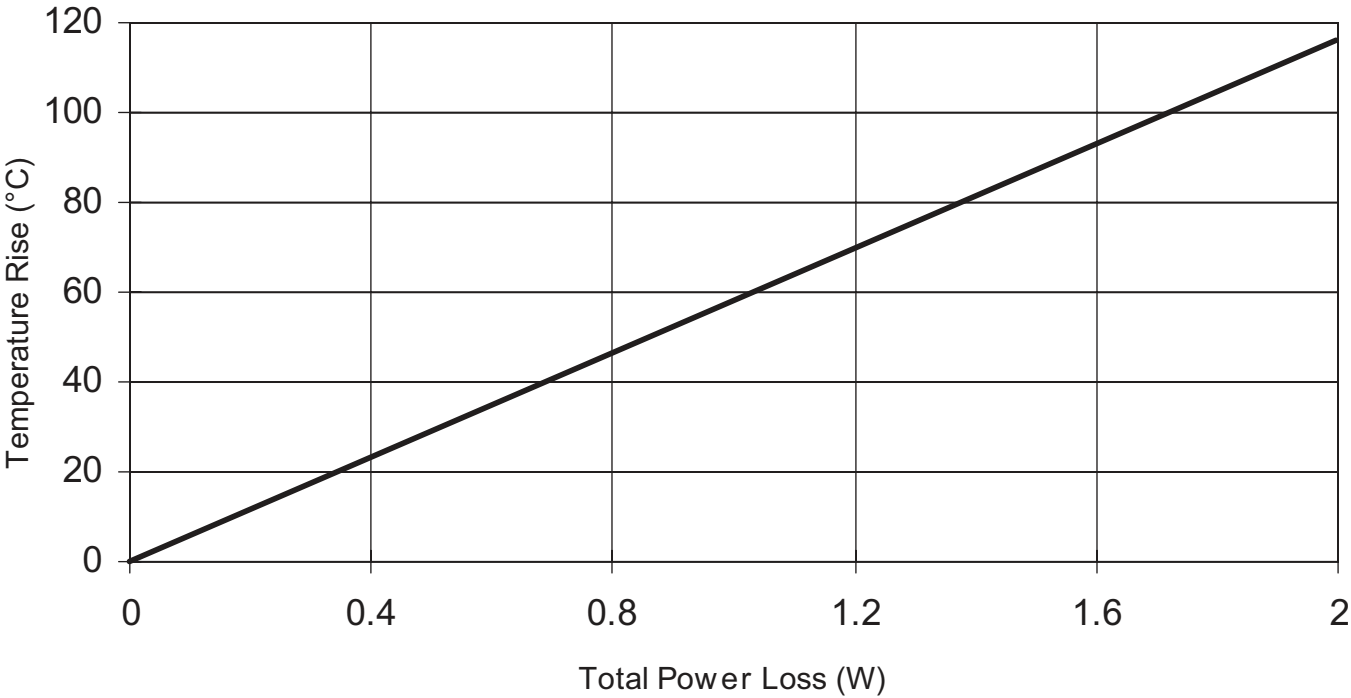

Inductance characteristics

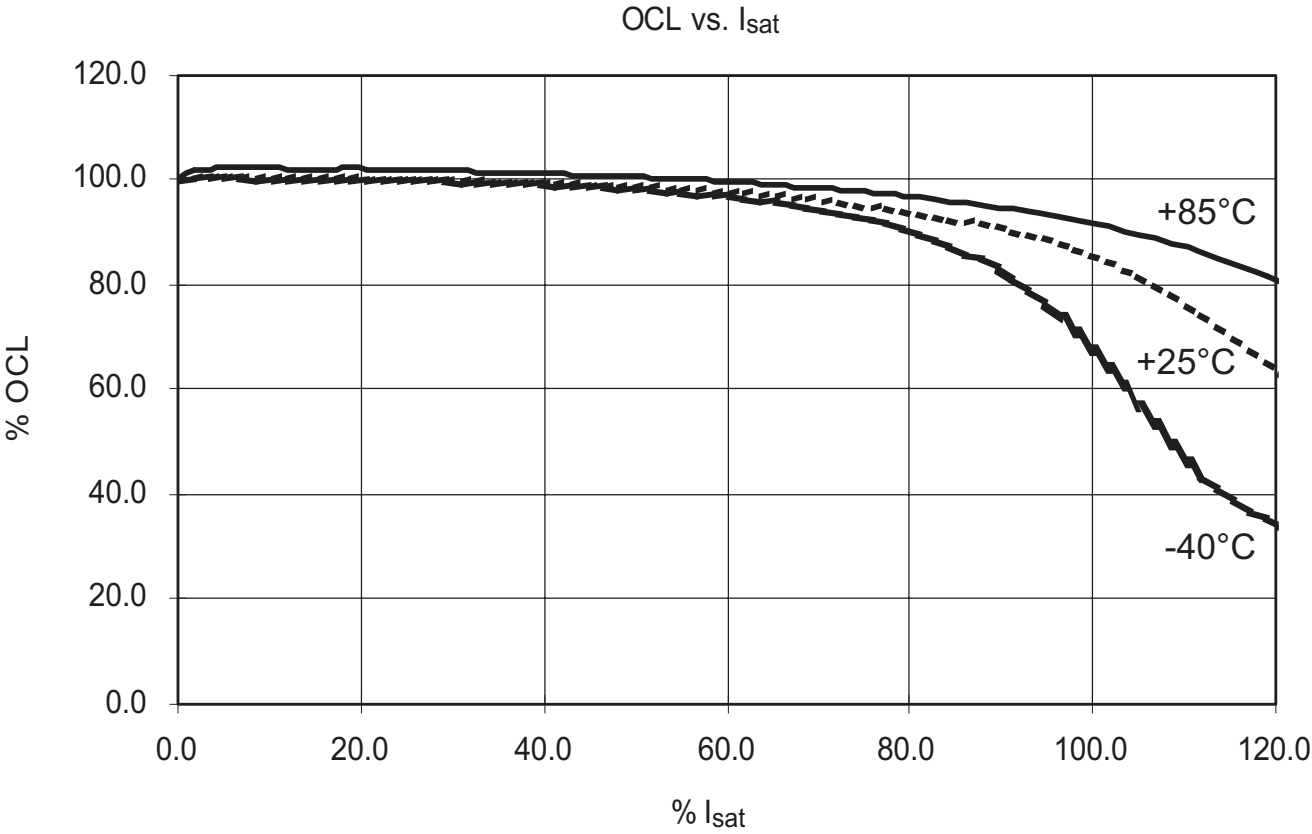

Solder reflow profile

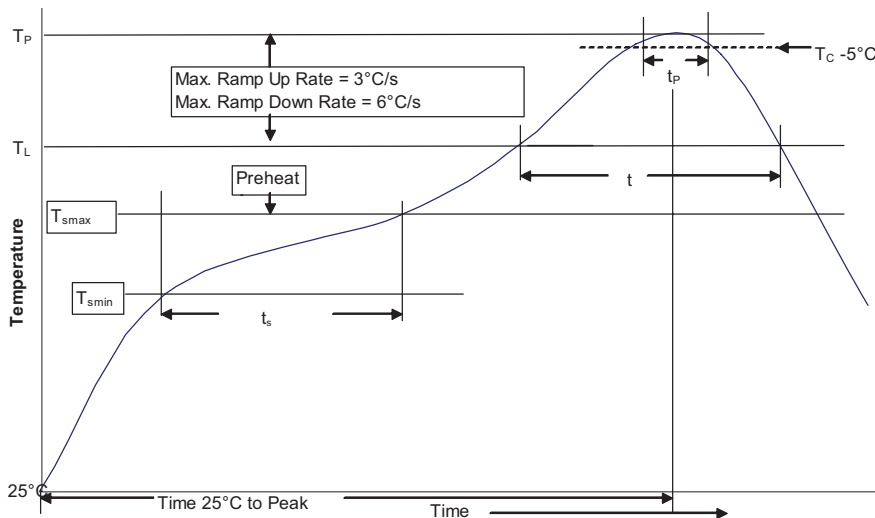


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T _{smin})	100°C	150°C
• Temperature max. (T _{smax})	150°C	200°C
• Time (T _{smin} to T _{smax}) (t _s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T _{smax} to T _p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T _L)	183°C	217°C
Time at liquidous (t _L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T _p)*	Table 1	Table 2
Time (t _p)** within 5 °C of the specified classification temperature (T _C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T _p to T _{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

North America

Eaton's Electrical Group
Electronics Division
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Eaton's Electrical Group
Electronics Division
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Eaton's Electrical Group
Electronics Division
Burton-on-the-Wolds
Leicestershire, LE 12 5th UK
Phone: +44 (0) 1509 882 600
Fax: +44 (0) 1509 882 786

Eaton's Electrical Group
Electronics Division
Avda Santa Eulalia, 290
Terrassa, Barcelona 08223 Spain
Phone: +34-93-736-2813
Fax: +34-93-783-5055

Asia Pacific

Eaton's Electrical Group
Electronics Division
No.2, #06-01
Serangoon North Avenue 5
Singapore 554911
Tel: +65 6645 9888
Fax: +65 6728 3155

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

**Eaton's Electrical Group
Electronics Division**
114 Old State Road
Ellisville, MO 63021
United States
www.eaton.com/elx

© 2014 Eaton
All Rights Reserved
Publication No. 4141 — BU-SB14114
April 2014

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

www.eaton.com/elx