


253-546
282-637




VAL-U-VAC[®]

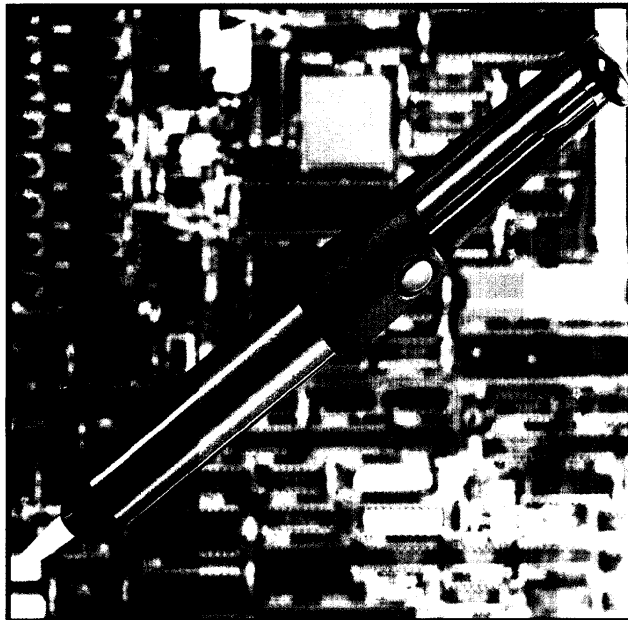

VAL-U-VAC

BODY MADE FROM METALIC FLECKED ENGINEERING THERMOPLASTIC FOR DISTINCTIVE HIGH QUALITY APPEARANCE.


CAT. NO. 573
REPLACEMENT NOZZLE
ASSEMBLY AND VACUUM
RING 5731

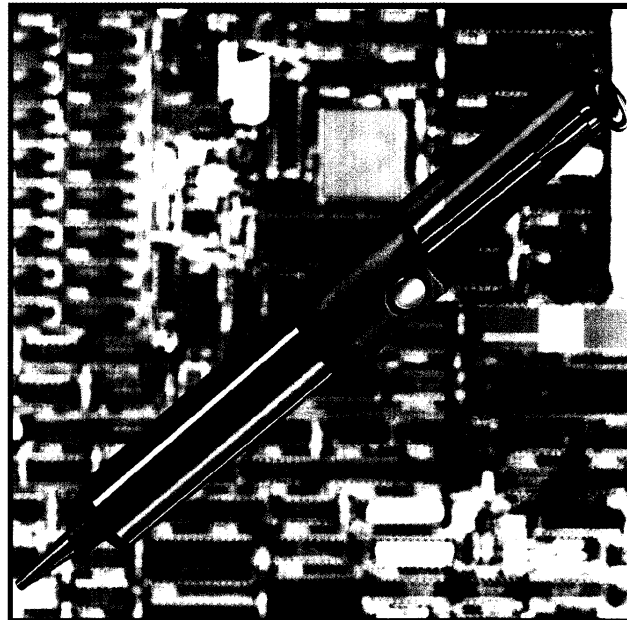

ANTISTATIC VAL-U-VAC

COMPONENTS MANUFACTURED FROM CARBON FILLED MATERIALS TO ENSURE GOOD CONDUCTIVITY AND STATIC DISSIPATION. FULLY COMPLIES WITH CECC 15.

CAT. NO. 574
REPLACEMENT NOZZLE
ASSEMBLY AND VACUUM
RING 5741

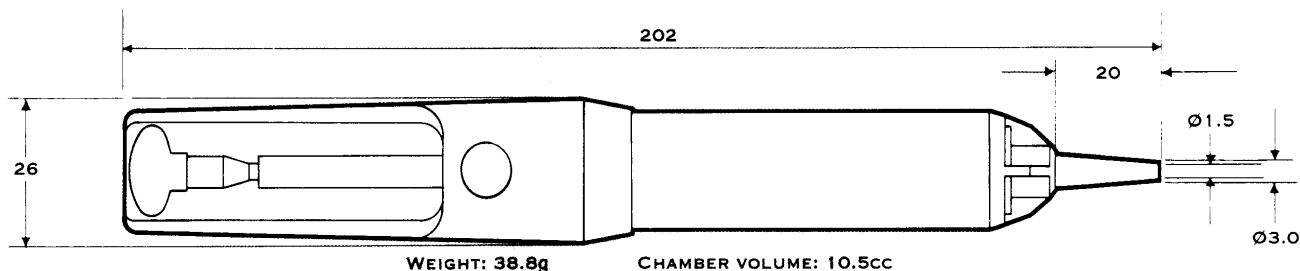

CUSTOMER BRANDING




THE VAL-U-VAC CAN BE SUPPLIED TO CUSTOMER SPECIFICATION, INCORPORATING CUSTOMER LOGO AND CHOICE OF BODY COLOUR.

ABECO VAL-U-VAC IS A REGISTERED TRADE MARK OF ABECO LTD.



VAL-U-VAC[®]

AN INGENUOUS NEW DESIGN OF DESOLDERING PUMP
FROM AB ENGINEERING, AVAILABLE IN BOTH
NORMAL AND ANTI-STATIC VERSIONS. THE VAL-U-
VAC PROVIDES THE USER WITH AN ECONOMICAL BUT
HIGH QUALITY SOLUTION TO DESOLDERING
PROBLEMS. THE VAL-U-VAC FEATURES:

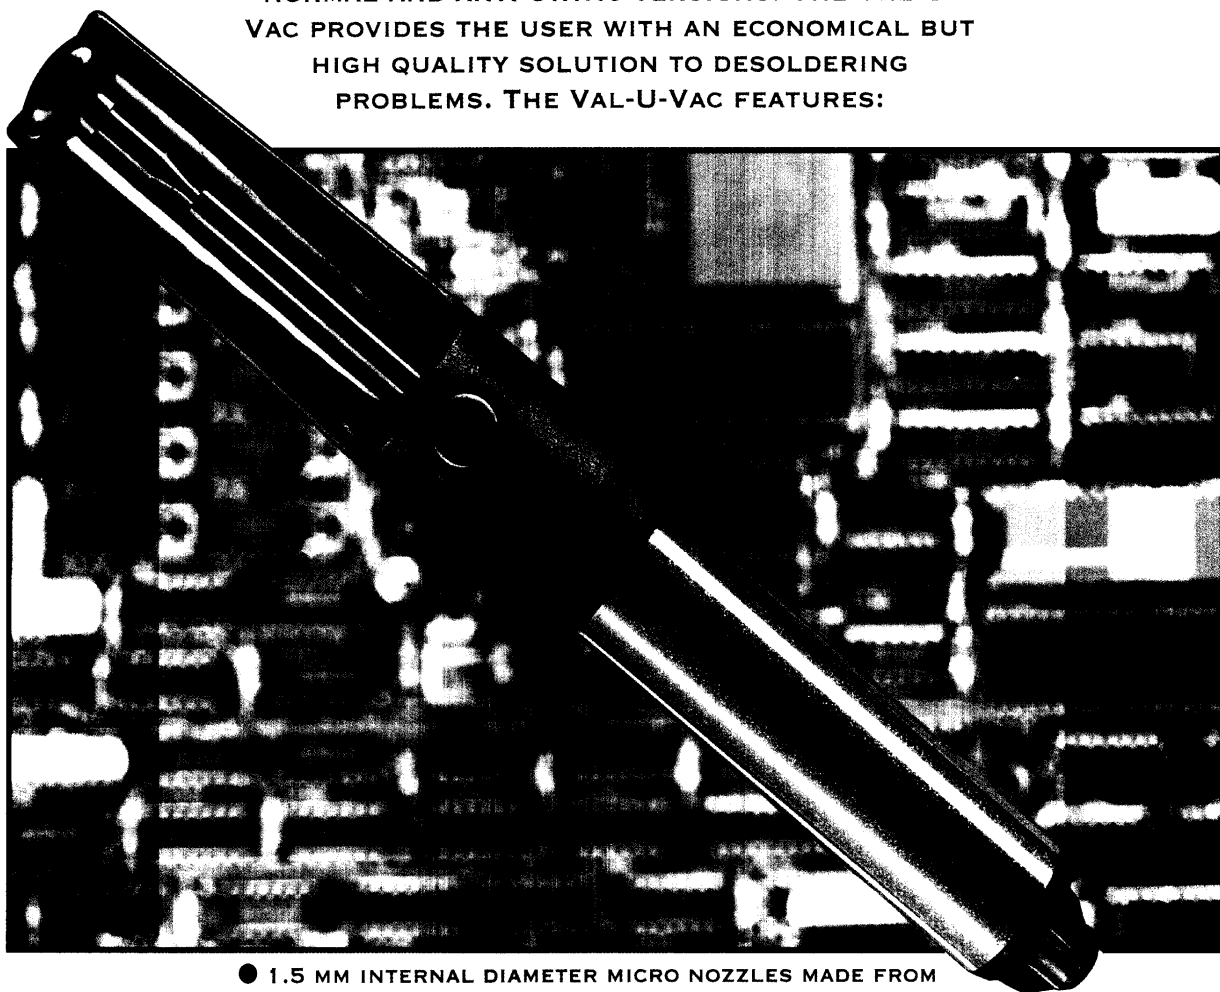

- 1.5 MM INTERNAL DIAMETER MICRO NOZZLES MADE FROM PTFE FOR LONGER LIFE AND NON-STICK DESOLDERING.
- QUICK-FIT 1/4 TURN BAYONET NOZZLE ASSEMBLIES FOR QUICK AND SIMPLE REPLACEMENT.
- QUICK-RELEASE BETWEEN TOOL BODY AND BUTTON HOUSING PROVIDING GOOD ACCESSIBILITY FOR EASY CLEANING.
- MINIMUM RECOIL ON RELEASING THE BUTTON TO PREVENT DAMAGE TO SENSITIVE BOARDS.
- RECESSED RELEASE BUTTON TO PREVENT ACCIDENTAL OPERATION.
- INCORPORATED SAFETY SHIELD TO PREVENT THE POSSIBILITY OF ACCIDENT DURING USE.
- SMOOTH, ROUNDED PLUNGER BUTTON AND LIGHTWEIGHT ERGONOMIC DESIGN FOR FATIGUE FREE OPERATION.
- ANTI-STATIC VAL-U-VAC HAS BEEN INDEPENDENTLY TESTED AND FULLY COMPLIES WITH THE LATEST EUROPEAN STANDARD CECC 15 CONCERNING THE SAFEGUARDING OF STATIC SENSITIVE COMPONENTS.