
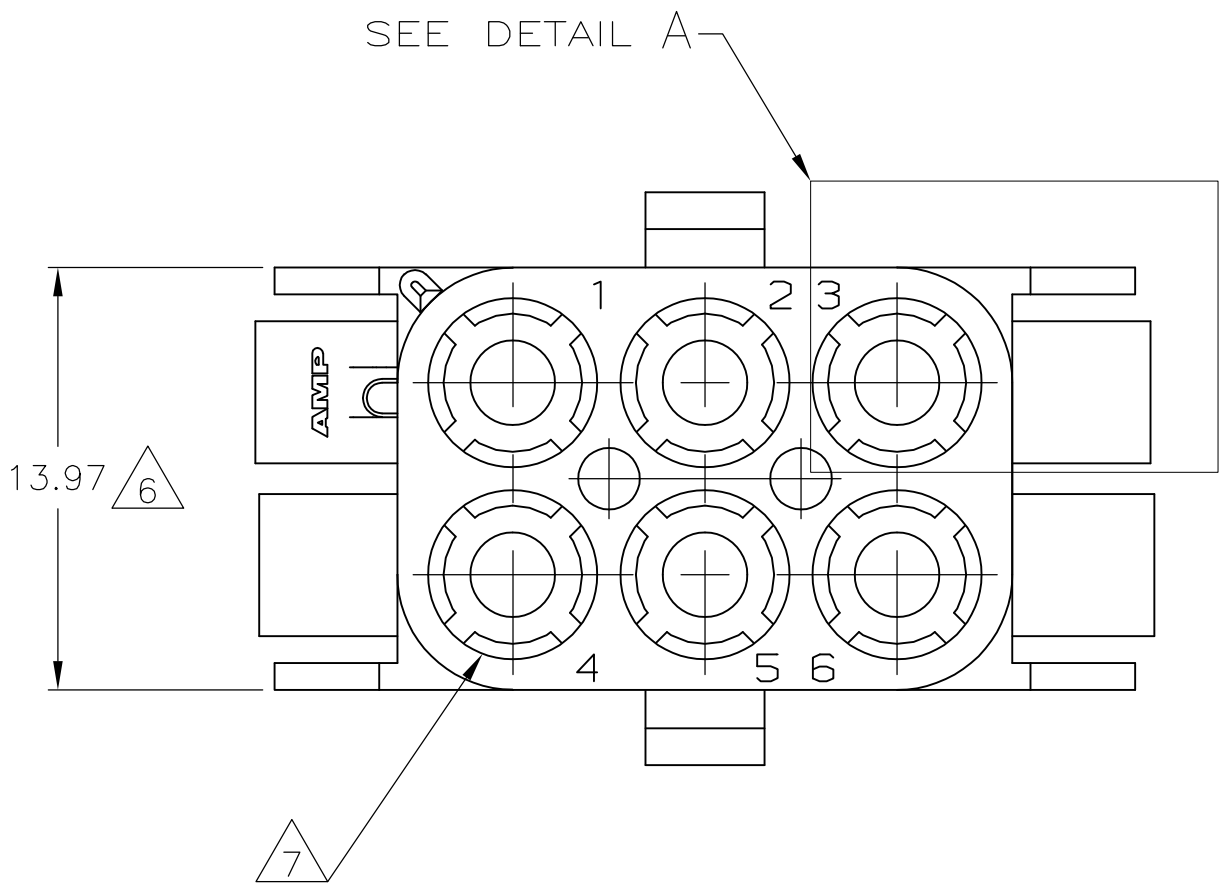
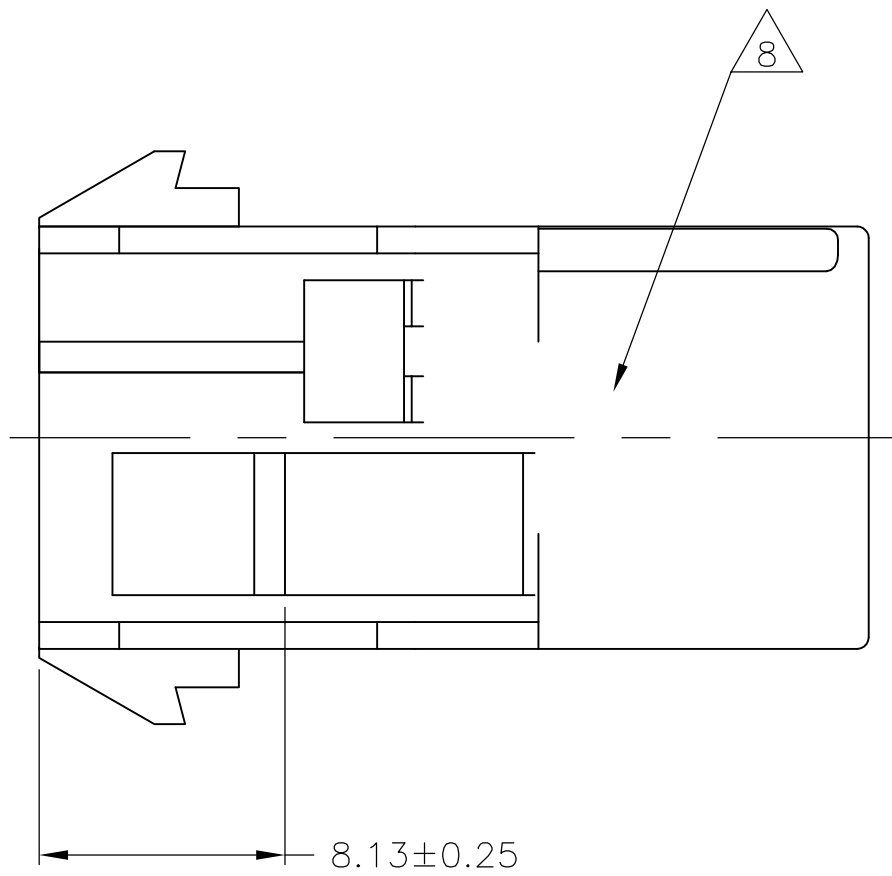



LOC	DIST	REVISIONS				
		REV	DATE	BY	CHK	APP
CM	00	AP3	REVISED PER ECR-11-020221	10OCT11	KH	TM

D


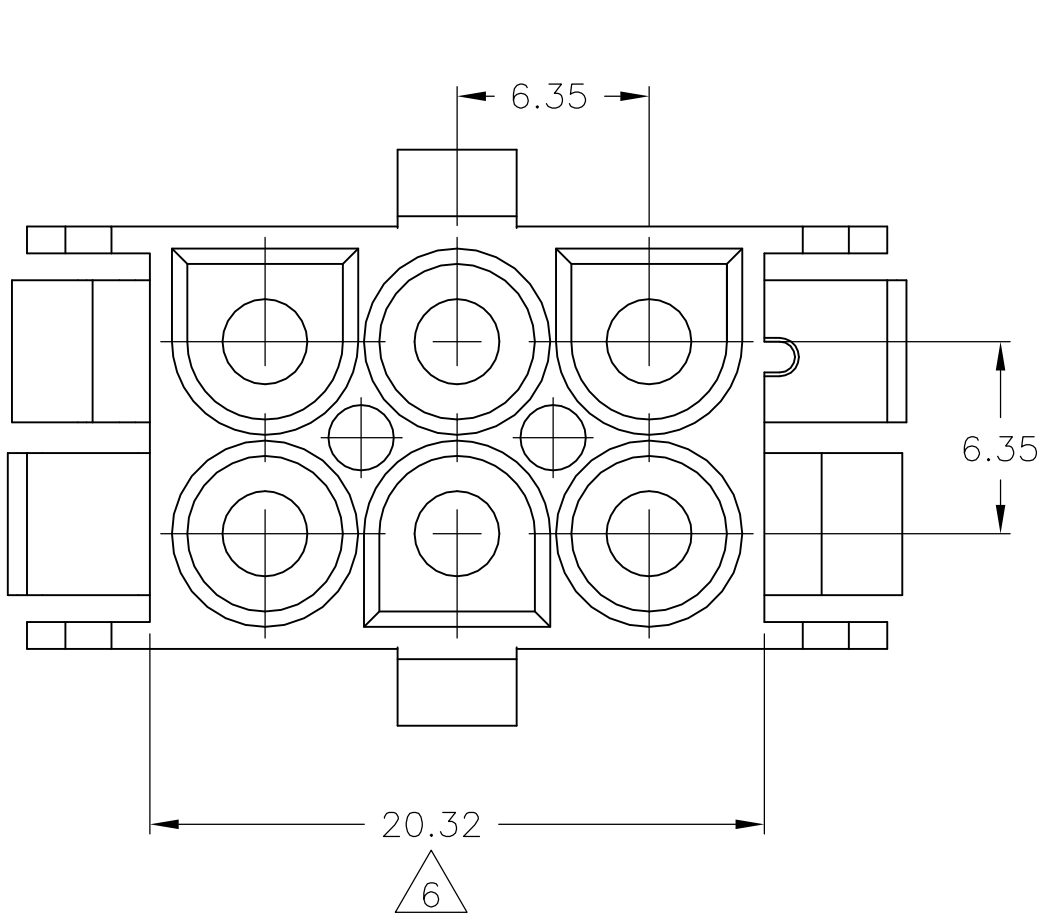


- 1 MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- 2 RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
- 3 PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 4 OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5 CIRCUIT NUMBER 1 LOCATION.
- 6 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- 7 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 8 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

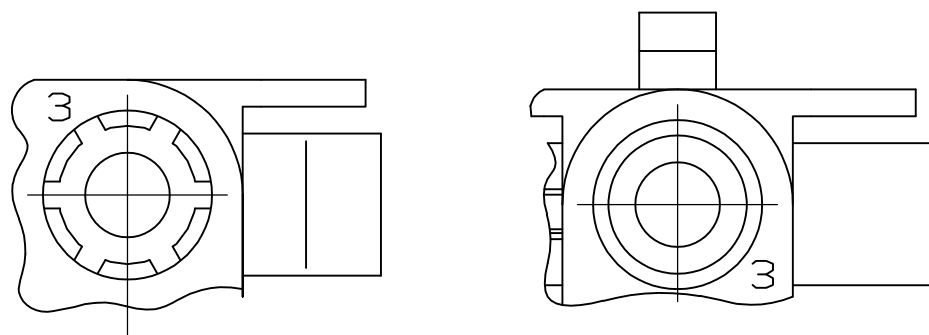


DETAIL A
OPTIONAL CONSTRUCTIONS

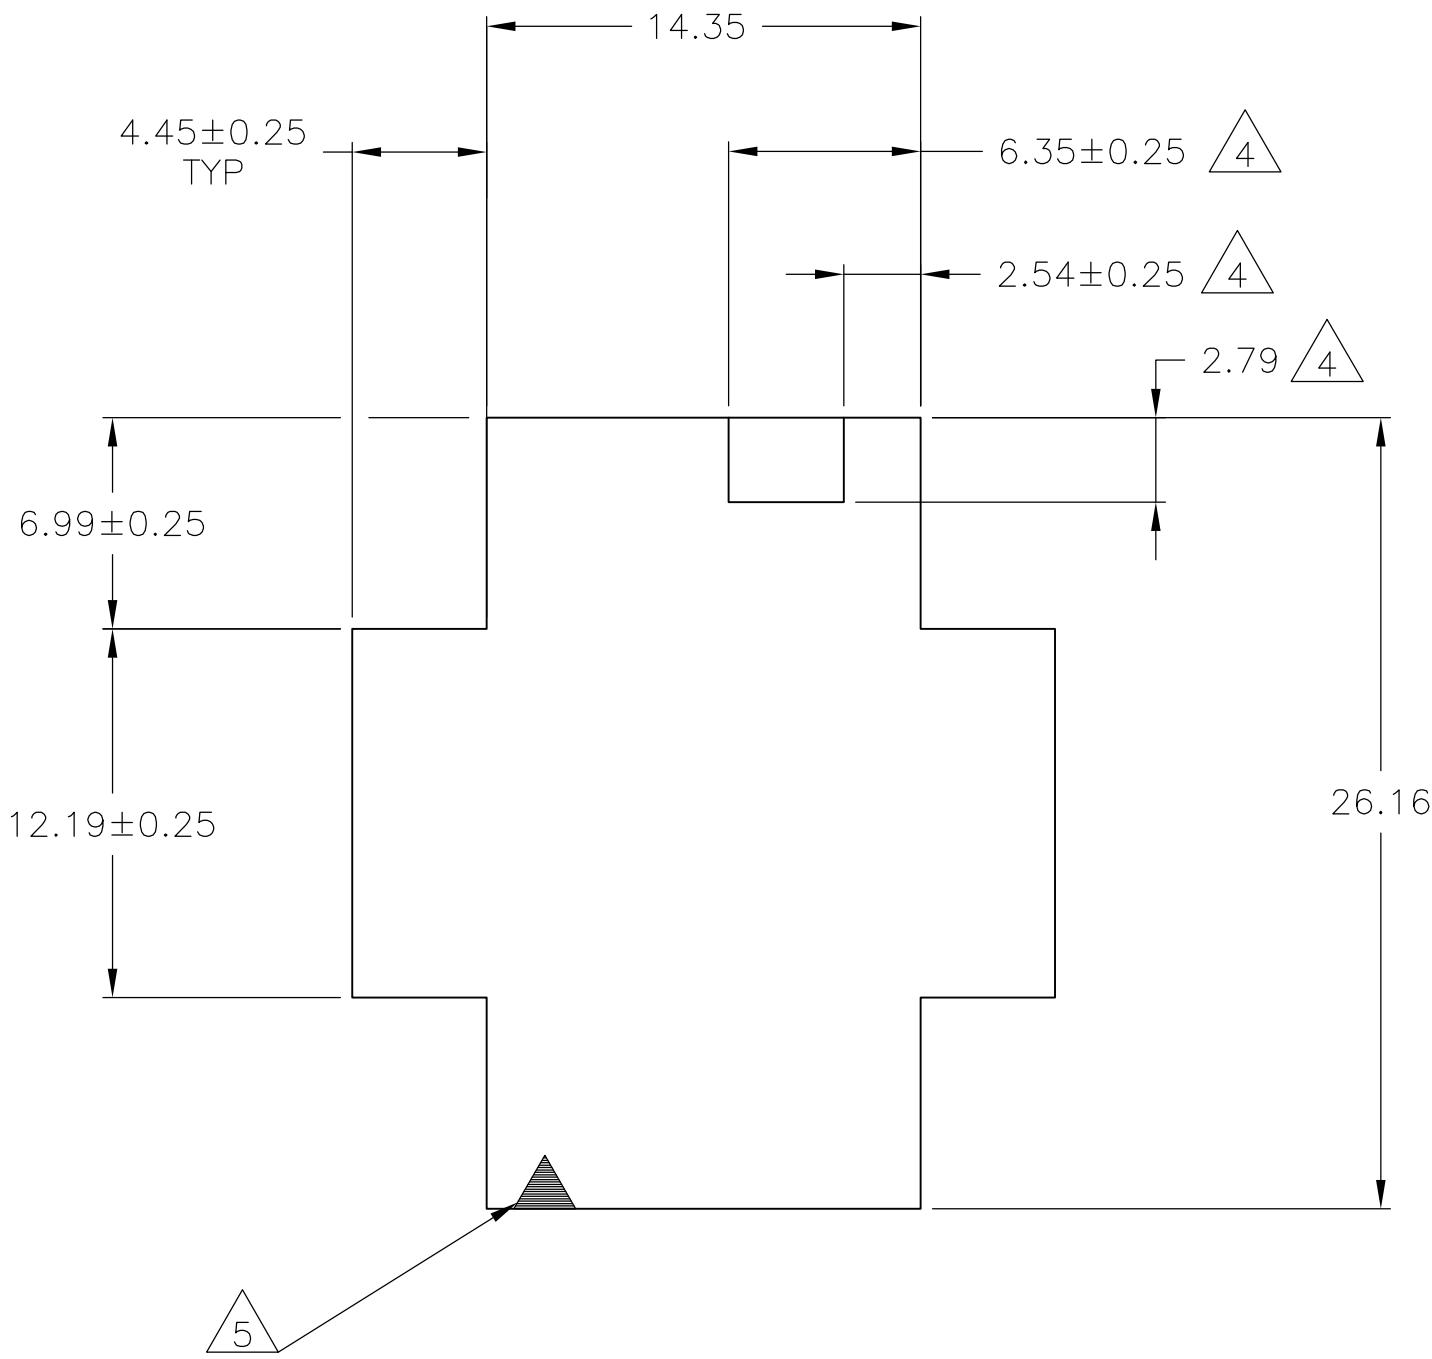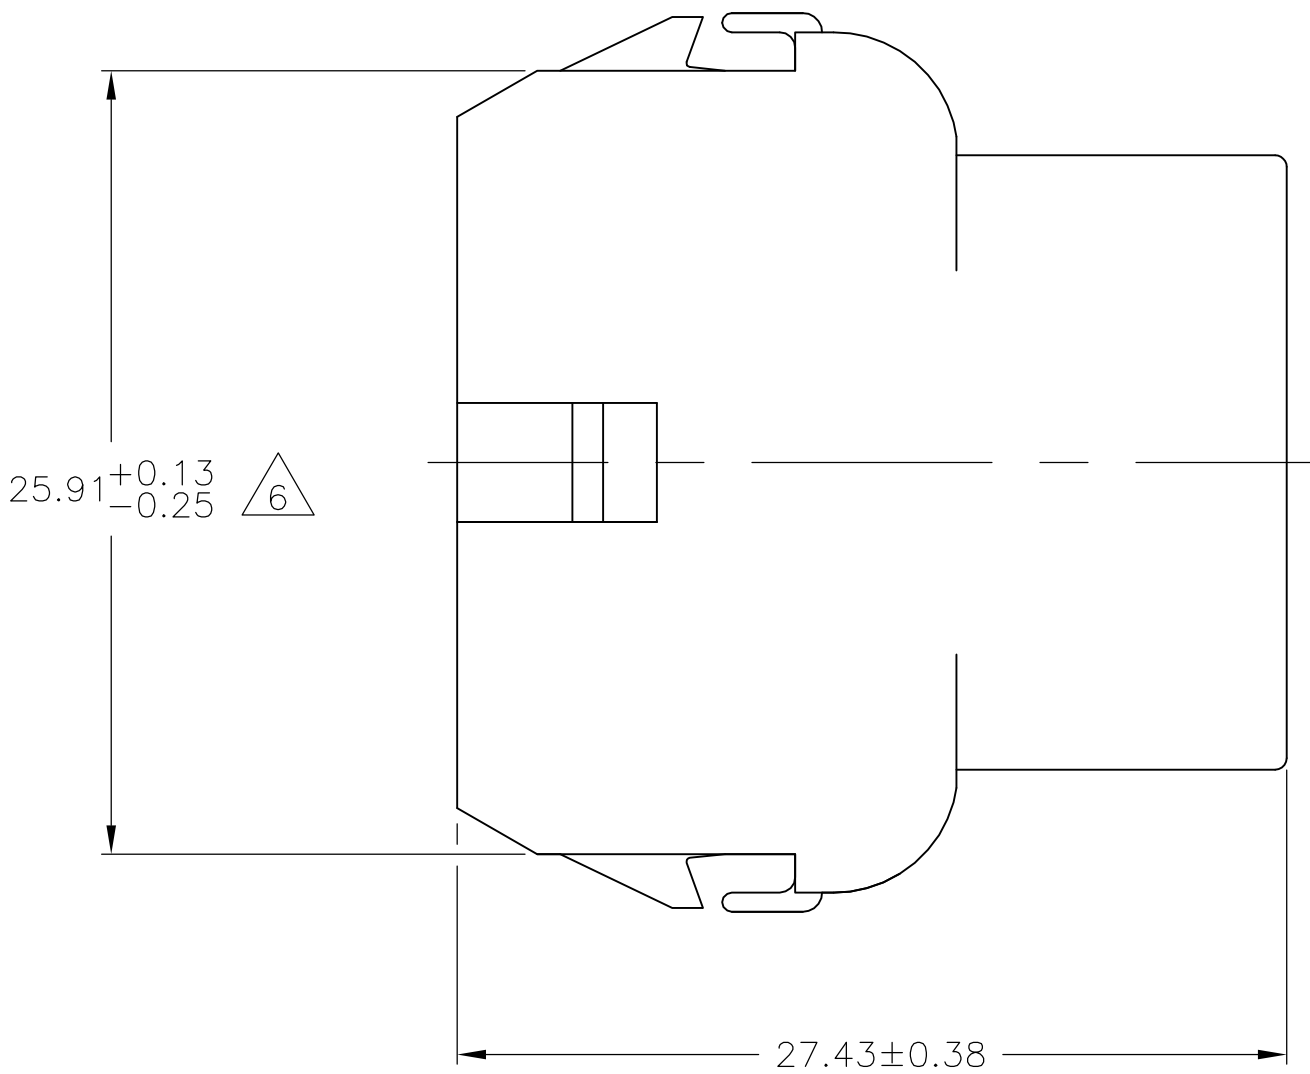


RECOMMENDED PANEL CUT OUT

B

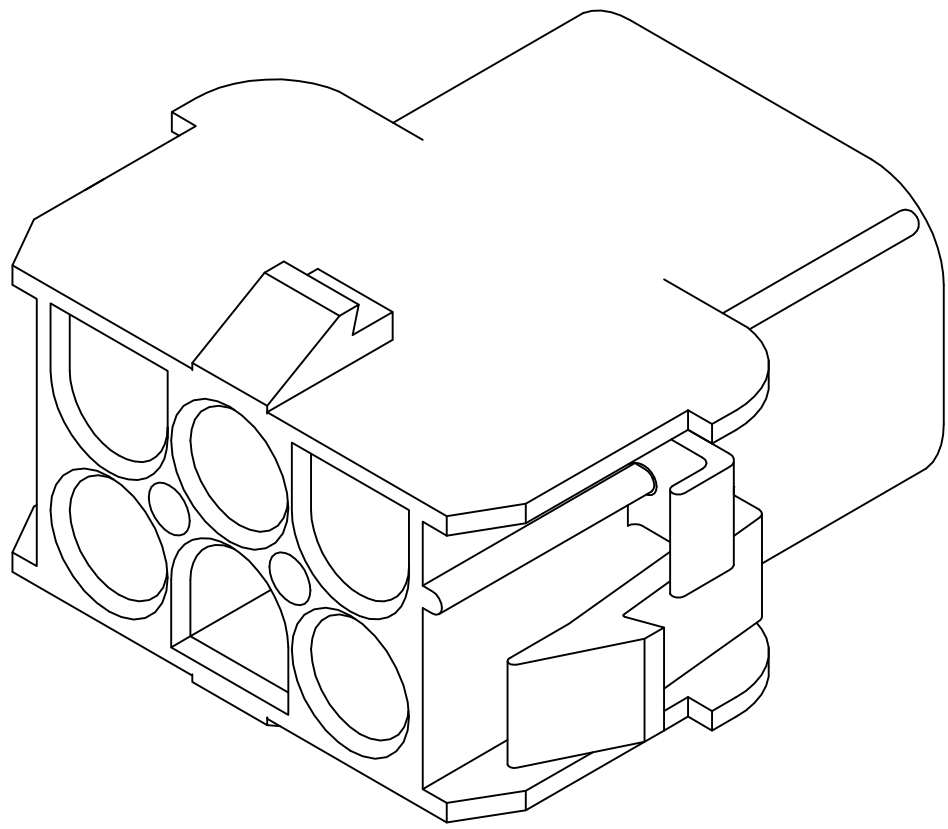

3-DIMENSIONAL MODEL
NTS

6.35	.250	27.43	1.080
4.45	.175	26.16	1.030
2.79	.110	25.91	1.020
2.54	.100	20.32	.800
2.29	.090	14.35	.565
0.76	.030	13.97	.550
0.38	.015	12.19	.480
0.25	.010	8.13	.320
0.13	.005	6.99	.275
MM	IN	MM	IN
CONVERSION TABLE			








9 OBSOLETE	BLACK	1-480705-9
	GREY	1-480705-8
	BLUE	1-480705-6
	GREEN	1-480705-5
	YELLOW	1-480705-4
9 OBSOLETE	ORANGE	1-480705-3
	RED	1-480705-2
	BROWN	1-480705-1
	NATURAL	1-480705-0
	COLOR	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 28JUL04	TE Connectivity	
DIMENSIONS: mm		CHK S. RIDGILL 28JUL04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 28JUL04	CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™	
0.13		PRODUCT SPEC	RESTRICTED TO	
1.27		APPLICATION SPEC	SIZE	
2.54		WEIGHT	CAGE CODE	
5.08		—	DRAWING NO	
12.7		—	480705	
25.4		—	CUSTOMER DRAWING	
50.8		—	SCALE	
101.6		—	4:1	
203.2		—	SHEET	
406.4		—	1 OF 2	
812.8		—	REV	
1625.6		—	AP3	

LOC		DIST		REVISIONS				
P	T	LTR	DESCRIPTION	DATE	DWN	APVD		
CM			00				-	SEE SHEET 1
			-				-	-

- 1
- STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE); CLARIFICATION MARKS UNDER THE 6 & 9.
- 2
- CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
- 3
- VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

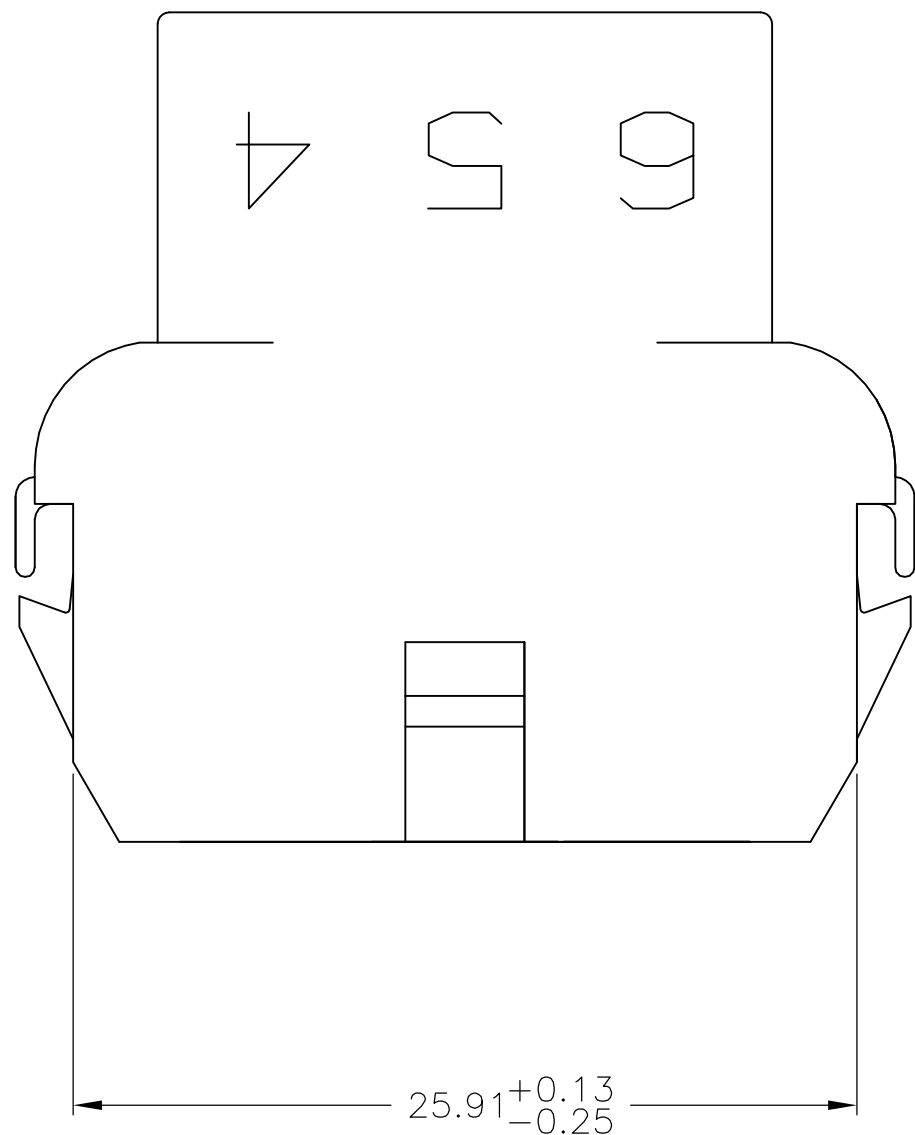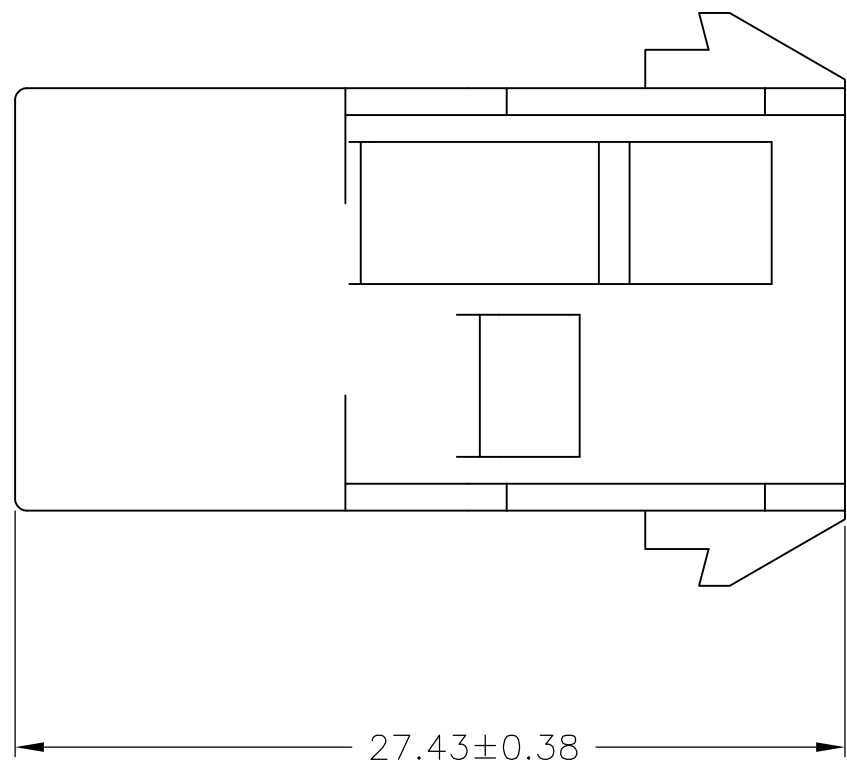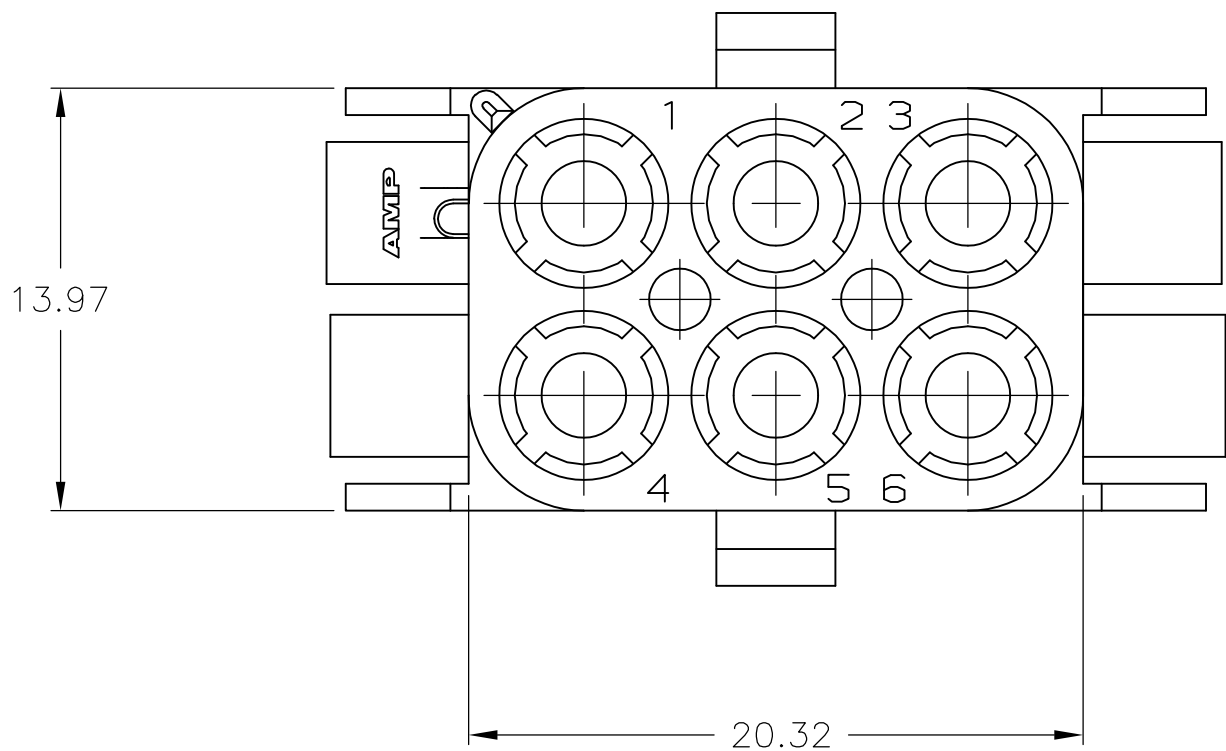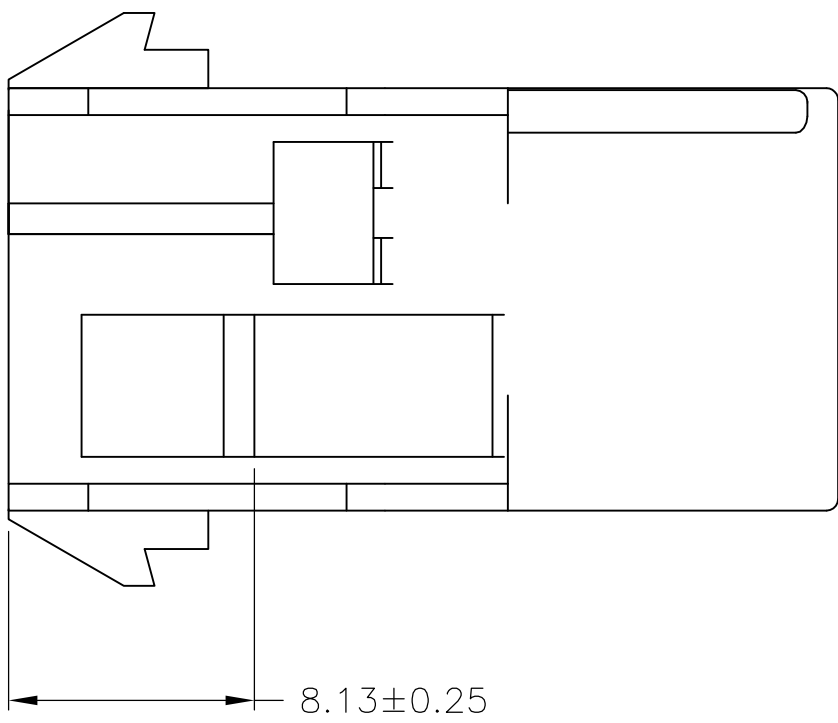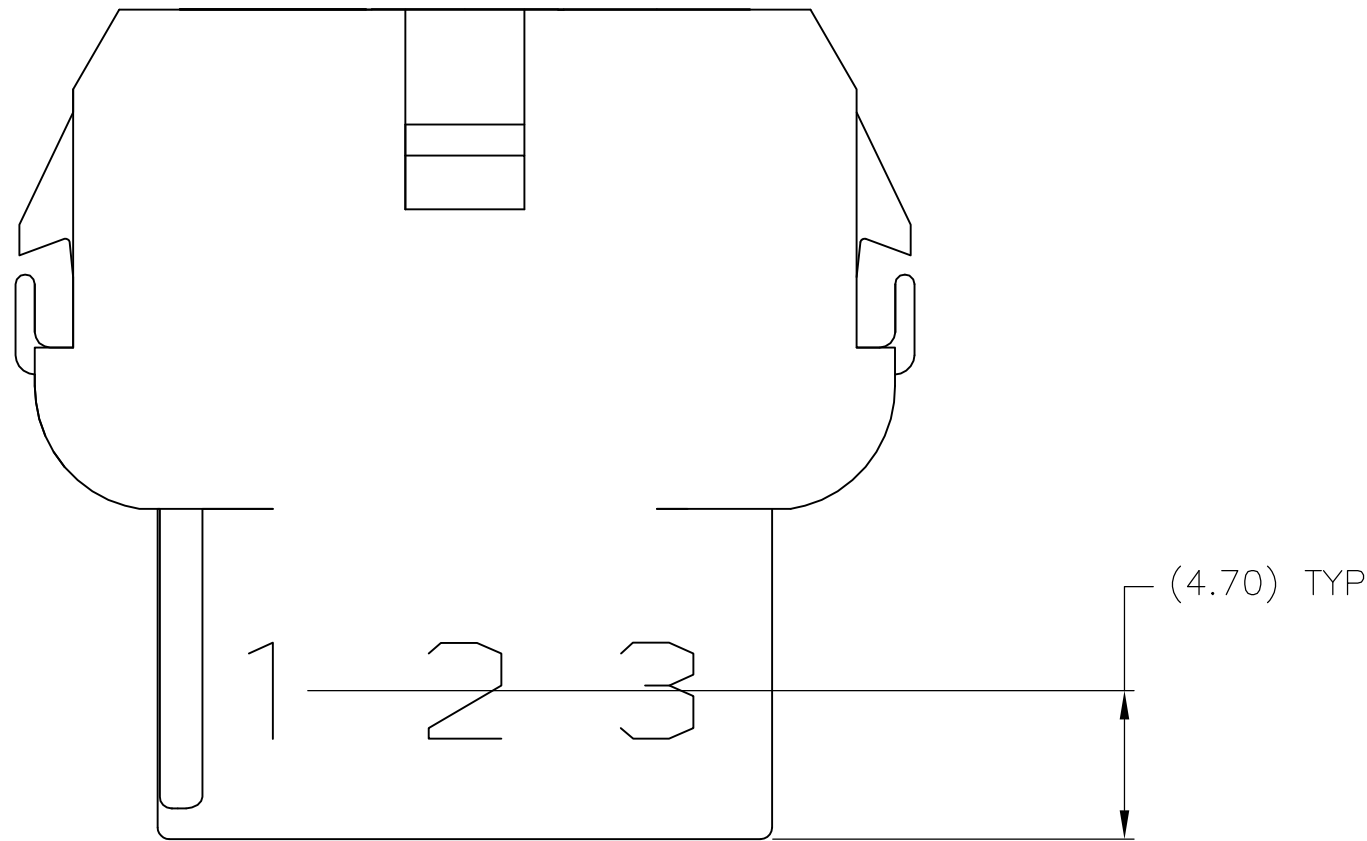

5.08	.200	-	-
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.32	.800
0.25	.010	13.97	.550
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	28JUL04	NATURAL		2-480705-0
		CHK S. RIDGILL	28JUL04	COLOR		PART NO.
		APVD S. RIDGILL	28JUL04	TE Connectivity		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
mm		0.127		CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™		
		0.13		SIZE		
		0.13		CAGE CODE		
		0.13		DRAWING NO		
		0.13		RESTRICTED TO		
		0.13		A100779		
		0.13		C=480705		
		0.13		CUSTOMER DRAWING		
		0.13		SCALE 4:1		
		0.13		SHEET 2 OF 2		
		0.13		REV AP3		