
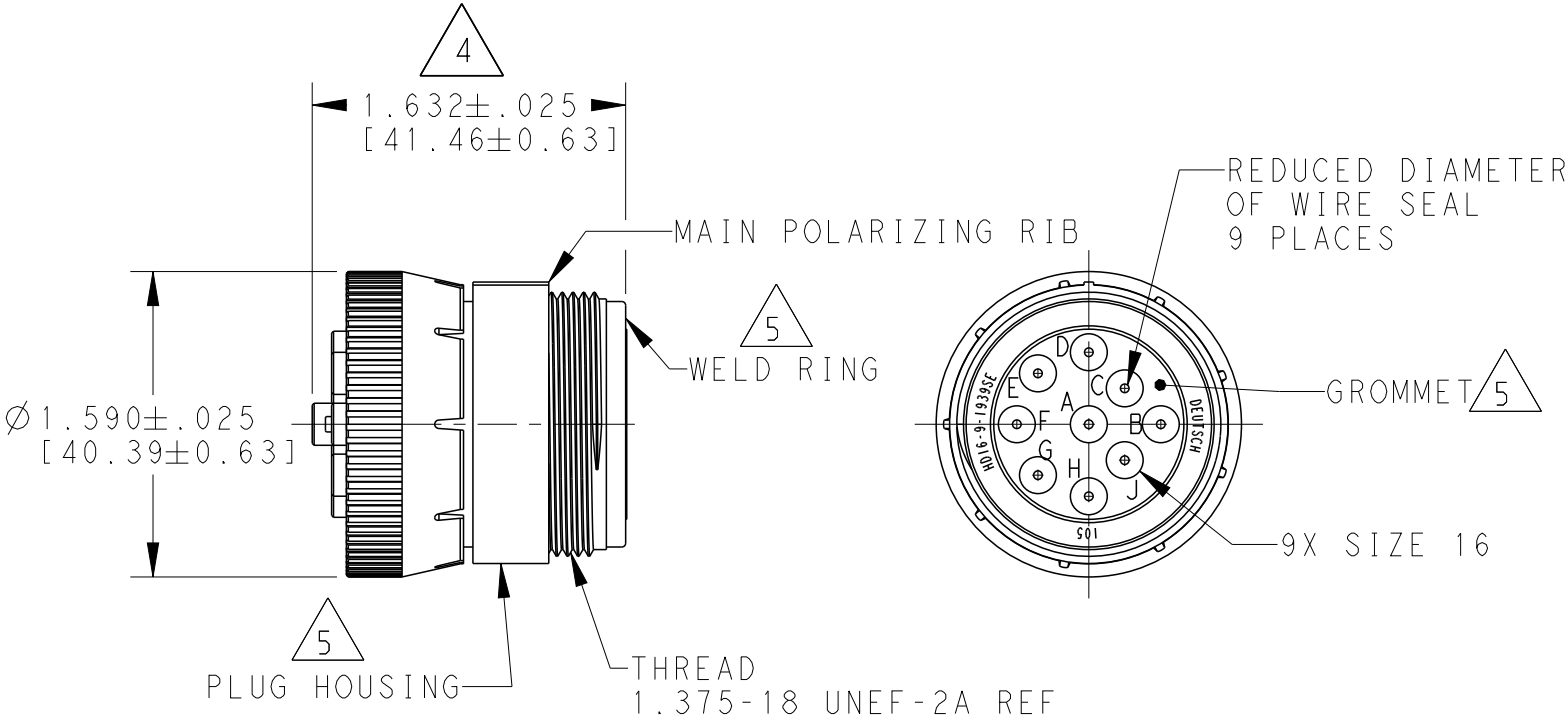



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		B	REVISED PER E.O. P16453	17DEC1999	-	RDR
			C	REVISED PER E.O. P17740	26APR2002	-	RDR
			D	REVISED PER E.O. P21133	29SEP2011	-	RDR
			D1	REVISED PER ECO-14-002953	29JAN2014	PV	DM

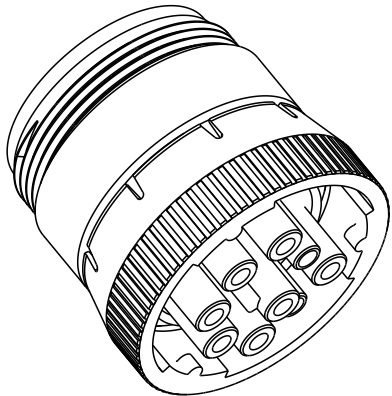

5. MATERIAL:
PLUG HOUSING AND WELD RING: PA 15%GF (BLACK)
GROMMET: SILICONE (RED)
4. OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.
3. THIS PLUG MATES WITH FOLLOWING RECEPTACLES (X = SEAL TYPE, XXXX = ALL MODIFICATIONS).
HD10-9-1939PX-XXXX
HD14-9-1939PX-XXXX
2. SEE DRAWING 0425-015-0000 FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS.
1. SEE TABLE FOR USABLE WIRE RANGE AND INSULATION RANGE

CONTACT SIZE	MINIMUM O.D.	MAXIMUM O.D.	WIRE RANGE [mm ²] 2
16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.0-.50]

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. NORRIS 11SEP1996	TE Connectivity		
DIMENSIONS: INCHES [mm]		CHK I. GRANTCHAROVA 18SEP2013			
		APVD D. MEYER 19SEP2013	NAME PLUG CONNECTOR HD10 SERIES ARR. 9-1939 E SEAL COLOR: BLACK		
		PRODUCT SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC -	A300779C-HD16-9-1939SE		
MATERIAL 5		WEIGHT 37.50 (g)	Customer Drawing		
		FINISH -	SCALE 1:1 SHEET 1 OF 1 REV D1		