

LE1 LENSES FOR LEDENGIN 5W LEDs

LedEngin, Inc.



- Specially designed for LedEngin 5W series of LEDs.
- Special care taken to make a uniform white or warm white illumination..
- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F). Allows use of high current and temperature conditions
- Holder material ABS (90°C/194°F)
- Best available optical efficiency, more than 90%, with an extremely good cutoff of light
- Fastening of holder to PCB with appropriate adhesive, e.c. epoxy or polyurethane based. NOTE: DO NOT USE SUPERGLUE.
- Please check fastening details from this link:
(http://www.ledil.com/datasheets/DataSheet_GLUES.pdf)

LENS TYPES

NAME	ORDERING CODE	FWHM Angle
LE1 REAL SPOT	FA10784_LE1-RS	±4°
LE1 DIFFUSER	FA10786_LE1-D	±5°
LE1 MEDIUM	FA10783_LE1-M	±12°
LE1 MEDIUM2	FA11454_LE1-M2	Coming soon
LE1 OVAL	FA11103_LE1-O-90	Coming soon
LE1 RECTANGULAR	FA10785_LE1-REC	±19° x 12°

NOTE: DELIVERED UNASSEMBLED

© Ledil Oy – PRELIMINARY - Subject to change without prior notice


Ledil Oy
Tehdaskatu 13
FIN-24100 SALO, Finland

www.ledil.com
email: ledil@ledil.com
FAX: +358-2-733 8001


2010-08-02

MEASUREMENT DATA

Relative Intensity of LE1-RS

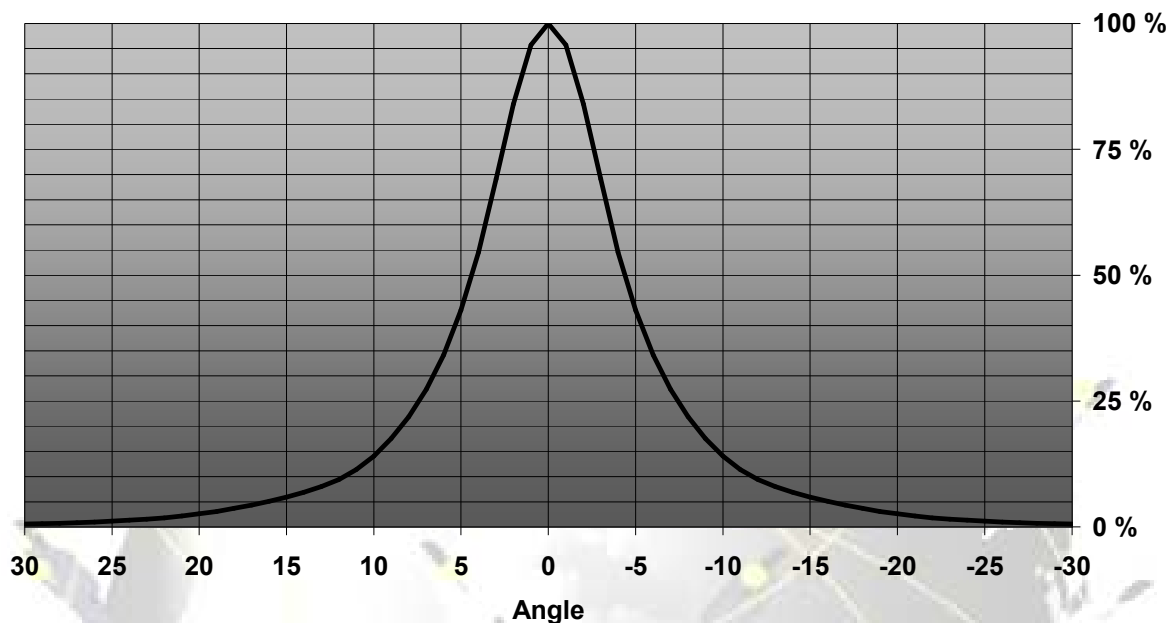


Relative Intensity of LE1-SS

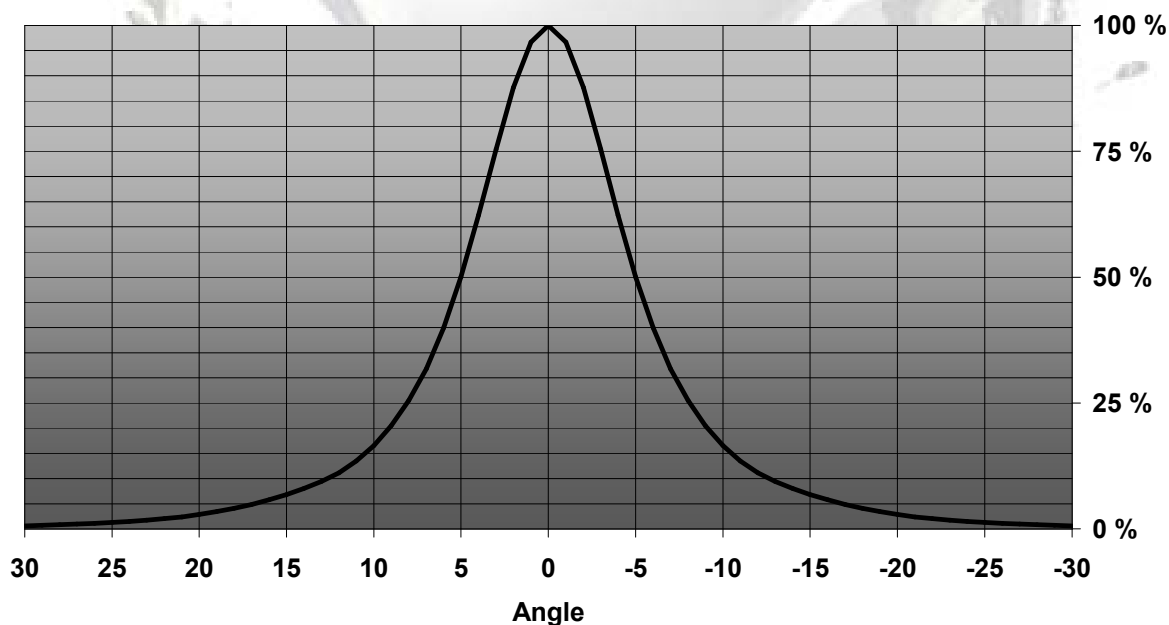


© Ledil Oy – PRELIMINARY - Subject to change without prior notice


Relative Intensity of LE1-M

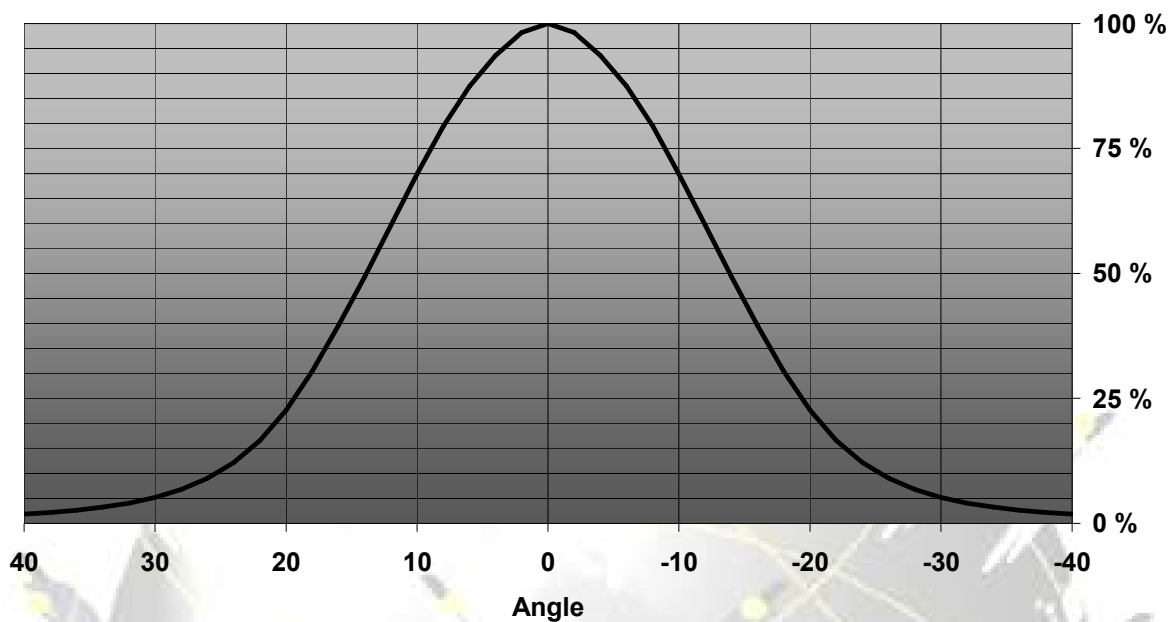

Relative Intensity of LE1-REC(horizontal)

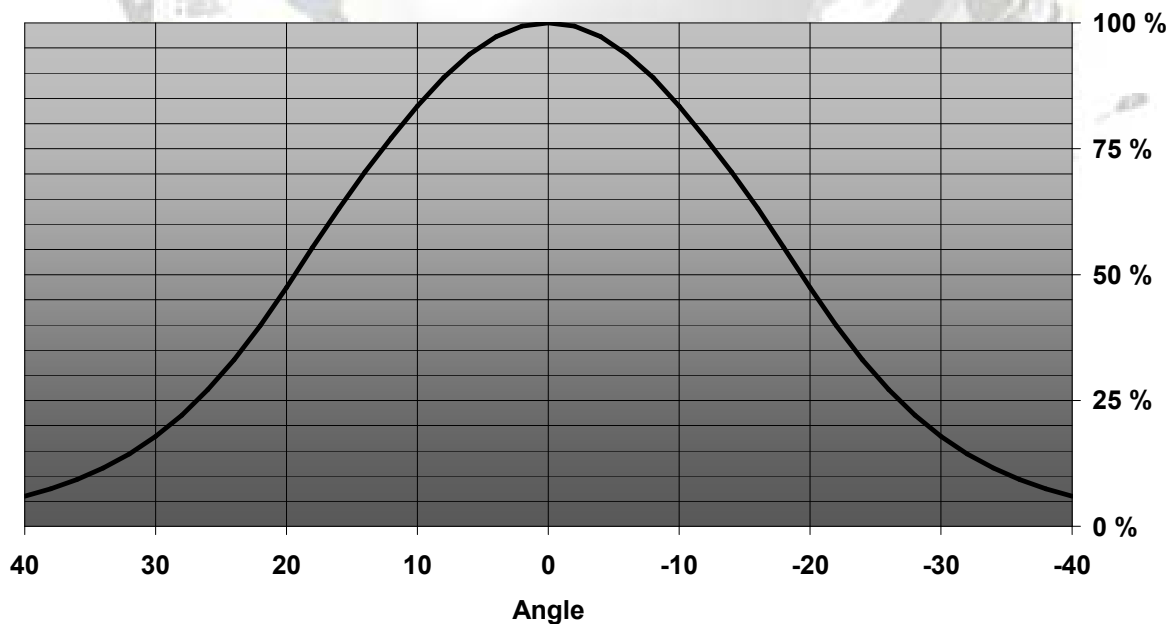


Relative Intensity of LE1-REC (vertical)

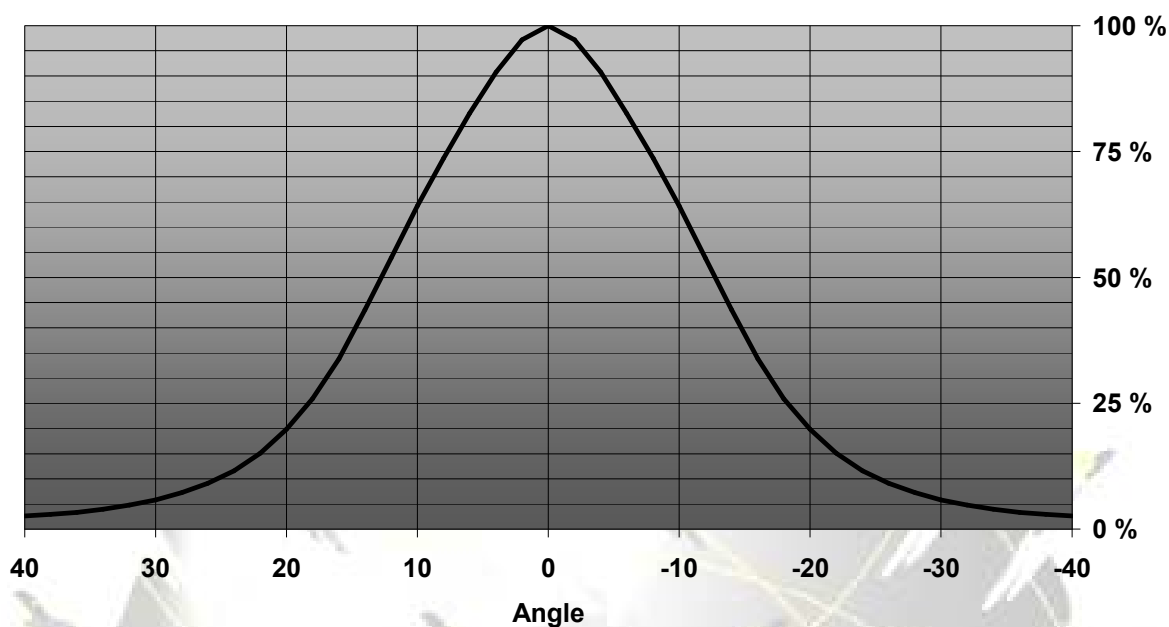

EULUMDAT & IES FILES AVAILABLE BY REQUEST

DRAWINGS

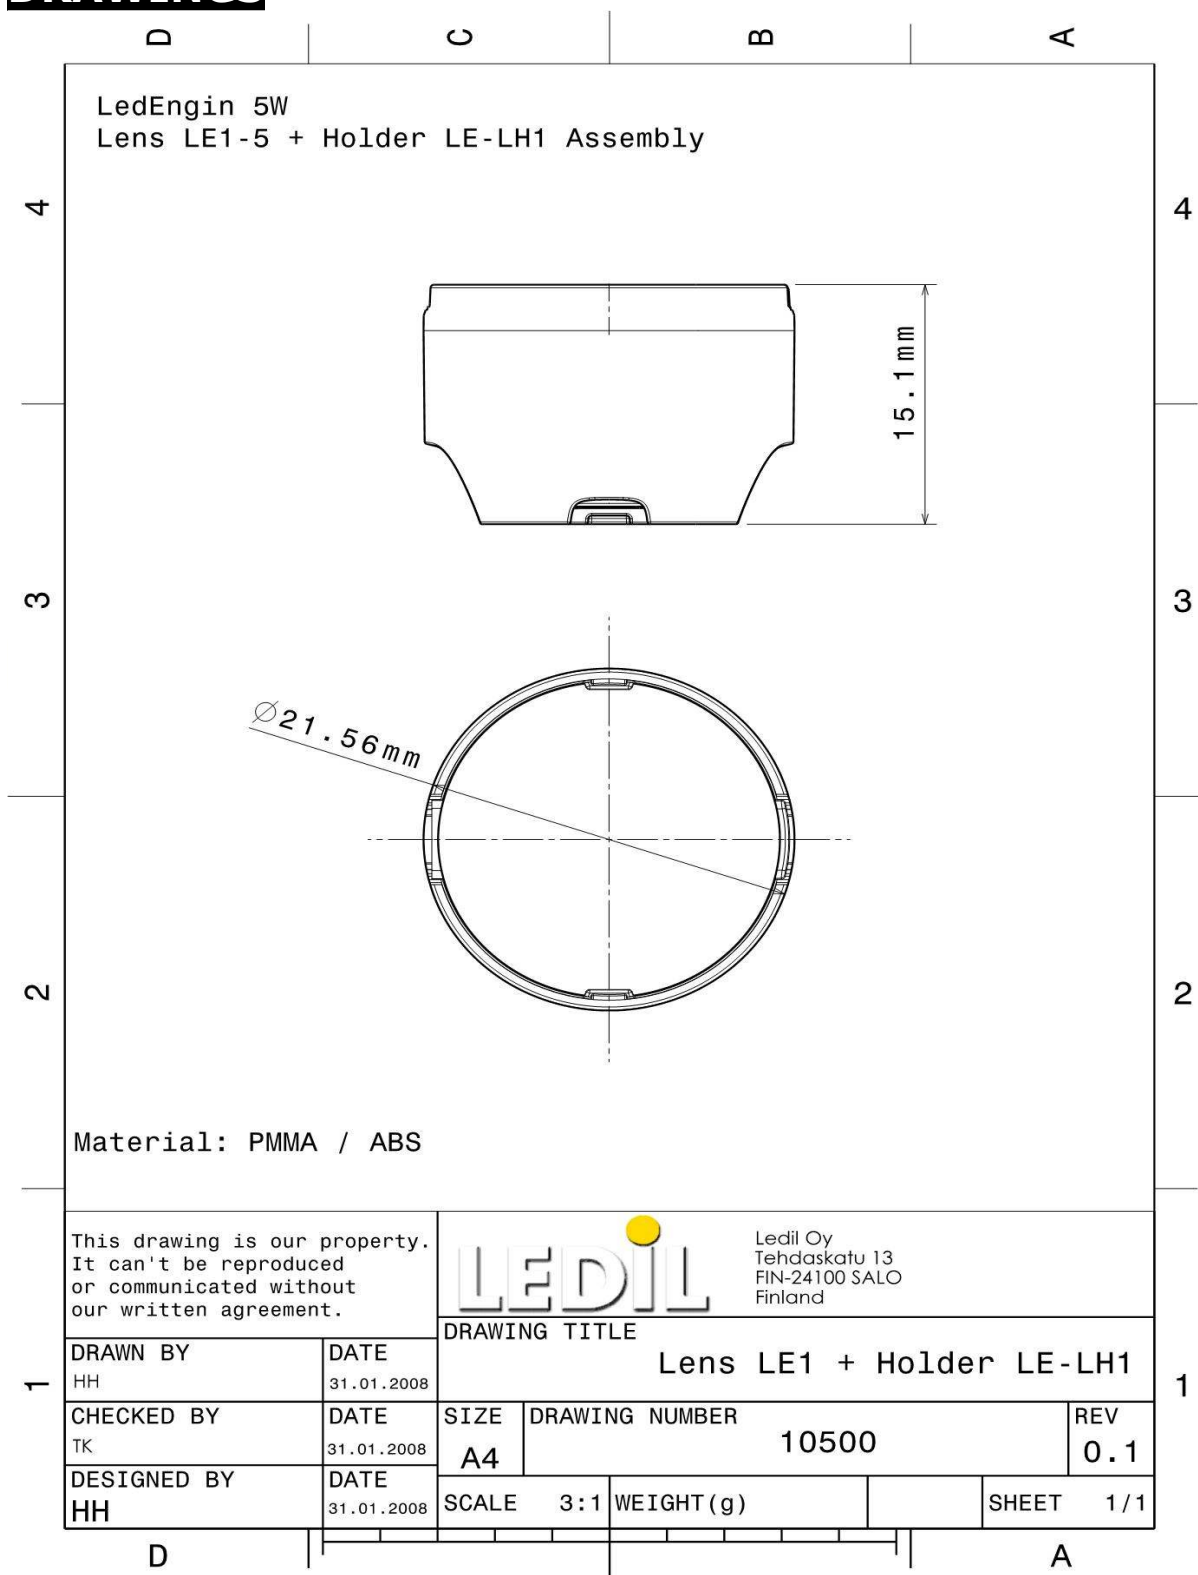

© Ledil Oy – PRELIMINARY - Subject to change without prior notice