THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/1/10	D.GRIFFIN
B	ECN 6271: UPDATED HOODS TO NEW LOGO	7/10/12	D. DESJARDIN

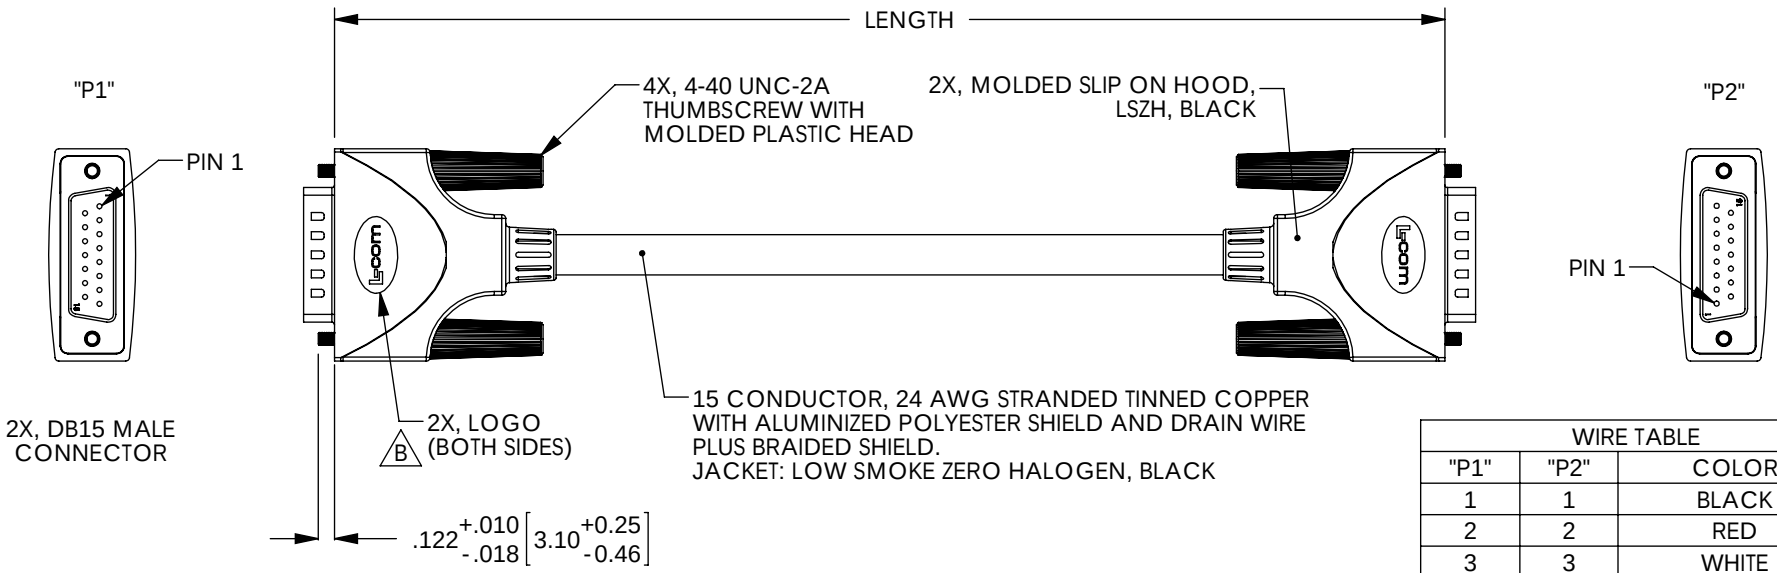

MODEL NUMBER	LENGTH FT [METERS]
CSMUZ15MM-1	1.0 [.31]
CSMUZ15MM-2.5	2.5 [.76]
CSMUZ15MM-5	5.0 [1.52]
CSMUZ15MM-10	10.0 [3.05]
CSMUZ15MM-15	15.0 [4.57]
CSMUZ15MM-25	25.0 [7.62]
CSMUZ15MM-50	50.0 [15.24]
CSMUZ15MM-125	125.0 [38.10]

WIRE TABLE		
"P1"	"P2"	COLOR
1	1	BLACK
2	2	RED
3	3	WHITE
4	4	GREEN
5	5	ORANGE
6	6	BLUE
7	7	WHITE/BLACK
8	8	RED/BLACK
9	9	GREEN/BLACK
10	10	ORANGE/BLACK
11	11	BLUE/BLACK
12	12	BLACK/WHITE
13	13	RED/WHITE
14	14	GREEN/WHITE
15	15	BLUE/WHITE
SHELL	SHELL	DRAIN

RoHS Compliant

NOTES:

1. DRAIN WIRE TIED TO CONNECTOR SHELLS.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC. PS-0031.
4. DUST COVERS INSTALLED FOR SHIPPING. (NOT SHOWN)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
012 [305] = +1 [25] / -0
>12 [305] 060 [1524] = +2 [51] / -0
>60 [1524] 0120 [3048] = +4 [102] / -0
>120 [3048] 0300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = Ñ .2
.XX = Ñ .02
.XXX = Ñ.005

PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	4/7/10
CHECKED BY F.MAO	4/7/10
APPROVED BY S.SMITH	4/7/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: DATA CABLING

PRODUCT DESCRIPTION: LOW SMOKE ZERO HALOGEN DATA CABLE

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CSMUZ15MM	B

SCALE: NONE | CAD FILE: CSMUZ15MM.SLDDRW | SHEET 1 OF 1