

REVISIONS

A	CO-94413	JJA	8 OCT 99
B	CO-195303	CSL	15 NOV 99
C	202714	CSL	3 APR 01

CHECK

BRJ

CHECK

64

22 SEP 64

LSD

CHECK

64

18 SEP 64

H.B.W.

DRAWN

FO-80378 003

RASTER

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

FO-80378 003

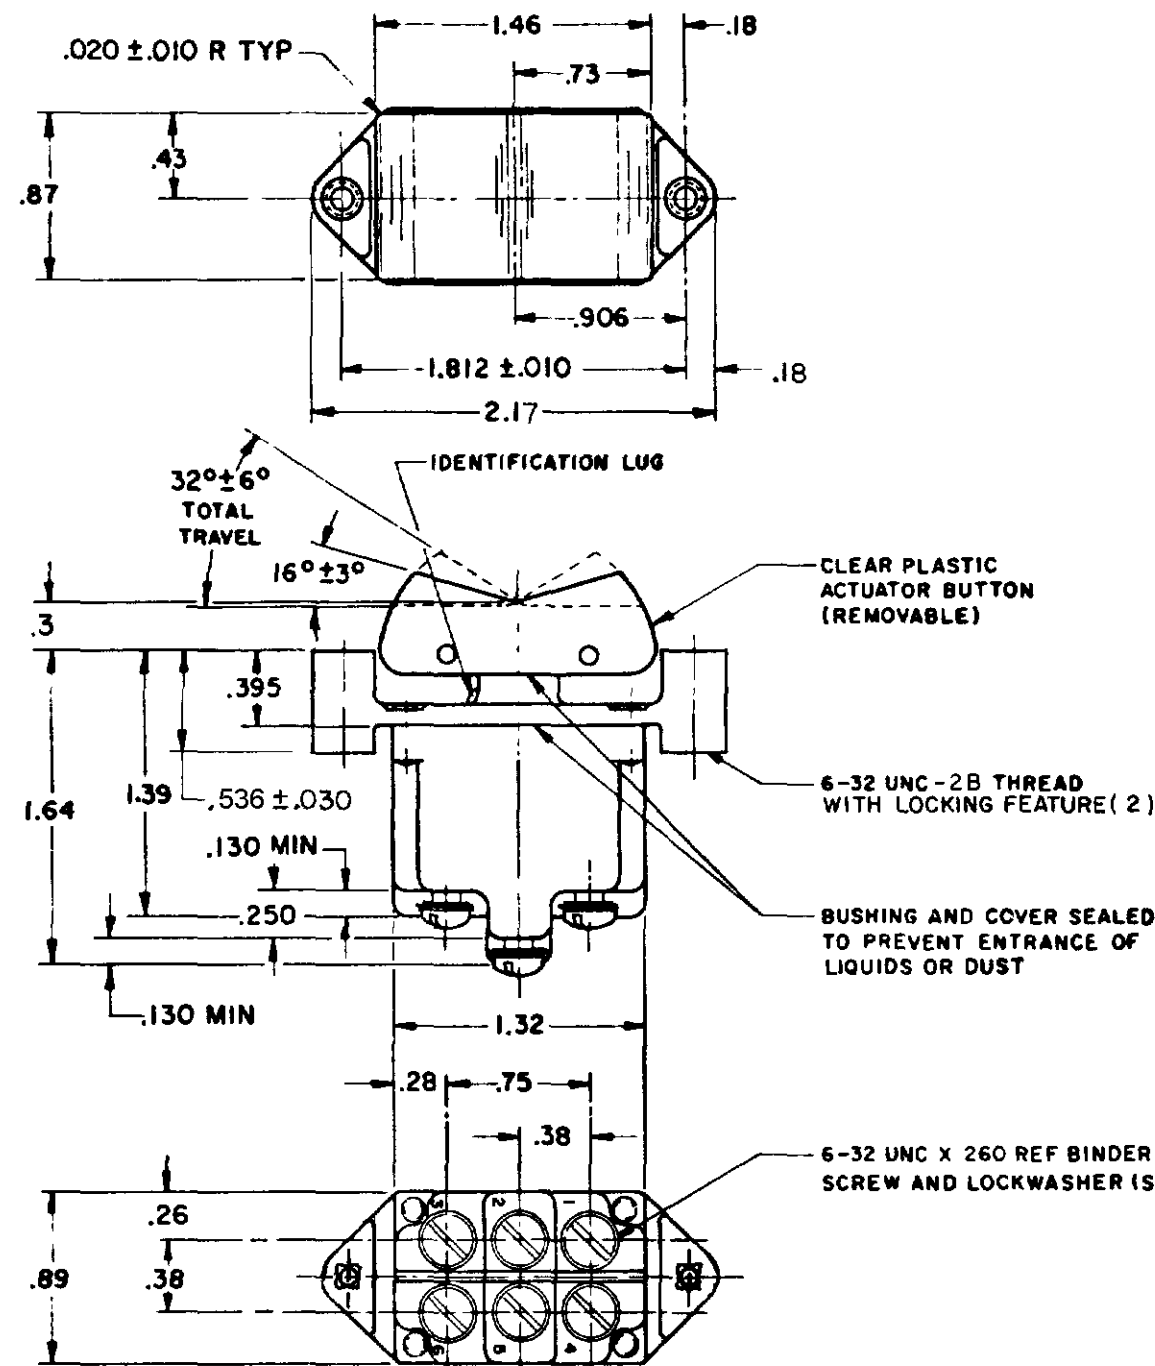
FO-80378 003

FO-80378 003

MICRO SWITCH

A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR CO. INCORPORATED
MINNEAPOLIS, MINN.

FED. MFR CODE 91929

SWITCH-TOGGLE
FLUSH KEYCATALOG LISTING
2TP12 SERIES
CHART 1

CAT. LIST.

CIRCUIT MADE WITH
BUTTON DEPRESSED ON

OPPOSITE LUG (2-3, 5-6) CENTER (1-2, 4-5) LUG SIDE (1-2, 4-5)

2TP12-1	ON	OFF	ON
2TP12-2	ON	NONE	OFF
2TP12-3	ON	NONE	ON
2TP12-21	ON	OFF	NONE
2TP12-4	ON	NONE	MOM OFF
②	ON	OFF	MOM ON
2TP12-6	OFF	NONE	MOM ON
2TP12-7	MOM ON	OFF	MOM ON
2TP12-8	ON	NONE	MOM ON
2TP12-61	NONE	OFF	MOM ON

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"L192 10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"

NOTES

1 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE
OF SWITCH

② APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

③ - THESE SWITCHES WILL WITHSTAND TEMPERATURE OF 160°F

④ SCREWS FURNISHED UNASSEMBLED

CHARACTERISTICS

ELECTRICAL DATA

SCALE - FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:ONE PLACE (0) ±.030
TWO PLACE (00) ±.015
THREE PLACE (000) ±.008
ANGLES ±

WEIGHT .14 LB EST