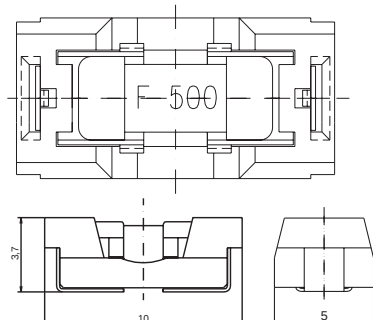



No. 424 / X-SMQ

This product is not recommended for new designs. Please refer to Littelfuse No. 154.

**Dimensions (mm)****Pad Layout****Limits for Pre-arcing Time**

Rated Current $2.0 \times I_N$ 

62mA ... 7.00A < 5s

UL 248-14, 125V, F**Holder with mounted fuse No. 419****Time-Current Characteristic**

Quick acting (F)

Standard

UL 248-14
CSA C22.2 No. 248.14

Approvals

cULus Recognized

Features

Easy exchange of the fuse
For line or low voltage applications
Low voltage drop
Internationally approved
High pulse resistance
For reflow soldering

WebLinks**Further info see:**

www.wickmanngroup.com

Further application info see Fuseology:

www.wickmann.com/download/fuseology.pdf

Specifications**Packaging**

010: Blister tape 38 cm reel (1500 pcs.)
tape width 16 mm

Materials of the Holder

Housing: Holder plastics UL94 V-0
Terminals: Copper alloy, Ni+Sn plated,
lead free

Operating Temperature

-55°C to +125°C (consider de-rating)

Climatic Category

-55°C/+125°C/21 days (IEC 60068-2-1...3)

Stock Conditions

+10°C to +60°C
relative humidity ≤ 75% yearly average,
without dew, maximum value for 30 days-95%

Vibration Resistance

24 cycles at 15 min. each (IEC 60068-2-6)
10 - 60Hz at 0.75mm amplitude
60 - 2000Hz at 10g acceleration

Solderability

235°C, 3 sec. (IEC 60068-2-58)

Soldering Heat Resistance

260°C, 10 sec. (IEC 60068-2-58)
280°C, 5 sec.

Minimum Cross Section, Copper

Conducting path - 0.1mm²
Thickness - 0.035mm

Mounting

Avoid circuit traces below the fuse

Marking on fuse

F, Current Rating

Unit Weight

0.4g (approx.)



Permissible continuous operating current is ≤ 70% at ambient temperature of 23°C (73.4°F).

Rated Current	Amp code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I _N  typ. (mV)	Power Dissipation 1.0 x I _N  typ. (mW)	Melting Integral 10 x I _N  min. (A ² s) typ.		Approbationen cULus
62mA	0062	125V	50A/125VAC/DC 50-60Hz cos φ = 1.0	1600	85	0.00014	0.000095	•
125mA	0125	125V		1300	120	0.00085	0.00067	•
250mA	0250	125V		950	150	0.0065	0.0052	•
500mA	0500	125V		360	200	0.093	0.074	•
750mA	0750	125V		350	300	0.25	0.20	•
1.00A	1100	125V		210	230	0.50	0.42	•
1.50A	1150	125V		250	500	1.10	0.95	•
2.00A	1200	125V		180	400	1.10	0.90	•
2.50A	1250	125V		220	550	1.20	0.95	•
3.00A	1300	125V		160	600	2.00	1.70	•
4.00A	1400	125V		140	670	4.30	3.42	•
5.00A	1500	125V		130	750	7.50	6.80	•
7.00A	1700	125V	35A/125VAC 100A / 125VDC 50-60Hz cos φ = 1.0	130	1200	13.60	11.60	•

*) Please note: The holder no. 424 is lead-free, but not the inserted fuse no. 419

Order Information

Qty.	Order-Number	Series	Amp Code	Packaging
		424		

Specifications are subject to change without notice

WebSite

www.wickmanngroup.com E-mail: sales@wickmann.com

Europe Tel: +49 2302 662-107

Americas Tel: +1 404 699-7820

E-mail: service@wickmannusa.com


Asia Tel: +852 26 14-1108

E-mail: sales@wickmann.com.hk

China Tel: +86 21 6432 5146

E-mail: sales@wickmann.com

No. 424 / X-SMQ

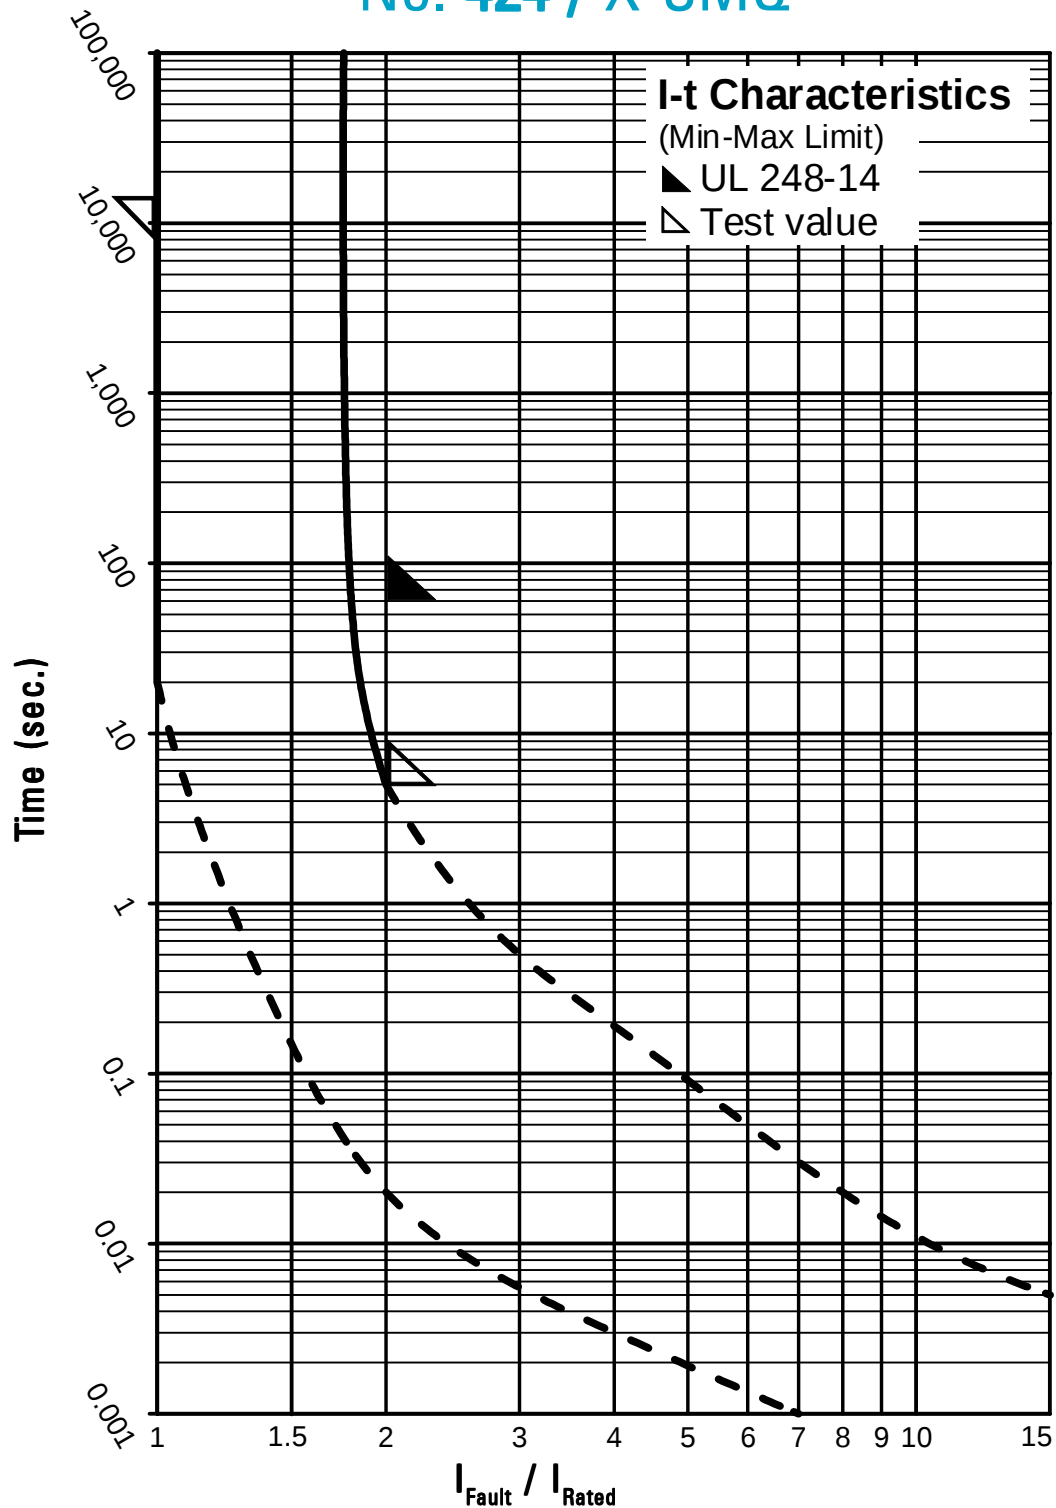

Contact WICKMANN for individual I-t curves