


174022-2 Product Details

Share Print Email

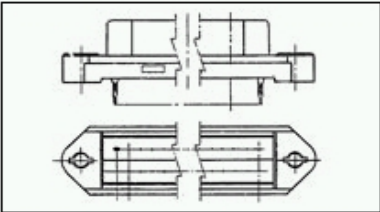

174022-2

2.16 [.085] PCB Connectors & Cable Assemblies

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Connector
- Connector Style = Receptacle
- 2.16 mm Centerline
- CHAMP Product Line
- 50 Positions

View all Features

Quick Links

- Check Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

TE Internal Number: 174022-2

Obsolete

Contact Product Information Center

Add to My Part List Request Sample Find Similar Products Buy Product

Documentation & Additional Information	
Product Drawings: - None Available Catalog Pages/Data Sheets: - None Available Product Specifications: - CHAMP V CONNECTOR (PDF, English) Application Specifications: - None Available Instruction Sheets: - None Available CAD Files: - None Available	Additional Information: - Product Line Information Related Products: - Tooling
List all Documents	

Product Features (Please use the Product Drawing for all design activity)	
Product Type Features: - Product Type = Connector - Product Line = CHAMP - PCB Mount Style = Right Angle - Orientation = Standard - Profile = Standard - Mating Connector Lock = With - Mating Connector Lock Type = Screwlocks - PCB Mount Retention = With - Grounded = No - Panel Thickness (mm [in]) = 1.60 [0.063] - Color = Black - Bracket Material = Zinc Mechanical Attachment: - Panel Mount Retention = With - Panel Attachment Style = Rear Mount - Bail-Clip Material = Stainless Steel Electrical Characteristics: - Shielded = No Body Features: - Centerline (mm [in]) = 2.16 [0.085] - Number of Positions = 50 - PCB Mount Retention Type = Boardlock(s)	Contact Features: - Contact Plating, Mating Area, Material = Gold (30) - Contact Base Material = Phosphor Bronze Housing Features: - Connector Style = Receptacle - Housing Material = PBT - GF - UL Flammability Rating = UL 94V-0 Industry Standards: - RoHS/ELV Compliance = RoHS compliant, ELV compliant - Lead Free Solder Processes = Not reviewed for lead free solder process - RoHS/ELV Compliance History = Always was RoHS compliant Conditions for Usage: - PCB Thickness, Recommended (mm [in]) = 1.60 - 3.20 [0.063 - 0.125] Operation/Application: - Application = ACTION PIN (Solderless) Other: - Brand = AMP