
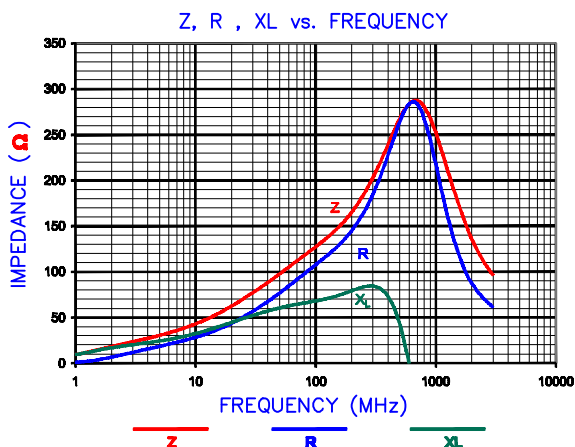


PHYSICAL DIMENSIONS:

A	11.38 [1.448]	$\pm$ 0.18 [0.007]
B	11.38 [1.448]	$\pm$ 0.18 [0.007]
B1	14.10 [1.555]	MAX
C	9.32 [1.367]	$\pm$ 0.18 [0.007]
C1	10.16 [1.400]	MAX
D	7.62 [1.300]	$\pm$ 0.10 [0.004]
E	2.54 [1.100]	$\pm$ 0.13 [0.005]


T ₁	2.90 [1.114]	$\pm$ 0.25 [0.010]
T ₂	0.84 [0.033]	TYP.
T ₃	0.46 [0.018]	TYP.

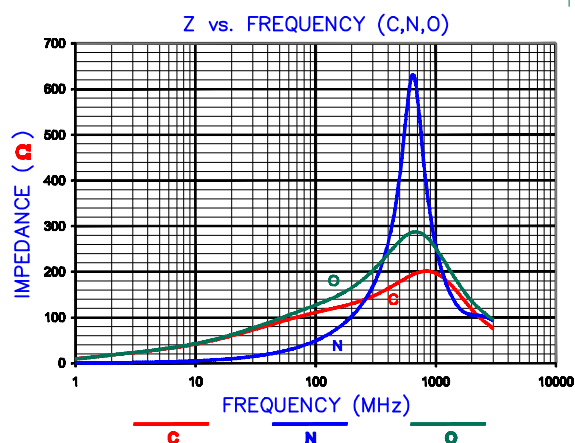

CM4545Z131R-10

**UNCONTROLLED
DOCUMENT**

RoHS
2002/95/EC

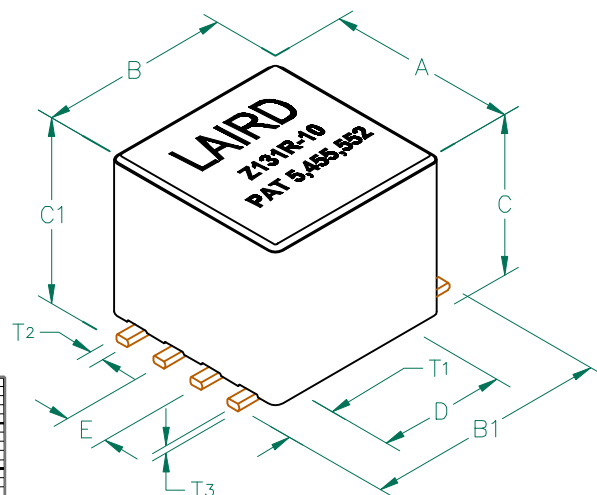


ELECTRICAL CHARACTERISTICS:

	Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	Rated Voltage (VDC)
Nominal	130			
Minimum	98			
Maximum	163	0.01	10,000 mA	140


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 400 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION CART449-63.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.
6. OPERATION TEMPERATURE (INCLUDING SELF-HEATING): -40 ~ +125°C.


LAND PATTERN FOR REFLOW SOLDERING

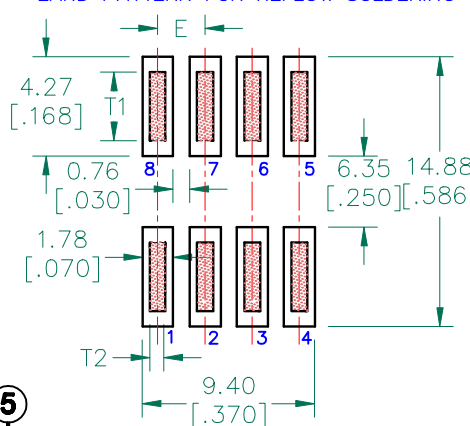





RECOMMENDED SOLDERING CONDITIONS

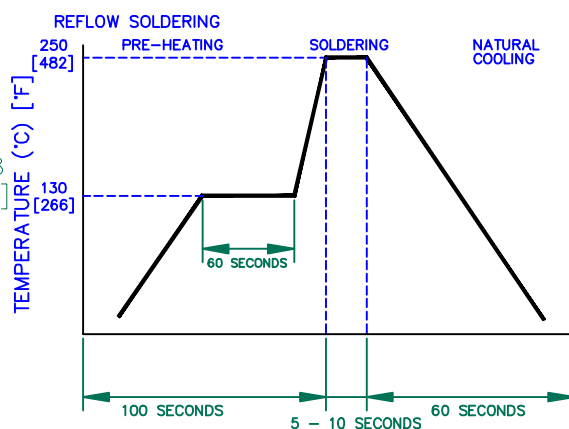

EQUIVALENT CIRCUIT



DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	ADD RATED VOLTAGE AND NOTE 6	08/30/12	QU	PROJECT/PART NUMBER: CM4545Z131R-10			
C	UPDATE LOGO & KAPTON LABEL ADD EC	11/11/08	JRK				
B	UPDATE COMPANY LOGO	12/10/07	JRK				
A	ORIGINAL DRAFT	06/02/04	JRK				
REV	DESCRIPTION	DATE		DATE: 06/02/04	SCALE: NTS	SHEET: 2 of 3	
				CAD # CM4545Z131R-10-D-2	TOOL # H0449-600		

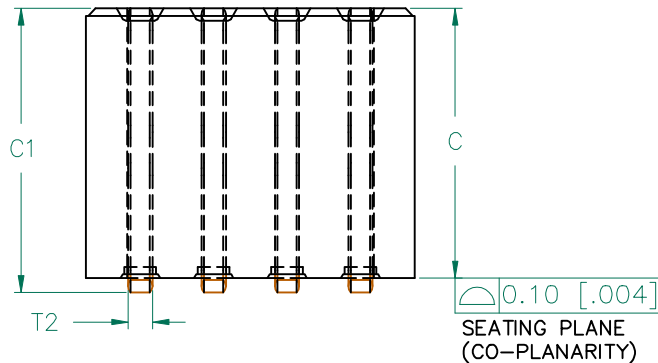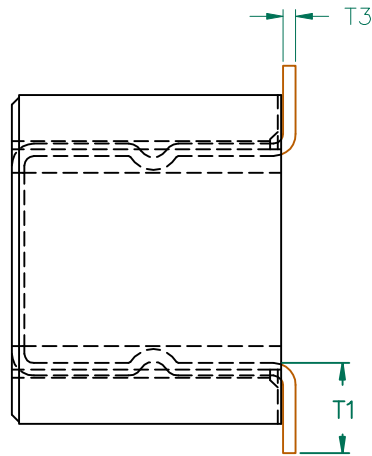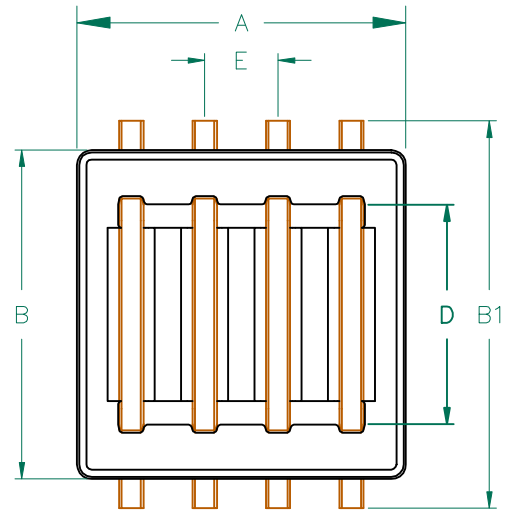

LAIRD
Z131R-10
PAT 5,455,552

LABEL

**UNCONTROLLED
DOCUMENT**

ELECTRICAL TESTING

TEST:	Z	Z
# TURNS	1	1
AWG	22	22
FREQUENCY	25 MHz	100 MHz
NOMINAL	70 Ω	130 Ω
MINIMUM	53 Ω	98 Ω
MAXIMUM	- Ω	163 Ω
WEIGHT/1000	5.13 kgs.	11.32 lbs.

NOTES: UNLESS OTHERWISE SPECIFIED

1. WIRE: REFERENCE STEWARD WIRE PURCHASE SPEC. W0449-61.
2. IMPEDANCE VALUES ARE GROSS, MEASURED USING W0449-61 WIRE PLACED AGAINST END OF SLOT w/ NO D.C. BIAS.
3. REFERENCE STEWARD CORE P/N 29H0449-600.
4. PROTECTED BY U.S. PATENT NO. 5,455,552.
5. TERMINATION FINISH IS 100% TIN.
6. THIS PART HAS NO PIN POLARITY.

DIMENSIONS:

A	11.38 [.448]	+	0.18 [.007]
B	11.38 [.448]	+	0.18 [.007]
B1	14.10 [.555]	+	MAX
C	9.32 [.367]	+	0.18 [.007]
C1	10.16 [.400]	+	MAX
D	7.62 [.300]	+	0.10 [.004]
E	2.54 [.100]	+	0.13 [.005]

WIRE DIMENSIONS:

T1	2.90 [.114]	+	0.25 [.010]
T2	0.84 [.033]	+	TYP.
T3	0.46 [.018]	+	TYP.



DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	ADD RATED VOLTAGE AND NOTE 6	08/30/12	QIU	PROJECT/PART NUMBER:		REV	DRAWN BY:
C	UPDATE LOGO & KAPTON LABEL ADD EC	11/11/08	JRK	CM4545Z131R-10		D	JRK
B	UPDATE COMPANY LOGO	12/10/07	JRK	DATE: 06/02/04		SCALE: NTS	
A	ORIGINAL DRAFT	06/02/04	JRK	CAD #		H0449-600	
REV	DESCRIPTION	DATE		CM4545Z131R-10-D-3		TOOL #	
						3 of 3	

