

# MF3ICD8101

MIFARE DESFire contactless multi-application IC  
BL-ID Doc. No.: 145610

Rev. 01.00 — 11 December 2007

Objective short data sheet

## 1. General description

---

NXP has developed the MIFARE DESFire (MF3ICD8101) to be used with Proximity Coupling Devices (PCDs) according to ISO/IEC 14443 Type A. The transport protocol complies to part ISO/IEC 14443-4. The MF3ICD8101 is primarily designed for secure contactless transport applications and related loyalty programs.

## 2. Features

---

### 2.1 RF Interface: ISO/IEC 14443 Type A

- Contactless transmission of data and powered by the RF-field (no battery needed)
- Operating distance: Up to 100 mm (depending on antenna geometry)
- Operating frequency: 13.56 MHz
- Fast data transfer: 106 kbit, 212 kbit, 424 kbit, 848 kbit
- High data integrity: 16-bit/32-bit CRC, parity, bit coding, bit counting; CMAC; MAC
- True deterministic anticollision
- 7 byte unique identifier (cascade level two according to ISO/IEC 14443-3)
- Uses ISO/IEC 14443-4 protocol

### 2.2 ISO/IEC 7816 compatibility (only software version 0.6 and higher)

- Supports ISO/IEC 7816-3 APDU message Structure
- Supports ISO/IEC 7816-4 INS code 'A4' SELECT
- Supports ISO/IEC 7816-4 INS code 'B0' READ BINARY
- Supports ISO/IEC 7816-4 INS code 'D6' UPDATE BINARY
- Supports ISO/IEC 7816-4 INS code 'B2' for READ RECORDS
- Supports ISO/IEC 7816-4 INS code 'E2' for APPEND RECORD
- Supports ISO/IEC 7816-4 INS code '84' for GET CHALLENGE
- Supports ISO/IEC 7816-4 INS code '88' for INTERNAL AUTHENTICATE
- Supports ISO/IEC 7816-4 INS code '82' for EXTERNAL AUTHENTICATE

### 2.3 Non-volatile memory

- 8 kB NV-Memory
- Data retention of 10 years
- Write endurance typical 500 000 cycles

## 2.4 NV-memory organization

- Flexible file system
- Up to 28 applications simultaneously on one PICC
- Up to 32 files in each application

## 2.5 Security

- Unique 7 byte serial number for each device
- Mutual three pass authentication
- Mutual authentication according to ISO/IEC 7816-4
- Data encryption on RF-channel with replay attack protection:
- Hardware DES using 56-bit, 112-bit and 168-bit keys featuring key version, data authenticity by 8 byte CMAC
- Hardware AES using 128-bit keys featuring key version, data authenticity by 8 byte CMAC
- Authentication on application level
- Hardware exception sensors
- Self-securing file system
- Backward compatibility to MF3ICD4001: 4 byte MAC

## 3. Applications

- Transport
- Access control
- Loyalty
- Internet applications

## 4. Quick reference data

Table 1. Quick reference data [\[1\]](#)[\[2\]](#)

| Symbol           | Parameter                               | Conditions               | Min    | Typ    | Max   | Unit   |
|------------------|-----------------------------------------|--------------------------|--------|--------|-------|--------|
| C <sub>ISS</sub> | input capacitance<br>(LCR meter HP4258) | 22 °C,<br>13.56 MHz, 2 V | 14.96  | 17.0   | 19.04 | pF     |
| t <sub>W</sub>   | EEPROM write time                       |                          | -      | 2.9    | -     | ms     |
| t <sub>RET</sub> | EEPROM data retention                   |                          | 10     | -      | -     | years  |
| N <sub>WE</sub>  | EEPROM write endurance                  |                          | 200000 | 500000 | -     | cycles |
| f <sub>i</sub>   | input frequency                         |                          | —      | 13.56  | -     | MHz    |

[1] Stresses above one or more of the values may cause permanent damage to the device


[2] Exposure to limiting values for extended periods may affect device reliability

5. Ordering information

Table 2. Ordering information

| Type number      | Package |                   |         |
|------------------|---------|-------------------|---------|
|                  | Name    | Description       | Version |
| MF3ICD8101DUD/01 | Wafer   | Die on sawn wafer | -       |

6. Block diagram

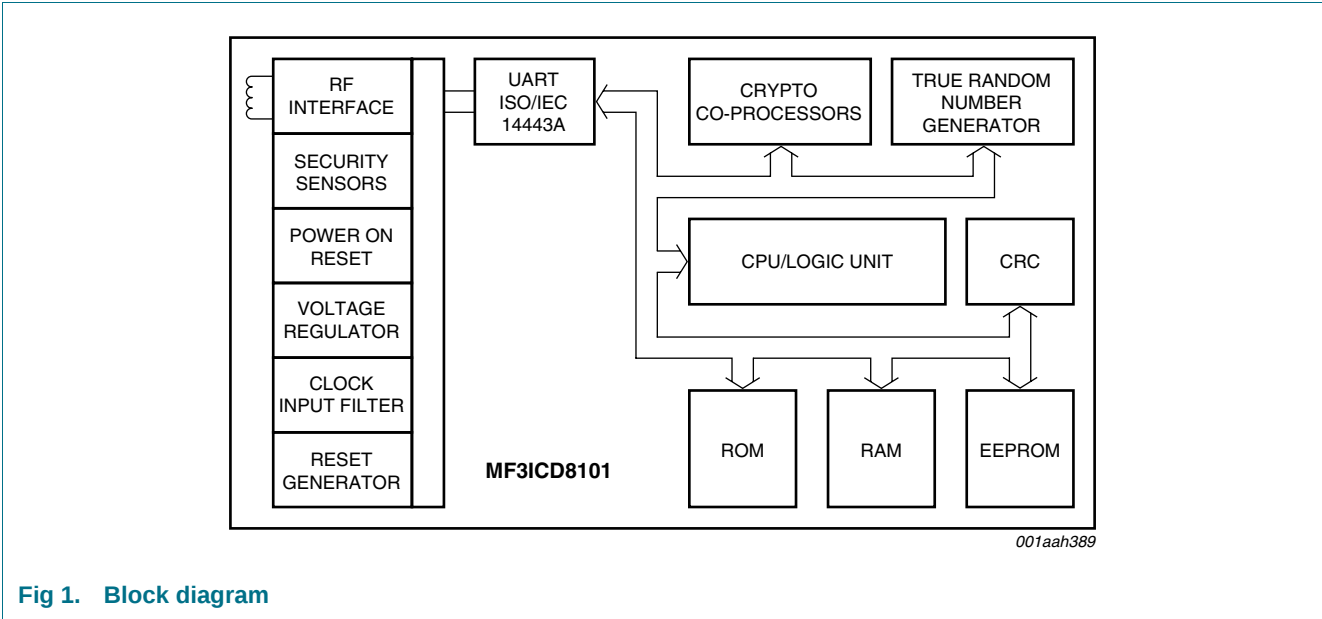

7. Limiting values

Table 3. Limiting values [1][2]  
In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol           | Parameter                           | Conditions | Min   | Max | Unit |
|------------------|-------------------------------------|------------|-------|-----|------|
| $I_I$            | input current                       |            | -     | 30  | mA   |
| $P_{tot (pack)}$ | total power dissipation per package |            | -     | 200 | mW   |
| $T_{stg}$        | storage temperature                 |            | -55   | 125 | °C   |
| $T_{oper}$       | operating temperature               |            | -25   | 70  | °C   |
| $V_{esd}$        | electrostatic discharge voltage     | [3]        | 2     | -   | kV   |
| $I_{lu}$         | latch-up current                    |            | ± 100 | -   | mA   |

- [1] Stresses above one or more of the limiting values may cause permanent damage to the device  
[2] Exposure to limiting values for extended periods may affect device reliability  
[3] MIL Standard 883-C method 3015; Human body model: C = 100 pF, R = 1.5 kΩ

## 8. Functional description

### 8.1 Contactless energy and data transfer

In the MIFARE system, the MF3ICD8101 is connected to a coil consisting of a few turns embedded in a standard ISO/IEC smart card. No battery is needed. When the card is positioned in the proximity of the PCD antenna, the high speed RF communication interface allows to transmit data with up to 848 kbit/s.

### 8.2 Anticollision

An intelligent anticollision mechanism allows handling more than one PICC in the field simultaneously. The anticollision algorithm selects each PICC individually and ensures that the execution of a transaction with a selected PICC is performed correctly without data corruption resulting from other PICCs in the field.

### 8.3 UID/serial number

The unique 7 byte serial number (UID) is programmed into a locked part of the NV-memory which is reserved for the manufacturer. Due to security and system requirements these bytes are write-protected after being programmed by the IC manufacturer at production time. According to ISO/IEC 14443-3 during the first anticollision loop the cascade tag will be returned 0x88 and the first 3 bytes of the UID, SN0 to SN2 and BCC. The second anticollision loop will return bytes SN3 to SN6 and BCC.

SN0 holds the Manufacturer ID for NXP (04h) according to ISO/IEC 14443-3 and ISO/IEC 7816-6 AMD 1.

### 8.4 Memory organization

The 8 kB NV-memory is organized using a flexible file system. This file system allows a maximum of 28 different applications on one single PICC. Each application provides up to 32 files. Every application is represented by its 3 bytes Application IDentifier, AID.

Five different file types are supported.

A guideline to assign DESFire AIDs can be found in the application note "MIFARE Application Directory, MAD".

Each file can be created either at PICC initialization (card production / card printing), at PICC personalization (vending machine) or in the field.

If a file or application becomes obsolete in operation, it can be permanently invalidated.

Commands which have impact on the file structure itself (e.g. creation or deletion of applications, change of keys) activate an automatic rollback mechanism, which protects the file structure from getting corrupted.

If this rollback is necessary, it is done without user interaction before carrying out further commands. To ensure data integrity on application level, a transaction oriented backup is implemented for all file types with backup. It is possible to mix file types with and without backup within one application.

## 8.5 Available file types

The files within an application can be of different types as:

- Standard Data Files
- Backup Data Files
- Value Files with Backup
- Linear Record Files with Backup
- Cyclic Record Files with Backup

## 8.6 Security

The 7 byte UID is unchangeably programmed into each device during production. It cannot be altered and ensures the uniqueness of each device.

The UID may be used to derive diversified keys for each ticket. Diversified PICC keys contribute to gain an effective anti-cloning mechanism.

**Remark:** For new authentications other than 0Ah, the init vector for the calculation of the MAC is only reset to '00h' after the authentication. So the init vector shall be remembered during the whole transaction until a new authentication is calculated.

## 8.7 3 pass authentication

Prior to data transmission a mutual three pass authentication can be done between PICC and PCD depending on the configuration employing either 56-bit DES (single DES, DES), 112-bit DES (triple DES, 3DES), 168-bit DES (3 key triple DES, 3K3DES) or AES. During the authentication the security level of all further commands during the session is set.

Three pass authentication proves that both parties (PCD and PICC) are owner of a common secret (DES, 3DES, 3K3DES, AES key). The result of a successful authentication is a trusted link between both parties. The authentication command also yields a session key that you can use to protect the data transmission channel.

## 9. DESFire command set

### 9.1 ISO/IEC 14443-3:

Table 4. ISO/IEC 14443-3

| Command                                | Description                                                                                                                  |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| REQA                                   | REQA and ATQA are implemented fully according to ISO/IEC 14443-3.                                                            |
| WUPA                                   | WAKE-UP is implemented fully according to ISO/IEC 14443-3.                                                                   |
| ANTICOLLISION / SELECT Cascade Level 1 | The ANTICOLLISION and SELECT commands are implemented fully according to ISO/IEC 14443-3. The response is part 1 of the UID. |
| ANTICOLLISION / SELECT Cascade Level 2 | The ANTICOLLISION and SELECT commands are implemented fully according to ISO/IEC 14443-3. The response is part 2 of the UID. |

### 9.2 ISO/IEC 14443-4:

Table 5. ISO/IEC 14443-4:

| Command | Description                                                                                                                                                                                                                                                                           |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RATS    | The response to the RATS command identifies the PICC type to the PCD.                                                                                                                                                                                                                 |
| PPS     | The PPS command allows an individual selection of the communication baud rate between PCD and PICC. For DESFire it is possible to individually set the communication baud rate independently for both directions i.e. DESFire allows a non-symmetrical information interchange speed. |
| WTX     | If the PICC needs more time than the defined FWT to respond to a PCD command it will send a request for a waiting time extension.                                                                                                                                                     |

### 9.3 MF3ICD8101 command set overview – security related commands:

Table 6. Security related commands

| Command            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Authenticate       | In this procedure both, the PICC as well as the reader device, show in an encrypted way that they possess the same secret which especially means the same key. This procedure not only confirms that both entities are permitted to do operations on each other but also creates a session key which can be used to keep the further communication path secure. As the name "session key" implicitly indicates, each time a new authentication procedure is successfully completed a new key for further cryptographic operations is generated. |
| Change KeySettings | Changes the master key settings on PICC and application level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Set Configuration  | Configures the card and pre personalizes the card with a key, defines if the UID or the random ID is sent back during communication setup and configures the ATS string.                                                                                                                                                                                                                                                                                                                                                                        |
| Change Key         | Changes any key stored on the PICC.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Get KeyVersion     | Reads out the current key version of any key stored on the PICC.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**Remark:** All command & data frames are exchanged between PICC and PCD by using block format as defined in ISO/IEC 14443-4.

## 9.4 MF3ICD8101 command set overview – PICC level commands:

Table 7. PICC level commands

| Command              | Description                                                                                                                                                            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Create Application   | Creates new applications on the PICC.                                                                                                                                  |
| Delete Application   | Permanently deactivates applications on the PICC.                                                                                                                      |
| Get Applications IDs | Returns the Application IDentifiers of all applications on a PICC.                                                                                                     |
| Free Memory          | Returns the free memory available on the card                                                                                                                          |
| GetDFNames           | Returns the DF names                                                                                                                                                   |
| Get KeySettings      | Gets information on the PICC and application master key settings. In addition it returns the maximum number of keys which are configured for the selected application. |
| Select Application   | Selects one specific application for further access.                                                                                                                   |
| FormatPICC           | Releases the PICC user memory.                                                                                                                                         |
| Get Version          | Returns manufacturing related data of the PICC.                                                                                                                        |
| GetCardUID           | Returns the UID.                                                                                                                                                       |

**Remark:** All command & data frames are exchanged between PICC and PCD by using block format as defined in ISO/IEC 14443-4.

## 9.5 MF3ICD8101 command set overview – application level commands:

Table 8. Application level commands

| Command                 | Description                                                                                                                                                                                                                                                                                                                         |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Get FileIDs             | Returns the File IDentifiers of all active files within the currently selected application.                                                                                                                                                                                                                                         |
| Get FileSettings        | Get information on the properties of a specific file.                                                                                                                                                                                                                                                                               |
| Change FileSettings     | Changes the access parameters of an existing file.                                                                                                                                                                                                                                                                                  |
| Create StdDataFile      | Creates files for the storage of plain unformatted user data within an existing application on the PICC.                                                                                                                                                                                                                            |
| Create BackupDataFile   | Creates files for the storage of plain unformatted user data within an existing application on the PICC, additionally supporting the feature of an integrated backup mechanism.                                                                                                                                                     |
| Create ValueFile        | Creates files for the storage and manipulation of 32-bit signed integer values within an existing application on the PICC.                                                                                                                                                                                                          |
| Create LinearRecordFile | Creates files for multiple storage of structural similar data, for example for loyalty programs, within an existing application on the PICC. Once the file is filled completely with data records, further writing to the file is not possible unless it is cleared.                                                                |
| Create CyclicRecordFile | Creates files for multiple storage of structural similar data, for example for logging transactions, within an existing application on the PICC. Once the file is filled completely with data records, the PICC automatically overwrites the oldest record with the latest written one. This wrap is fully transparent for the PCD. |
| DeleteFile              | Permanently deactivates a file within the file directory of the currently selected application.                                                                                                                                                                                                                                     |

**Remark:** All command & data frames are exchanged between PICC and PCD by using block format as defined in ISO/IEC 14443-4.

## 9.6 MF3ICD8101 command set overview – data manipulation commands:

Table 9. Data manipulation commands

| Command            | Description                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------------------|
| Read Data          | Reads data from Standard Data Files or Backup Data Files.                                                         |
| Write Data         | Writes data to Standard Data Files or Backup Data Files.                                                          |
| Get Value          | Reads the currently stored value from Value Files.                                                                |
| Credit             | Increases a value stored in a Value File.                                                                         |
| Debit              | Decreases a value stored in a Value File.                                                                         |
| Limited Credit     | Allows a limited increase of a value stored in a Value File without having full Credit permissions to the file.   |
| Write Record       | Writes data to a record in a Cyclic or Linear Record File.                                                        |
| Read Records       | Reads out a set of complete records from a Cyclic or Linear Record File.                                          |
| Clear RecordFile   | Resets a Cyclic or Linear Record File to empty state.                                                             |
| Commit Transaction | Validates all previous write access' on Backup Data Files, Value Files and Record Files within one application.   |
| Abort Transaction  | Invalidates all previous write access' on Backup Data Files, Value Files and Record Files within one application. |

**Remark:** All command & data frames are exchanged between PICC and PCD by using block format as defined in ISO/IEC 14443-4.

## 9.7 MF3ICD8101 command set- ISO/IEC 7816 APDU commands:

The MF3ICD8101 provides the following command set according to ISO/IEC 7816-4 clause 6:

- INS code 'A4' SELECT
- INS code 'B0' READ BINARY
- INS code 'D6' UPDATE BINARY
- INS code 'B2' READ RECORDS
- INS code 'E2' APPEND RECORD
- INS code '84' GET CHALLENGE
- INS code '88' INTERNAL AUTHENTICATE
- INS code '82' EXTERNAL AUTHENTICATE

### 9.7.1 ISO/IEC 7816-4 APDU message structure:

DESFire supports the APDU message structure according to ISO/IEC 7816-4 for

- an optional wrapping of the native DESFire APDU format
- for the additionally implemented ISO/IEC 7816-4 commands

## 10. Abbreviations

Table 10. Abbreviations

| Acronym | Description                                         |
|---------|-----------------------------------------------------|
| AES     | Advanced Encryption Standard                        |
| AID     | Application Identifier                              |
| APDU    | Application Protocol Data Unit                      |
| ATS     | Answer to Select                                    |
| CMAC    | Cryptic Message Authentication Code                 |
| CRC     | Cyclic Redundancy Check                             |
| DES     | Digital Encryption Standard                         |
| DF      | Dedicated File                                      |
| EEPROM  | Electrically Erasable Programmable Read-Only Memory |
| FWT     | Frame Waiting Time                                  |
| INS     | Instructions                                        |
| MAC     | Message Authentication Code                         |
| MAD     | MIFARE Application Directory                        |
| NV      | Non Volatile Memory                                 |
| PCD     | Proximity Coupling Device                           |
| PICC    | Proximity Integrated Circuit Card                   |
| PPS     | Protocol Parameter Selection                        |
| RATS    | Request Answer To Select                            |
| REQA    | Request Answer                                      |
| RF      | Radio Frequency                                     |
| UID     | Unique Identifier                                   |
| WTX     | Waiting Time Extension                              |
| WUPA    | Wake Up Protocol A                                  |

## 11. Revision history

Table 11. Revision history

| Document ID                                                     | Release date | Data sheet status          | Change notice | Supersedes |
|-----------------------------------------------------------------|--------------|----------------------------|---------------|------------|
| MF3ICD8101_SDS_N_1                                              | 20071211     | Objective short data sheet | -             | -          |
| <ul style="list-style-type: none"><li>Initial version</li></ul> |              |                            |               |            |

## 12. Legal information

### 12.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 12.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 12.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**MIFARE** — is a trademark of NXP B.V.

**DESFire** — is a trademark of NXP B.V.

## 13. Contact information

For additional information, please visit: <http://www.nxp.com>

For sales office addresses, send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 14. Tables

|          |                                                       |   |           |                                      |    |
|----------|-------------------------------------------------------|---|-----------|--------------------------------------|----|
| Table 1. | Quick reference data <a href="#">[1][2]</a> . . . . . | 2 | Table 7.  | PICC level commands . . . . .        | 7  |
| Table 2. | Ordering information . . . . .                        | 3 | Table 8.  | Application level commands . . . . . | 7  |
| Table 3. | Limiting values <a href="#">[1][2]</a> . . . . .      | 3 | Table 9.  | Data manipulation commands . . . . . | 8  |
| Table 4. | ISO/IEC 14443-3 . . . . .                             | 6 | Table 10. | Abbreviations . . . . .              | 9  |
| Table 5. | ISO/IEC 14443-4: . . . . .                            | 6 | Table 11. | Revision history . . . . .           | 10 |
| Table 6. | Security related commands . . . . .                   | 6 |           |                                      |    |

## 15. Figures

|        |                         |   |
|--------|-------------------------|---|
| Fig 1. | Block diagram . . . . . | 3 |
|--------|-------------------------|---|

## 16. Contents

|          |                                                                            |          |           |                                                                         |           |
|----------|----------------------------------------------------------------------------|----------|-----------|-------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>General description . . . . .</b>                                       | <b>1</b> | 9.6       | MF3ICD8101 command set overview – data manipulation commands: . . . . . | 8         |
| <b>2</b> | <b>Features . . . . .</b>                                                  | <b>1</b> | 9.7       | MF3ICD8101 command set- ISO/IEC 7816 APDU commands: . . . . .           | 8         |
| 2.1      | RF Interface: ISO/IEC 14443 Type A . . . . .                               | 1        | 9.7.1     | ISO/IEC 7816-4 APDU message structure: . . . . .                        | 8         |
| 2.2      | ISO/IEC 7816 compatibility (only software version 0.6 and higher). . . . . | 1        | <b>10</b> | <b>Abbreviations . . . . .</b>                                          | <b>9</b>  |
| 2.3      | Non - volatile memory. . . . .                                             | 1        | <b>11</b> | <b>Revision history . . . . .</b>                                       | <b>10</b> |
| 2.4      | NV-memory organization . . . . .                                           | 2        | <b>12</b> | <b>Legal information . . . . .</b>                                      | <b>11</b> |
| 2.5      | Security. . . . .                                                          | 2        | 12.1      | Data sheet status . . . . .                                             | 11        |
| <b>3</b> | <b>Applications . . . . .</b>                                              | <b>2</b> | 12.2      | Definitions . . . . .                                                   | 11        |
| <b>4</b> | <b>Quick reference data . . . . .</b>                                      | <b>2</b> | 12.3      | Disclaimers . . . . .                                                   | 11        |
| <b>5</b> | <b>Ordering information. . . . .</b>                                       | <b>3</b> | 12.4      | Trademarks . . . . .                                                    | 11        |
| <b>6</b> | <b>Block diagram . . . . .</b>                                             | <b>3</b> | <b>13</b> | <b>Contact information . . . . .</b>                                    | <b>12</b> |
| <b>7</b> | <b>Limiting values. . . . .</b>                                            | <b>3</b> | <b>14</b> | <b>Tables. . . . .</b>                                                  | <b>13</b> |
| <b>8</b> | <b>Functional description . . . . .</b>                                    | <b>4</b> | <b>15</b> | <b>Figures . . . . .</b>                                                | <b>13</b> |
| 8.1      | Contactless energy and data transfer. . . . .                              | 4        | <b>16</b> | <b>Contents. . . . .</b>                                                | <b>13</b> |
| 8.2      | Anticollision. . . . .                                                     | 4        |           |                                                                         |           |
| 8.3      | UID/serial number. . . . .                                                 | 4        |           |                                                                         |           |
| 8.4      | Memory organization . . . . .                                              | 4        |           |                                                                         |           |
| 8.5      | Available file types . . . . .                                             | 5        |           |                                                                         |           |
| 8.6      | Security. . . . .                                                          | 5        |           |                                                                         |           |
| 8.7      | 3 pass authentication . . . . .                                            | 5        |           |                                                                         |           |
| <b>9</b> | <b>DESFire command set. . . . .</b>                                        | <b>6</b> |           |                                                                         |           |
| 9.1      | ISO/IEC 14443-3: . . . . .                                                 | 6        |           |                                                                         |           |
| 9.2      | ISO/IEC 14443-4: . . . . .                                                 | 6        |           |                                                                         |           |
| 9.3      | MF3ICD8101 command set overview – security related commands: . . . . .     | 6        |           |                                                                         |           |
| 9.4      | MF3ICD8101 command set overview – PICC level commands: . . . . .           | 7        |           |                                                                         |           |
| 9.5      | MF3ICD8101 command set overview – application level commands: . . . . .    | 7        |           |                                                                         |           |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

founded by

**PHILIPS**

© NXP B.V. 2007.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 11 December 2007

Document identifier: MF3ICD8101\_SDS\_N\_1