

TIL111X, TIL114X, TIL116X, TIL117X
TIL111, TIL114, TIL116, TIL117



**OPTICALLY COUPLED
ISOLATOR
PHOTOTRANSISTOR OUTPUT**

APPROVALS

- UL recognised, File No. E91231
- **'X' SPECIFICATION APPROVALS**
- TIL111X is VDE 0884 approved in 3 available lead forms : -
 - STD
 - G form
 - SMD approved to CECC 00802
- TIL114X, TIL116X, TIL117X : - VDE 0884 pending
- TIL111X is certified to EN60950 by the following Test Bodies :-
 - Nemko - Certificate No. P96101299
 - Fimko - Registration No. 190469-01..22
 - Semko - Reference No. 9620076 01
 - Demko - Reference No. 305567
- TIL114X, TIL116X, TIL117X : - EN60950 pending

DESCRIPTION



The TIL111, TIL114, TIL116, TIL117 series of optically coupled isolators consist of infrared light emitting diode and NPN silicon photo transistor in a standard 6 pin dual in line plastic package.

FEATURES

- Options :-
 - 10mm lead spread - add G after part no.
 - Surface mount - add SM after part no.
 - Tape&reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV_{RMS}, 7.5kV_{PK})

APPLICATIONS

- DC motor controllers
- Industrial systems controllers
- Signal transmission between systems of different potentials and impedances

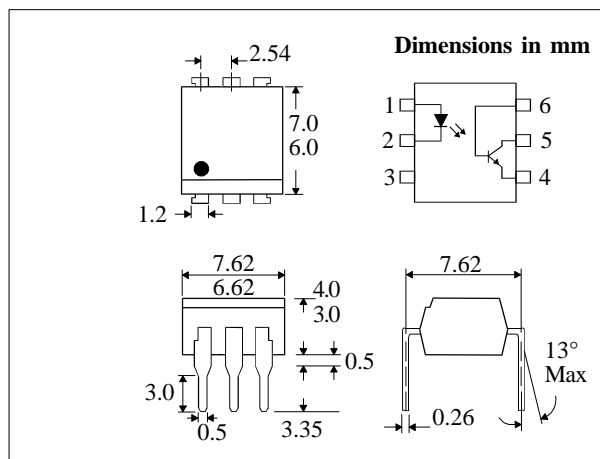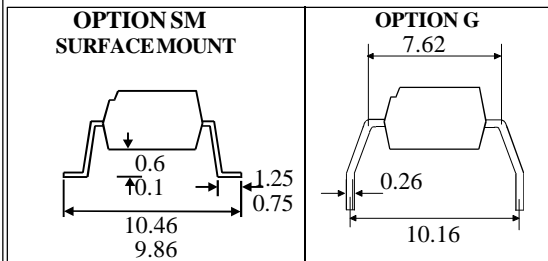

**ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)**

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUT DIODE

Forward Current	60mA
Reverse Voltage	6V
Power Dissipation	105mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO}	30V
Collector-base Voltage BV_{CBO}	70V
Emitter-collector Voltage BV_{ECO}	6V
Power Dissipation	160mW

POWER DISSIPATION

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, TS25 1YD England Tel: (01429)863609
Fax : (01429) 863581 e-mail sales@isocom.co.uk
http://www.isocom.com

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214) 495-0755 Fax: (214) 495-0901
e-mail info@isocom.com
http://www.isocom.com

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)		1.2	1.4	V	$I_F = 16\text{mA}$ $I_R = 10\mu\text{A}$ $V_R = 6\text{V}$
	Reverse Voltage (V_R)	6			V	
	Reverse Current (I_R)			10	μA	
Output	Collector-emitter Breakdown (BV_{CEO})	30			V	$I_C = 1\text{mA}$ (note 2) $I_C = 100\mu\text{A}$ $I_E = 100\mu\text{A}$ $V_{CE} = 10\text{V}$ $V_{CE} = 10\text{V}$ $10\text{mA } I_C, 5\text{V } V_{CE}$
	Collector-base Breakdown (BV_{CBO})	70			V	
	Emitter-collector Breakdown (BV_{ECO})	6			V	
	Collector-emitter Dark Current (I_{CEO})			50	nA	
	Collector-base Dark Current (I_{CBO})			20	nA	
	Transistor Static Gain (h_{FE})	200				
Coupled	On-state Collector Current ($I_{C,on}$)					$16\text{mA } I_F, 0.4\text{V } V_{CE}$ $10\text{mA } I_F, 10\text{V } V_{CE}$ $10\text{mA } I_F, 10\text{V } V_{CE}$ $16\text{mA } I_F, 2\text{mA } I_C$ $15\text{mA } I_F, 2.2\text{mA } I_C$ $10\text{mA } I_F, 0.5\text{mA } I_C$ See note 1 See note 1 $V_{IO} = 500\text{V}$ (note 1) $V_{CC} = 10\text{V}, I_C = 2\text{mA}$ $R_L = 100\Omega$ fig 1
	TIL111, TIL114	20			%	
	TIL116	20			%	
	TIL117	50			%	
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$					
	TIL111, TIL114			0.4	V	
	TIL116			0.4	V	
	TIL117			0.4	V	
	Input to Output Isolation Voltage V_{ISO}	5300			V_{RMS}	
		7500			V_{PK}	
Input-output Isolation Resistance R_{ISO}	5×10^{10}			Ω		
Output Rise Time t_r			10	μs		
Output Fall Time t_f			10	μs		

- Note 1 Measured with input leads shorted together and output leads shorted together.
 Note 2 Special Selections are available on request. Please consult the factory.



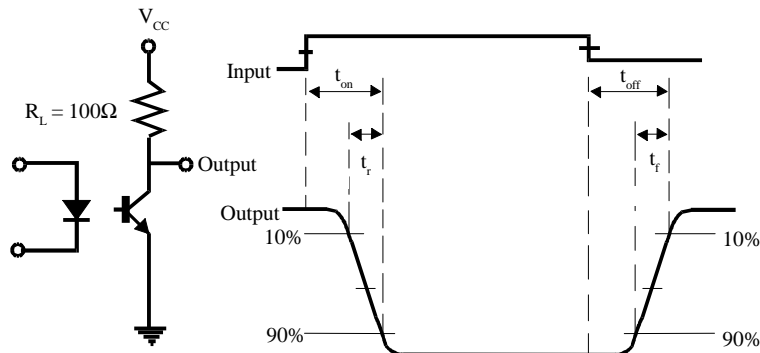


FIG 1


Collector Power Dissipation vs. Ambient Temperature

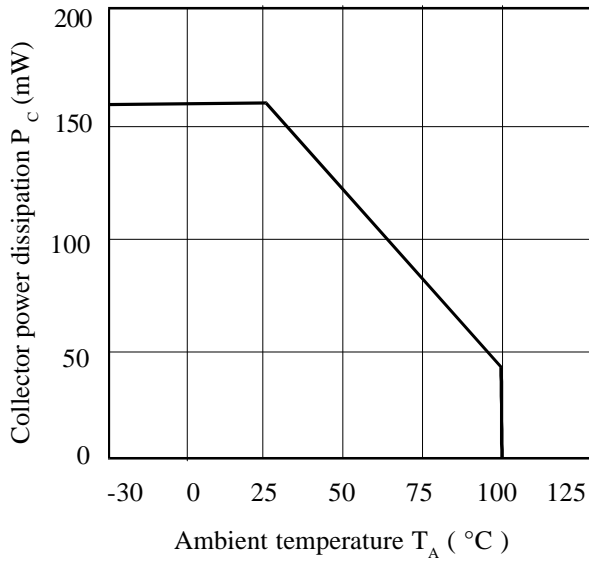


Relative Current Transfer Ratio vs. Forward Current (TIL111, TIL114)

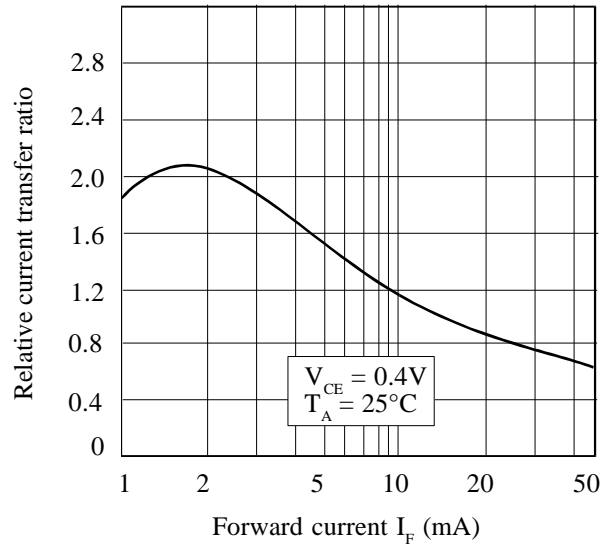


Forward Current vs. Ambient Temperature

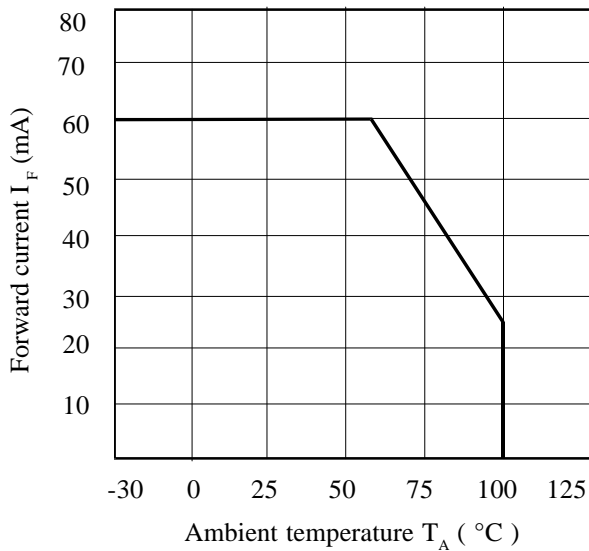

Relative Current Transfer Ratio vs. Forward Current (TIL116, TIL117)

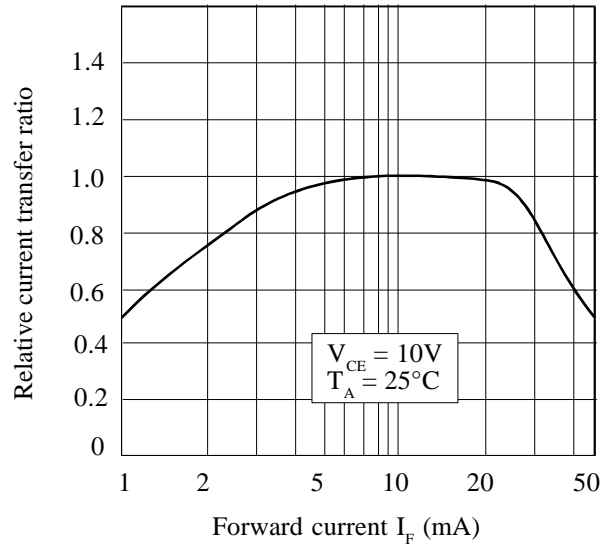

Relative Current Transfer Ratio vs. Ambient Temperature (TIL116, TIL117)

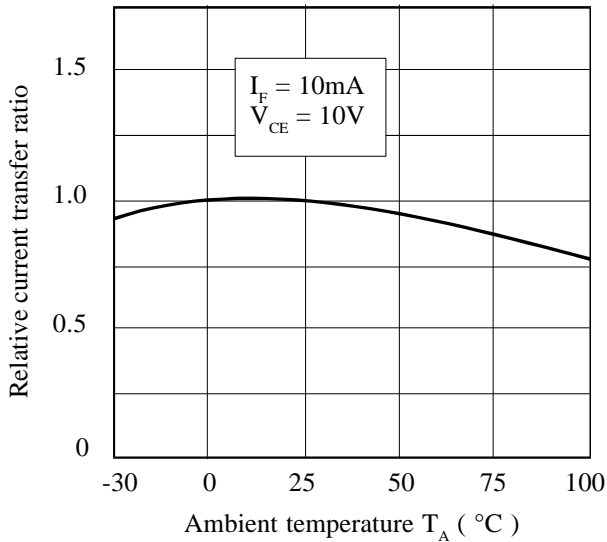

Relative Current Transfer Ratio vs. Ambient Temperature (TIL111, TIL114)

