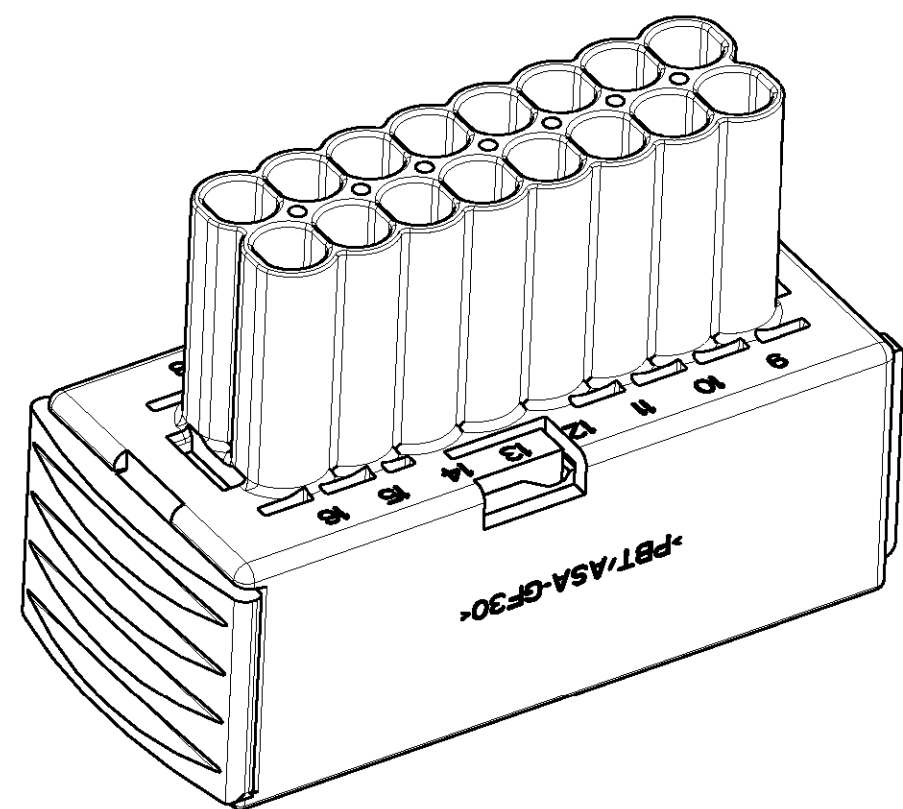
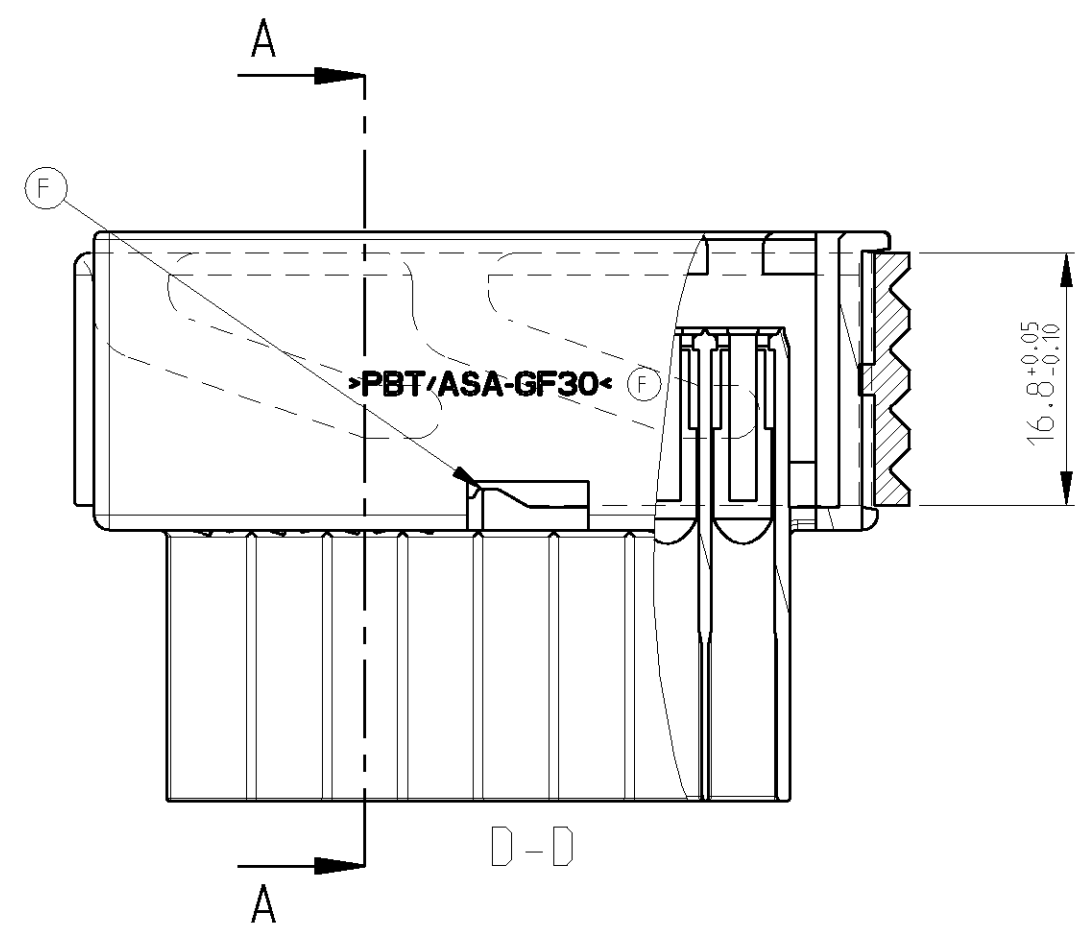


[illegible]

	Au-VERSION OF CONTACT IS 1-xxxxxx-1 Au-Version des Kontaktes ist 1-xxxxxx-1
(F1) 	WATER TIGHTNESS ACC. GMI 12590; 5.10.3 FURTHER INFORMATIONS SEE PRODUCT SPECIFICATION 108-18102-1/...-9 Wasserdichtheit nach GMI 12590, 5.10.3 Weitere Informationen siehe Produktspezifikation 108-18102-1/...-9
	Einfall bis auf 23.5mm zulässig SHRINKAGE UP TO 23.5MM ALLOWED

-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	(F2)	-	-	-
1-964449-1	1-967242-1 CODING A1	F	1	PBT/ASA-GF30	RED	SLIDE	2
			1	PBT/ASA-GF30	BLACK	JPT HSG., 16POS.	1
MATED WITH	AMP PART NO.	REV.	PCS	MATERIAL	COLOR	DESCRIPTION	ITEM NO.

AMP 4805 REV 31MAR2000