

PNA4611M Series (PNA4611M/4612M/4613M/4614M/4620M)

Bipolar Integrated Circuit with Photodetection Function


For infrared remote control systems

■ Features

- High sensitivity (extension distance is 11 m or more)
- External parts not required
- Resin to cutoff visible light is used
- Supports various metal holders with improved electromagnetic noise resistance

■ Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Ratings	Unit
Power supply voltage	V_{CC}	-0.5 to +7	V
Power dissipation	P_D	200	mW
Operating ambient temperature	T_{opr}	-20 to +75	°C
Storage temperature	T_{stg}	-40 to +100	°C

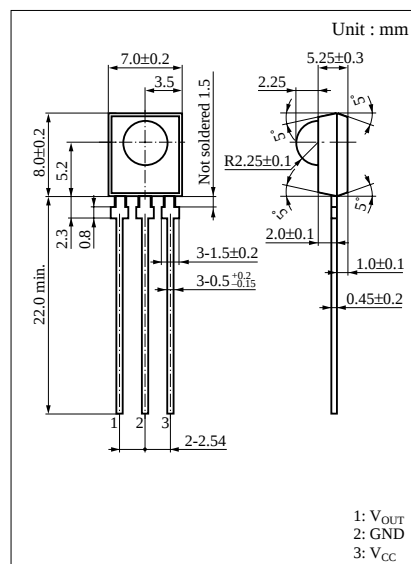

■ Main Characteristics (Ta = 25°C V_{CC} = 5V)

Parameter	Symbol	Conditions	min	typ	max	Unit
Operating supply voltage	V_{CC}		4.7	5.0	5.3	V
Current consumption	I_{CC}	Note 3	1.8	2.4	3.0	mA
Maximum reception distance	L_{max}	Note 1	11	16		m
Low-level output voltage	V_{OL}	Note 2		0.35	0.5	V
High-level output voltage	V_{OH}	Note 3	4.8	5.0	V_{CC}	V
Low-level pulse width	T_{WL}	Note 1	200	400	600	μs
High-level pulse width	T_{WH}	Note 1	200	400	600	μs
Carrier frequency	PNA4611M	f_0		36.7		kHz
	PNA4612M			38.0		
	PNA4613M			40.0		
	PNA4614M			56.9		
	PNA4620M			33.3		

Note 1) Fig.1 burst wave, $L=L_{max}$, 16 pulses

Note 2) Fig.2 continuous wave, $L \leq L_{max}$

Note 3) Light shut off condition

Carrier wave : f_0




Fig.1

Carrier wave : f_0







Fig.2

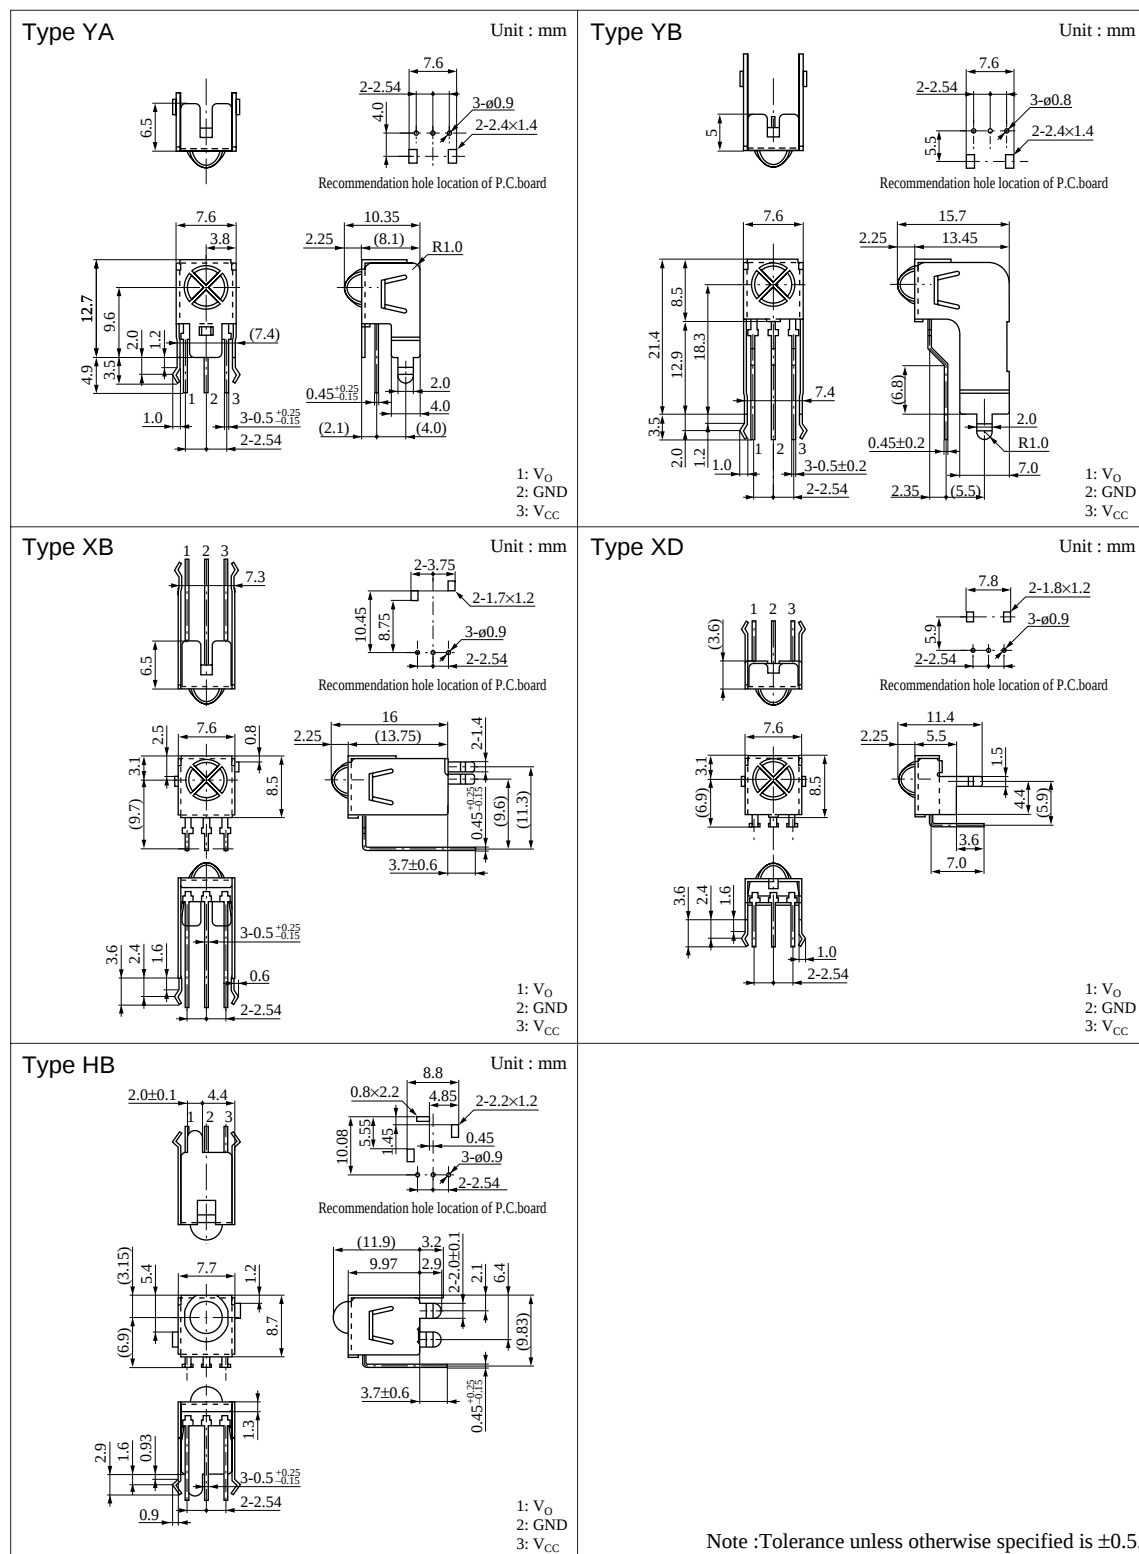




Block Diagram

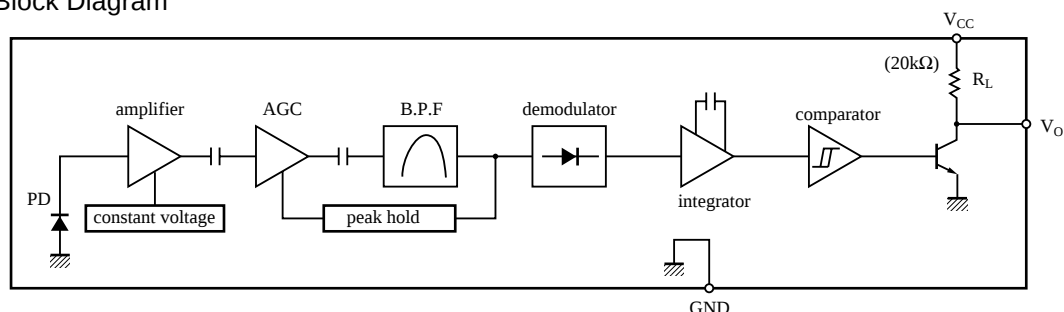

Panasonic Transmitter Specifications

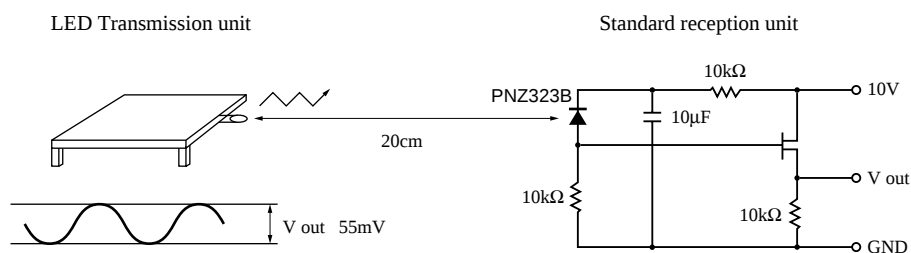

- The light output of the LED transmission unit is adjusted so that the transmission output (V_{out}) of the standard reception unit will be 55 mV when the transmission waveform (duty = 50%) is output from the LED transmission unit. Here, infrared sensitivity (SIR) of PNZ323B is 0.53 μA when emission illuminance (H) is 12.45 $\mu\text{W}/\text{cm}^2$.
- The maximum reception distance under these specifications is an assurance that T_{WH} and T_{WL} values will be within the tolerance ranges when 16 consecutive pulses of an optical output equivalent to the maximum reception distance are transmitted by the above transmission unit (The maximum reception distance is measured in the dark without external disturbance noise.)

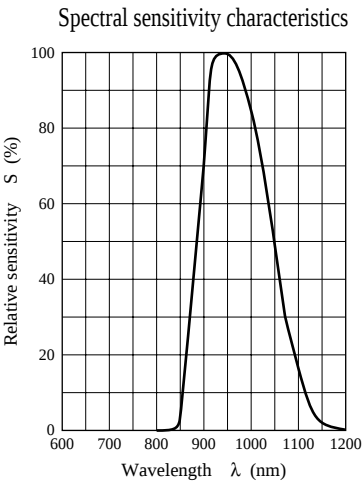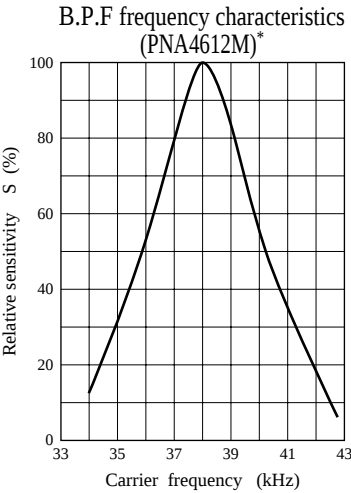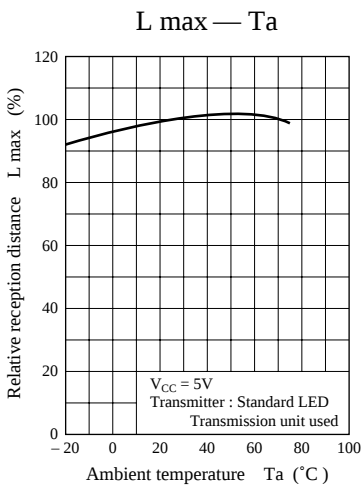

* The peaks for PNA4611M, PNA4613M, PNA4614M, and PNA4620M are all at f_0 .

