



NPN Silicon Digital Transistor


- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ($R_1=10k\Omega$)
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

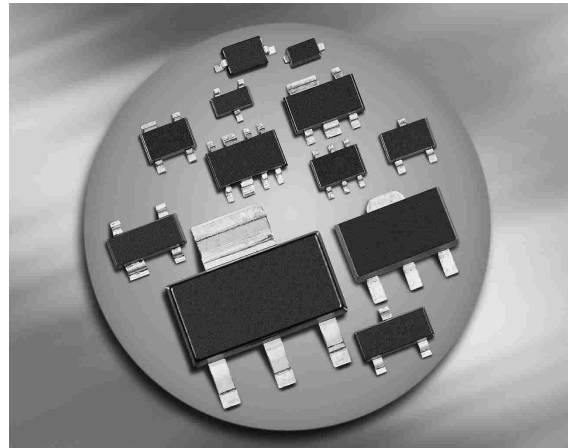

BCR129/F/L3
BCR129T/W



BCR129S
SEMH4



Type	Marking	Pin Configuration						Package
BCR129	WVs	1=B	2=E	3=C	-	-	-	SOT23
BCR129F	WVs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR129L3	WV	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR129S	WVs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR129T	WVs	1=B	2=E	3=C	-	-	-	SC75
BCR129W	WVs	1=B	2=E	3=C	-	-	-	SOT323
SEMH4	WV	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT666

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Emitter-base voltage	V_{EBO}	5	
Input on voltage	$V_{I(on)}$	20	
Collector current	I_C	100	mA
Total power dissipation- BCR129, $T_S \leq 102^\circ\text{C}$ BCR129F, $T_S \leq 128^\circ\text{C}$ BCR129L3, $T_S \leq 135^\circ\text{C}$ BCR129S, $T_S \leq 115^\circ\text{C}$ BCR129T, $T_S \leq 109^\circ\text{C}$ BCR129W, $T_S \leq 124^\circ\text{C}$ SEMH4, $T_S \leq 75^\circ\text{C}$	P_{tot}	200 250 250 250 250 250 250	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BCR129		≤ 240	
BCR129F		≤ 90	
BCR129L3		≤ 60	
BCR129S		≤ 140	
BCR129T		≤ 165	
BCR129W		≤ 105	
SEMH4		≤ 300	

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 100\ \mu\text{A}$, $I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10\ \mu\text{A}$, $I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10\ \mu\text{A}$, $I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector-base cutoff current $V_{\text{CB}} = 40\ \text{V}$, $I_E = 0$	I_{CBO}	-	-	100	nA
DC current gain ¹⁾ $I_C = 5\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$	h_{FE}	120	-	630	-
Collector-emitter saturation voltage ¹⁾ $I_C = 10\ \text{mA}$, $I_B = 0.5\ \text{mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100\ \mu\text{A}$, $V_{\text{CE}} = 5\ \text{V}$	$V_{\text{i(off)}}$	0.4	-	1	
Input on voltage $I_C = 2\ \text{mA}$, $V_{\text{CE}} = 0.3\ \text{V}$	$V_{\text{i(on)}}$	0.5	-	1.1	
Input resistor	R_1	7	10	13	kΩ
AC Characteristics					
Transition frequency $I_C = 10\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$, $f = 100\ \text{MHz}$	f_{T}	-	150	-	MHz
Collector-base capacitance $V_{\text{CB}} = 10\ \text{V}$, $f = 1\ \text{MHz}$	C_{cb}	-	3	-	pF

¹⁾Pulse test: $t < 300\ \mu\text{s}$; $D < 2\%$


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5 \text{ V}$ (common emitter configuration)

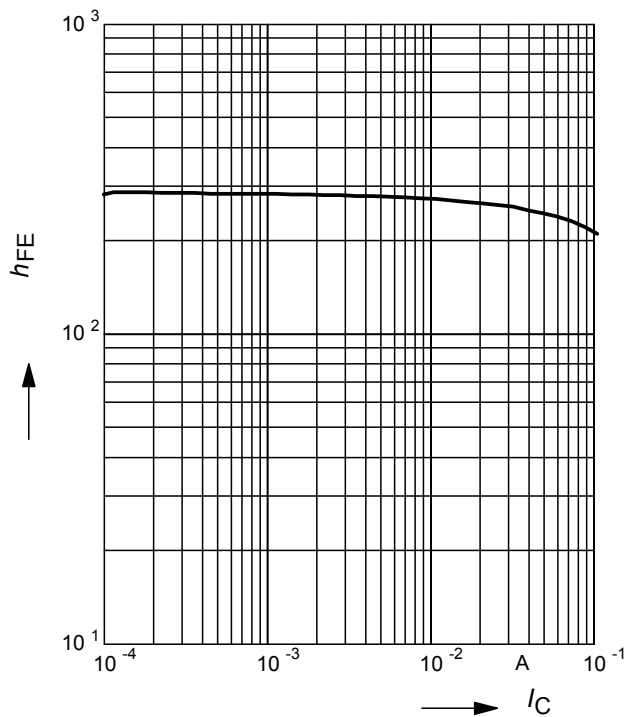


Collector-emitter saturation voltage

$V_{CEsat} = f(I_C), h_{FE} = 20$

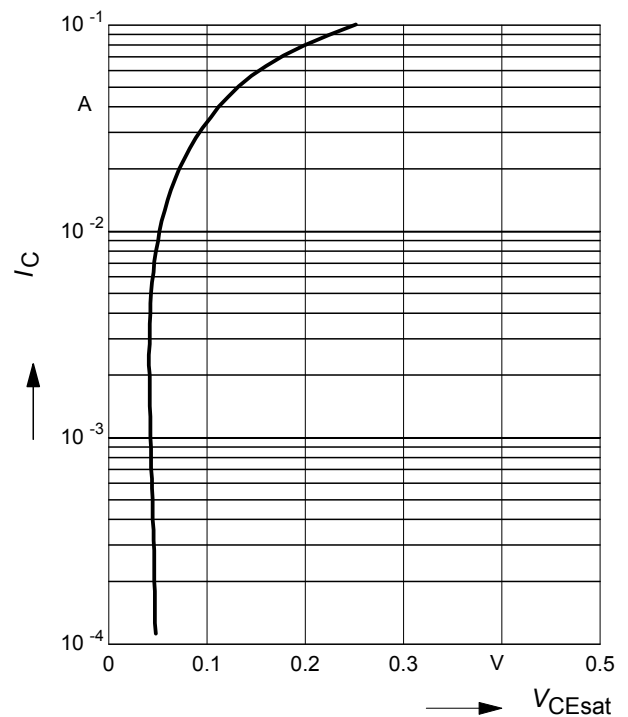


Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3 \text{ V}$ (common emitter configuration)

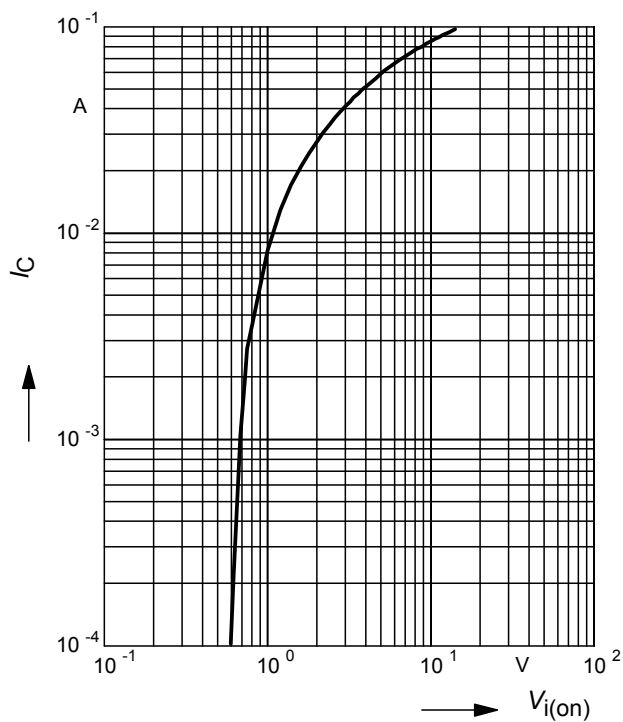


Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5 \text{ V}$ (common emitter configuration)

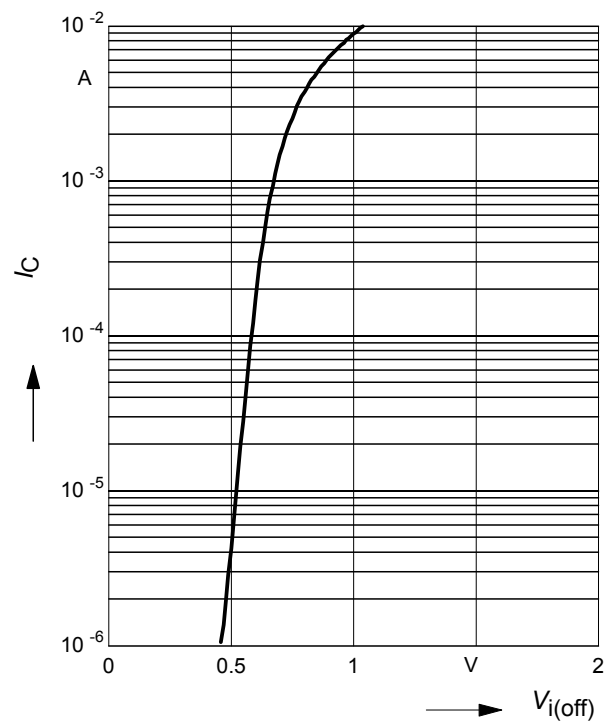


Total power dissipation $P_{\text{tot}} = f(T_S)$

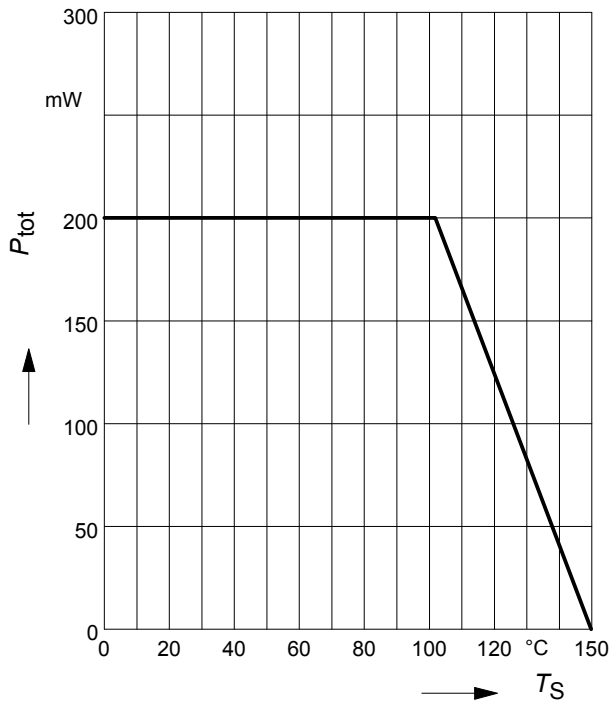


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR129F

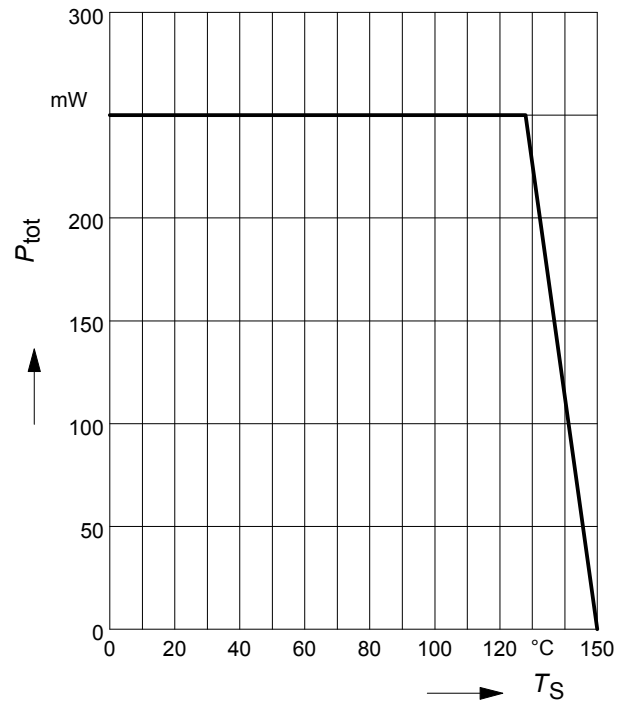


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR129L3

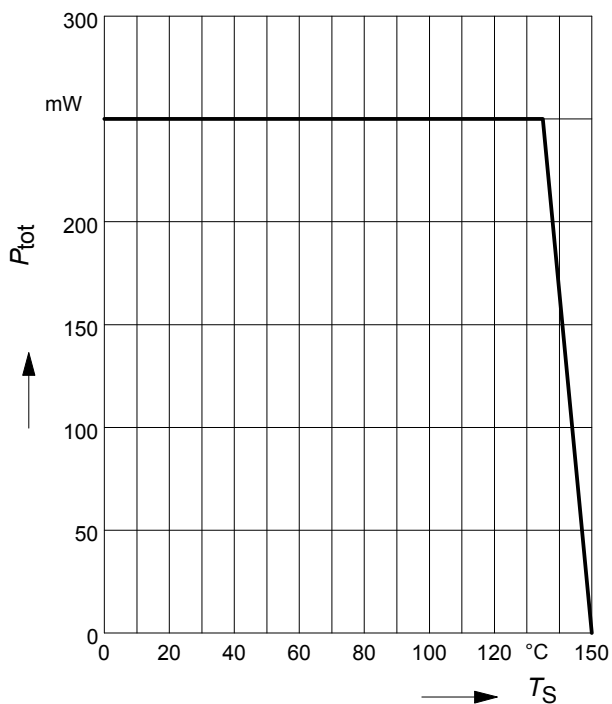


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR129S

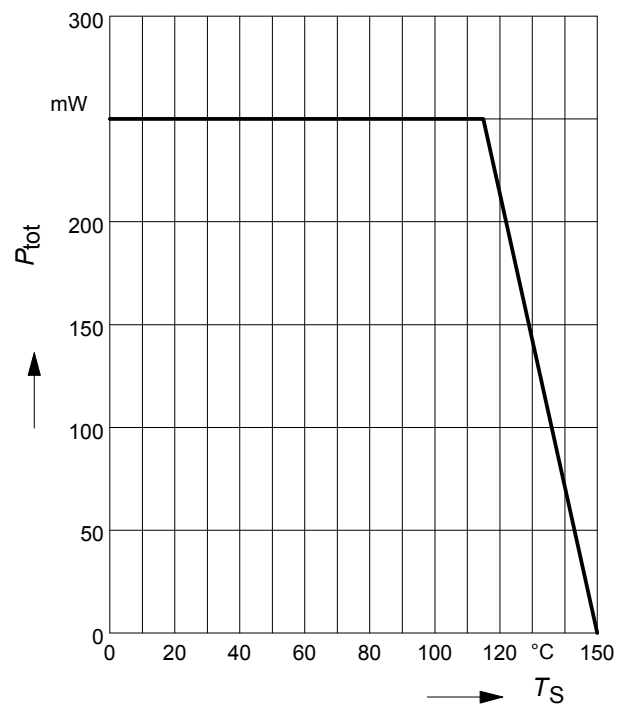


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR129T

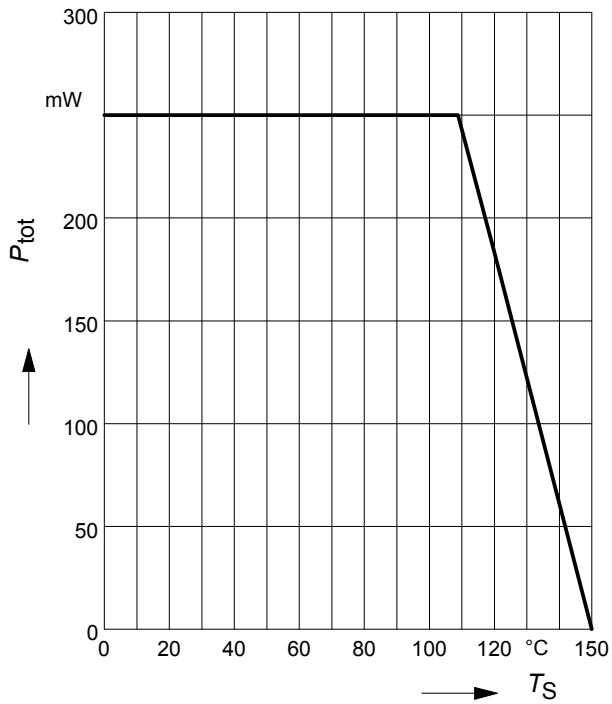


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR129W

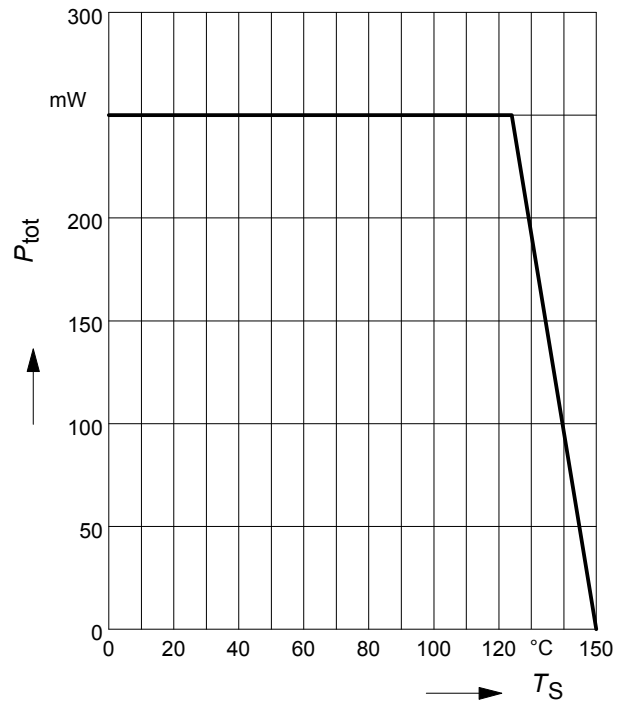


Total power dissipation $P_{\text{tot}} = f(T_S)$

SEMH4

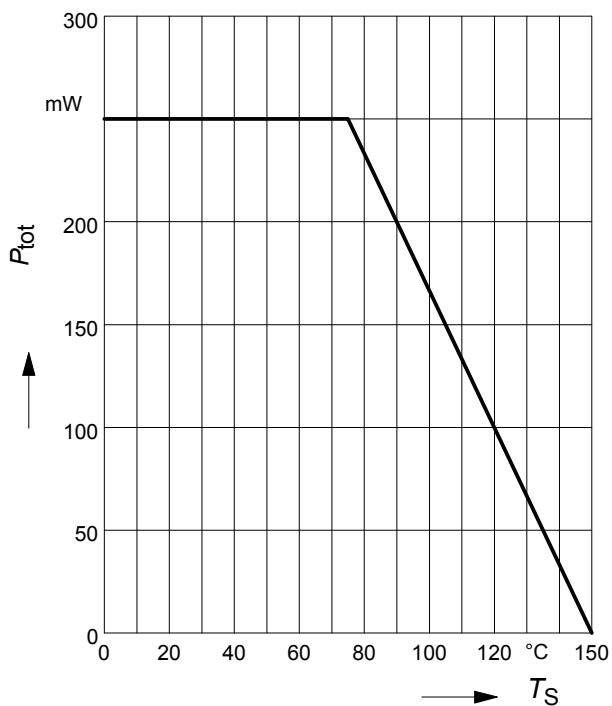

Permissible Pulse Load $R_{thJS} = f(t_p)$


BCR129

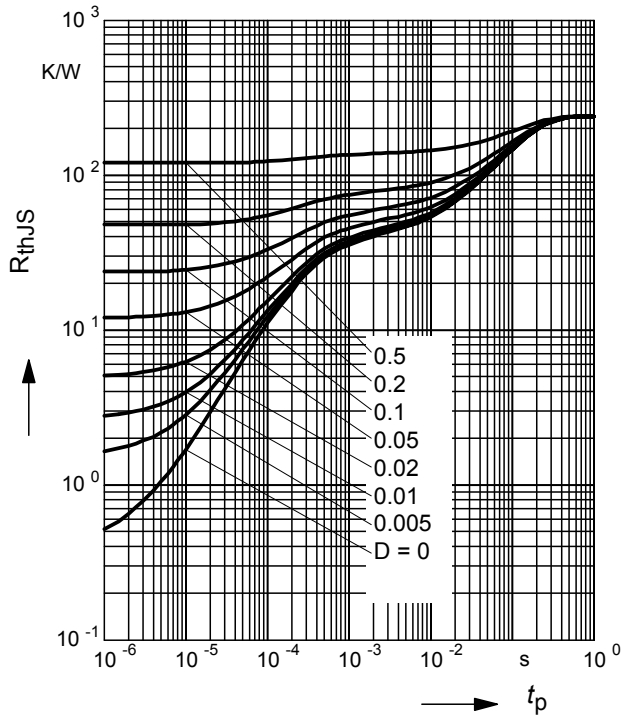

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129

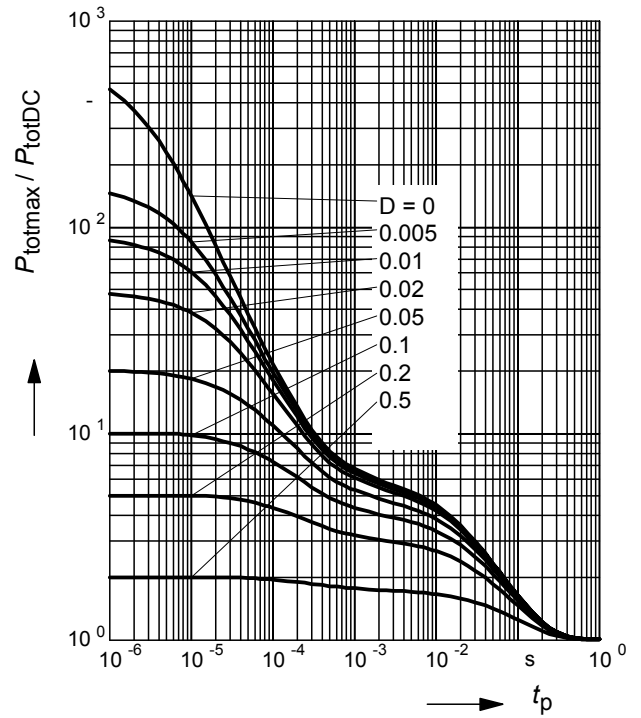

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR129F

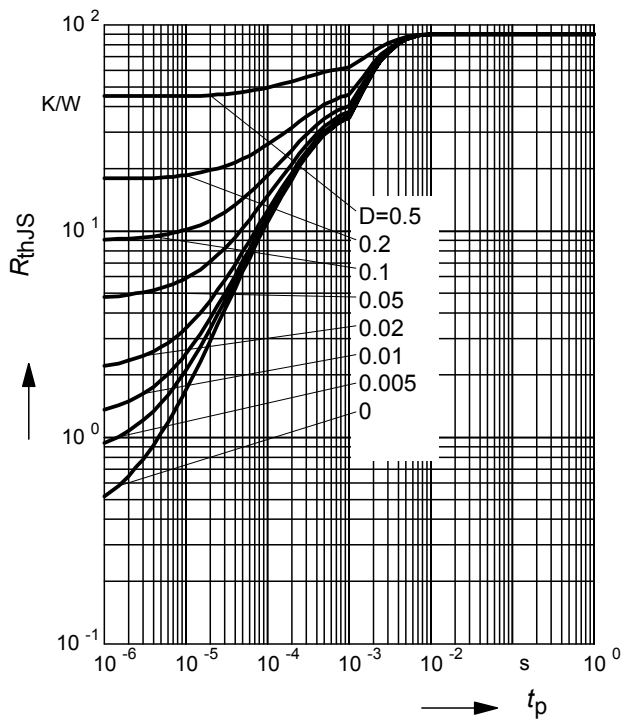

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129F

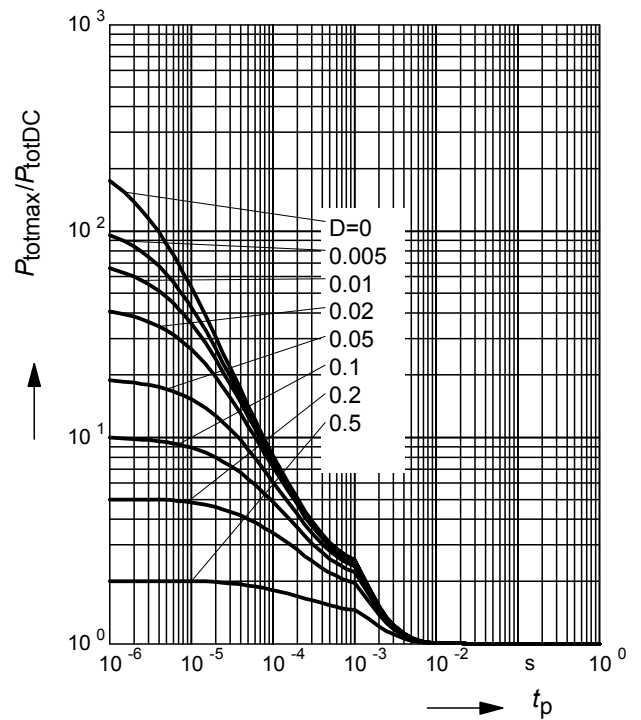

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR129L3

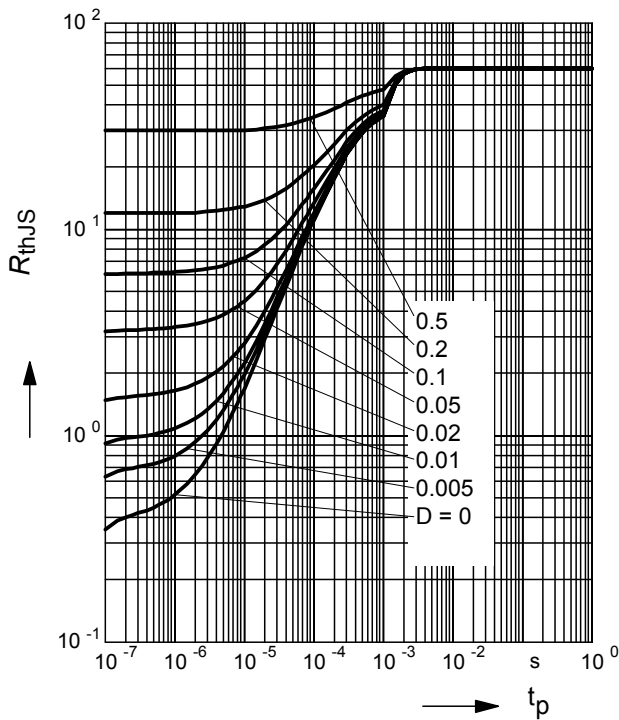

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129L3

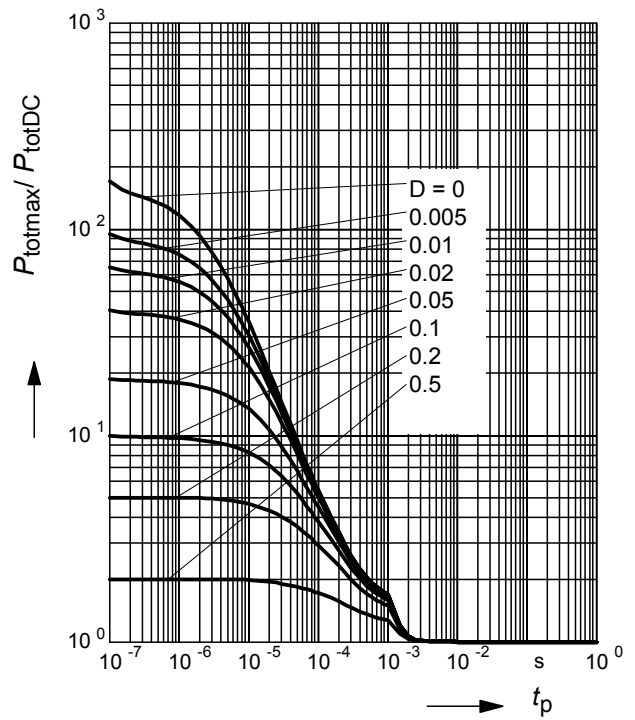

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR129S

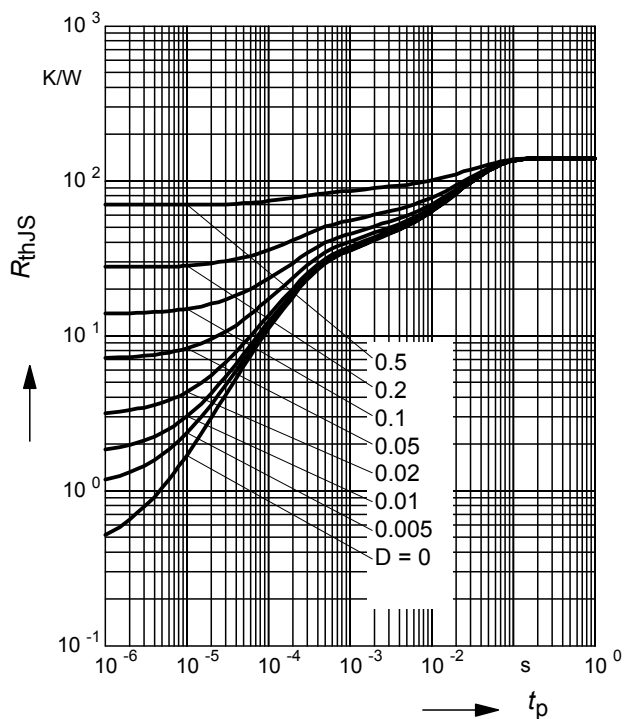

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129S

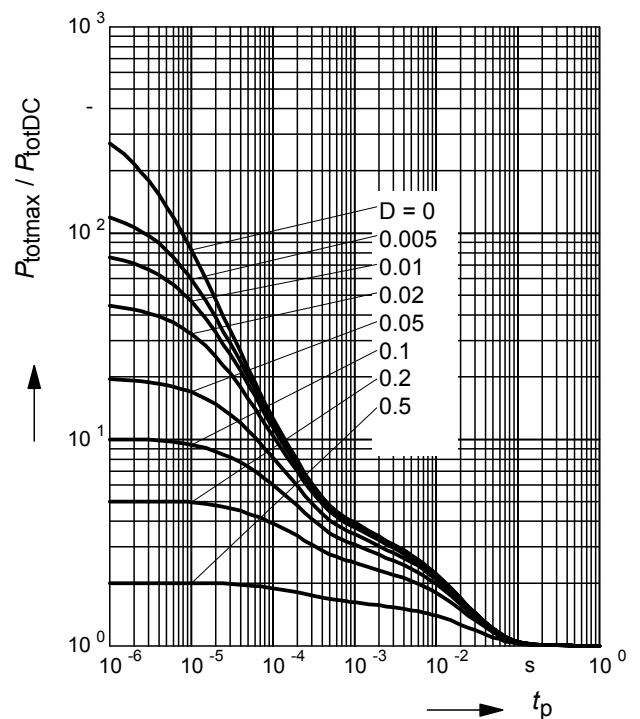

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR129T

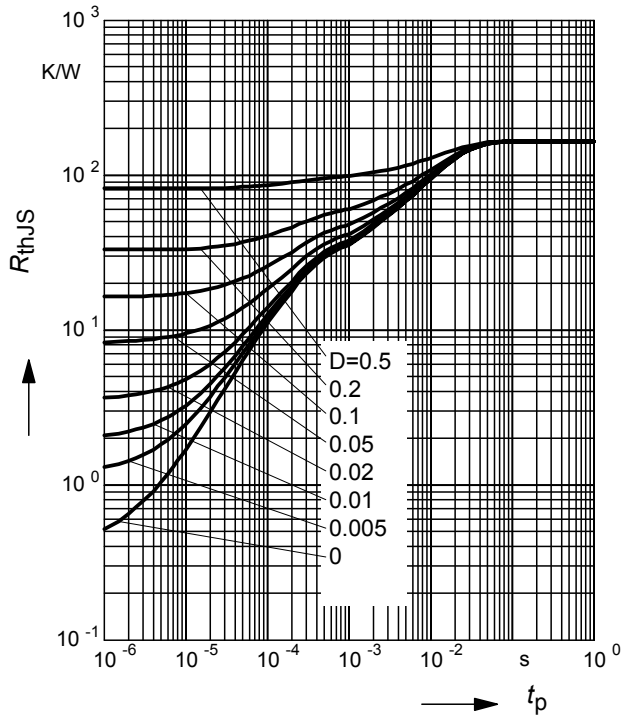

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129T

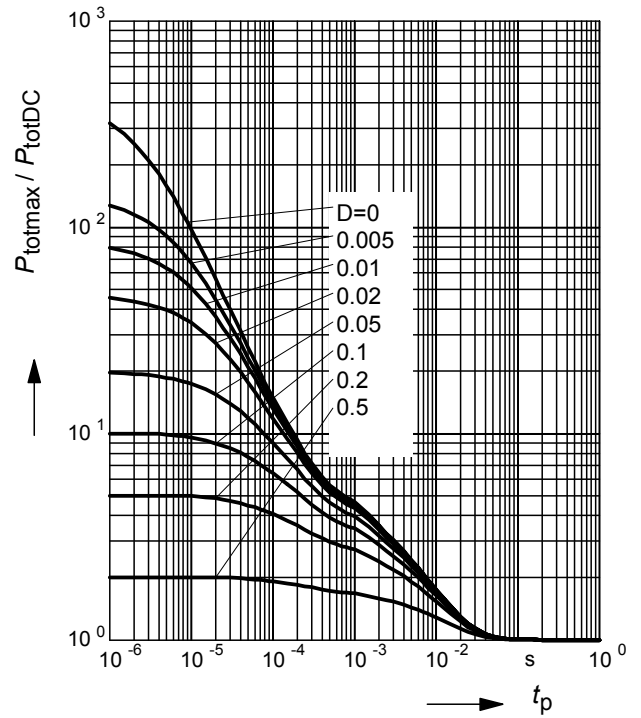

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR129W

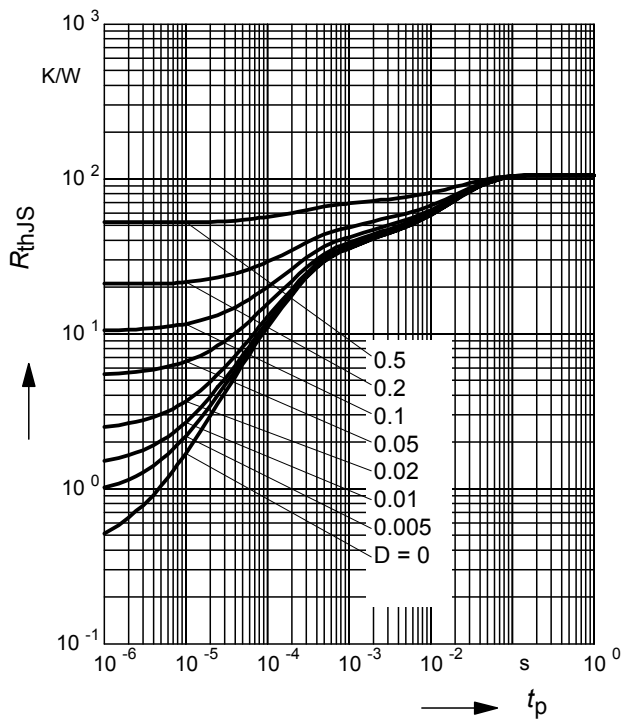

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR129W

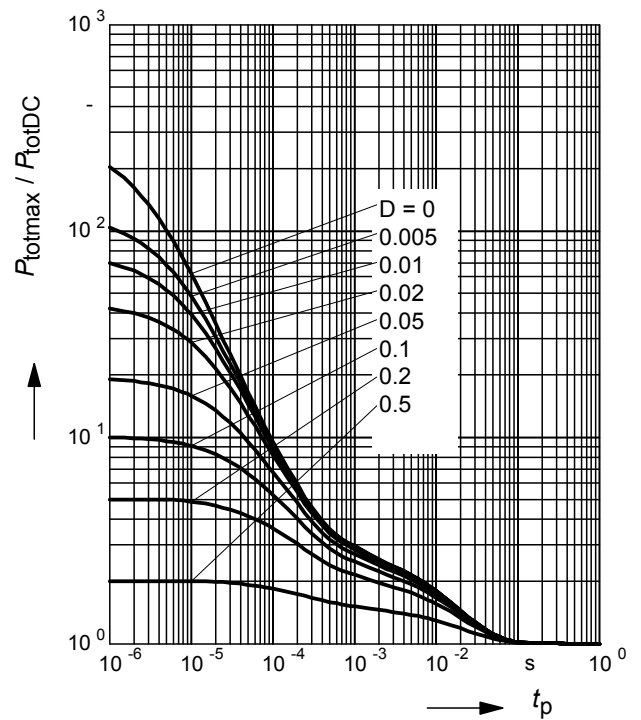

Permissible Puls Load $R_{thJS} = f(t_p)$

SEMH4

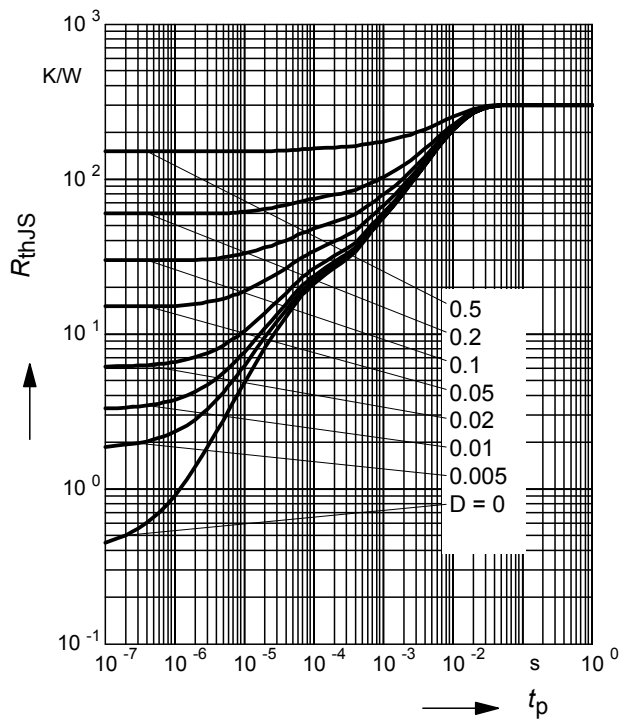

Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

SEMH4

