
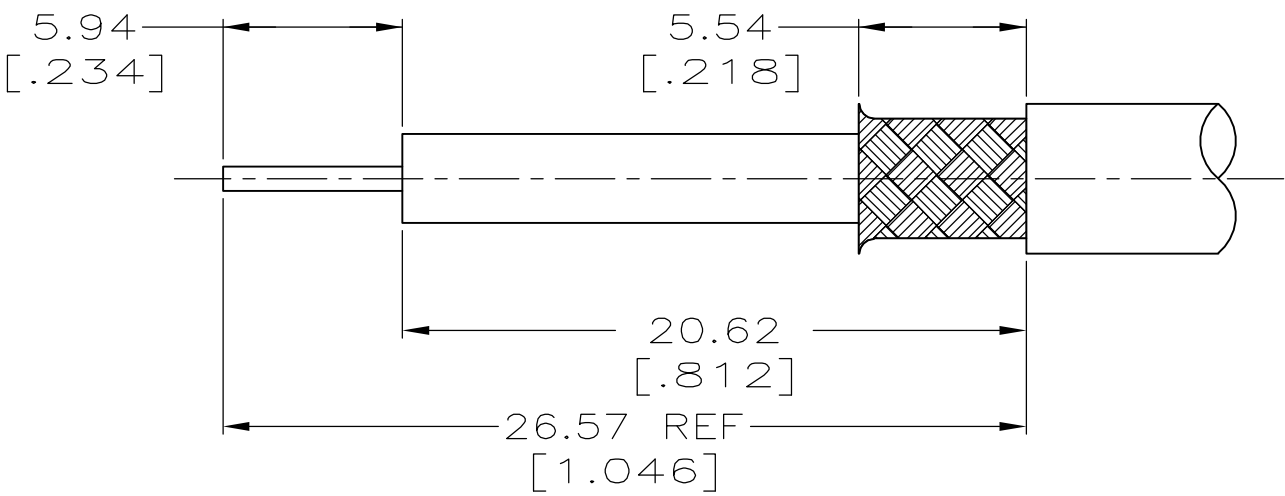


1 . USE INSTRUCTION SHEET 9821

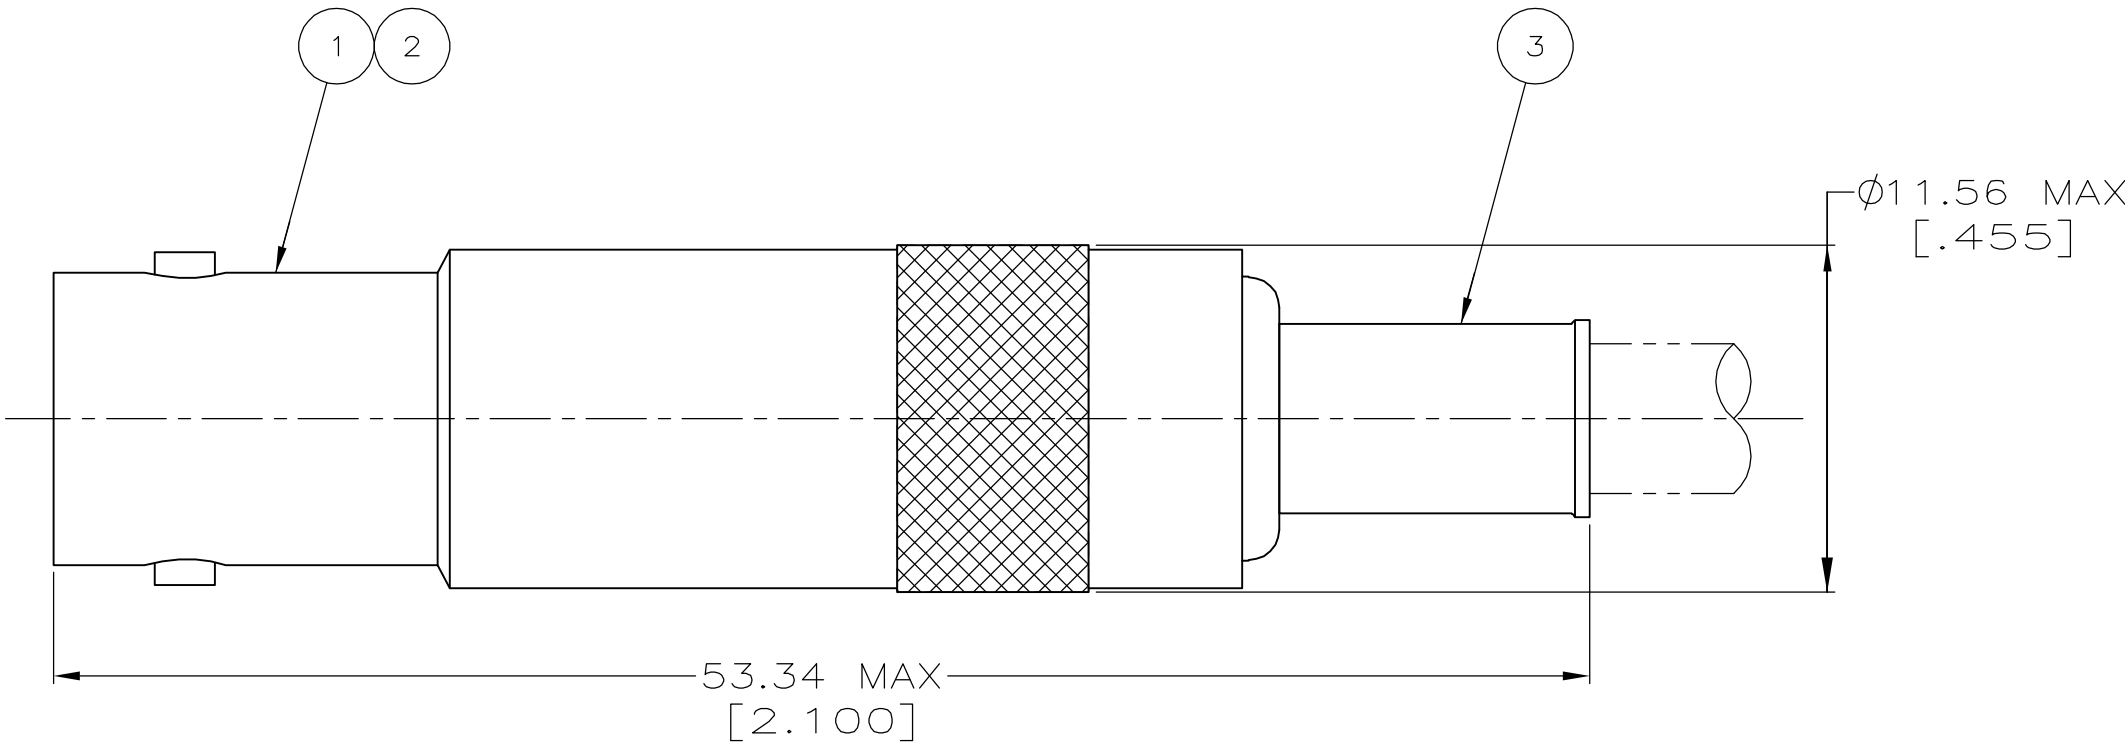

RECOMMENDED STRIP LENGTH

RG-59/U, 59A/U, 59B/U, 62/U, 62A/U, 62B/U		220022-2	9-50428-0	225057-2	225096-4	5225087-5	
FOR USE WITH CABLE		HAND TOOL	③ FERRULE QTY=1	② CONTACT QTY=1	① JACK ASSEMBLY QTY=1	PART NUMBER	
			THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN31JAN2005 A. FERNANDEZ-DOCK5 CHK31JAN2005 J. HAVENER APVD31JAN2005 J. LIPPERT PRODUCT SPEC — APPLICATION SPEC — WEIGHT— CUSTOMER DRAWING tyco Tyco Electronics Corporation Harrisburg, PA 17105-3608 JACK, STANDARD HIGH VOLTAGE — — SIZECAGE CODEDRAWING NORESTRICTED TO A200779C=5225087—		
			DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:			
				0 PLC ± — 1 PLC ± — 2 PLC ± 0.41 [0.016] 3 PLC ± — 4 PLC ± — ANGLES ± —	JACK, STANDARD HIGH VOLTAGE		
			MATERIAL —	FINISH —	—		
			SCALE 4:1		SHEET 1 OF 1	REV 0	