


0225077



- According to VDE 0413
- For single- and 3-phase AC-voltage systems
- Adjustable response value R_{AN} from 10 ... 80 k Ω
- Without auxiliary supply
- Closed circuit operation
- Programmable for:
 - manual reset (bridge LT1-LT2)
 - automatic reset (without bridge)
- External reset button on LT1-LT2
- Test button to check the function of the device
- External test button can be connected to PT1-PT2
- 1 changeover contact
- Width 45 mm

Function diagram

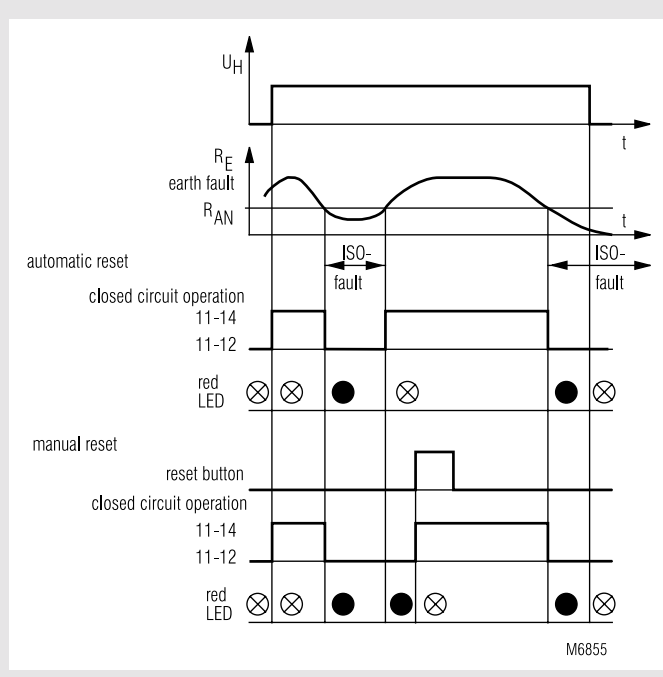

Approvals and marking



Applications

Monitoring of the resistance to earth in ungrounded single- and 3-phase-voltage systems.

Technical data

Measuring circuit

Nominal voltage U_N:	AC 24, 42, 110, 127, 230, 400, 415, 500 V
Voltage range:	0,8 ... 1,1 U_N
Frequency range:	45 ... 400 Hz
Response value R_{AN}:	10 ... 80 k Ω
Setting R_{AN}:	infinite variable with screwdriver
Internal test resistor:	equivalent to earth resistance of < 10 k Ω
Internal AC resistance:	> 200 k Ω
Internal DC resistance:	> 200 k Ω
Measuring voltage:	DC 18 V
Max. measuring current ($R_E = 0$):	< 0,1 mA
Max. permissible noise	
DC voltage:	DC 242 V
Operate delay	
at $R_{AN} = 50$ k Ω , $CE = 1$ μ F	
R_E from ∞ to 0,9 R_{AN} :	< 4,2 s
R_E from ∞ to 0 k Ω :	approx. 2 s
Hysteresis	
at $R_{AN} = 50$ k Ω :	approx. 50 %
Measuring error	
at $R_{AN} = 50$ k Ω :	< 15 %
Nominal consumption:	ambient temperature -5 ... 50°C, within the permitted voltage range
Phase failure bridging:	approx. 2,5 VA
	> 25 ms

Output

Contacts:	1 changeover contact		
Max. switching voltage:	AC 400 V		
Thermal current I_{th}:	5 A		
Switching capacity			
to AC 15:	5 A / AC 230 V		EN 60 947-5-1
Short circuit strength			
max. fuse rating:	5 A gL		EN 60 947-5-1

Technical data

General data

Operating mode:	Continuous operation	
Permissible ambient and stocking temperature:	- 20 ... + 60°C / - 25 ... + 70°C	
Clearance and creepage distances		
overvoltage category / contamination level:	4 kV / 2	IEC 60 664-1
EMC		
Electrostatic discharge:	8 kV (air)	EN 61 000-4-2
Fast transients:	2 kV	EN 61 000-4-4
Surge voltages between wires for power supply:	2 kV	EN 61 000-4-5
between wire and ground:	4 kV	EN 61 000-4-5
Interference suppression:	Limit value class B	EN 55 011
Degree of protection:	Housing: IP 40	EN 60 529
	Terminals: IP 20	EN 60 529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0,35 mm frequency 10 ... 55 Hz	
	20 / 060 / 04	EN 60 068-1
Climate resistance:	EN 50 005	
Terminal designation:	EN 50 005	
Wire connection:	2 x 2,5 mm ² solid or 2 x 1,5 mm ² stranded wire	
	DIN 46 228-1/-2/-3/-4	
Wire fixing:	Flat terminals with self-lifting clamping piece	
		EN 60 999
Mounting:	DIN rail	
Weight:	220 g	
	EN 50 022	

Dimensions

Width x height x depth: 45 x 77 x 115 mm

Standard type

AI 897 AC 230 V		
Article number:	0001037	stock item
• Nominal voltage U_N :	AC 230 V	
• Settable response value R_{AN} :	10 ... 80 kΩ	
• Width:	45 mm	


Variant

AI 897.07:	fixed response value between 10 and 80 kΩ, with internal test and reset button, LED indicator for earth fault
------------	---

Ordering example for Variant


AI 897	.07	AC 500 V	50 kΩ	
				Response value
				Nominal voltage
				Variant, if required
				Type

Connection example

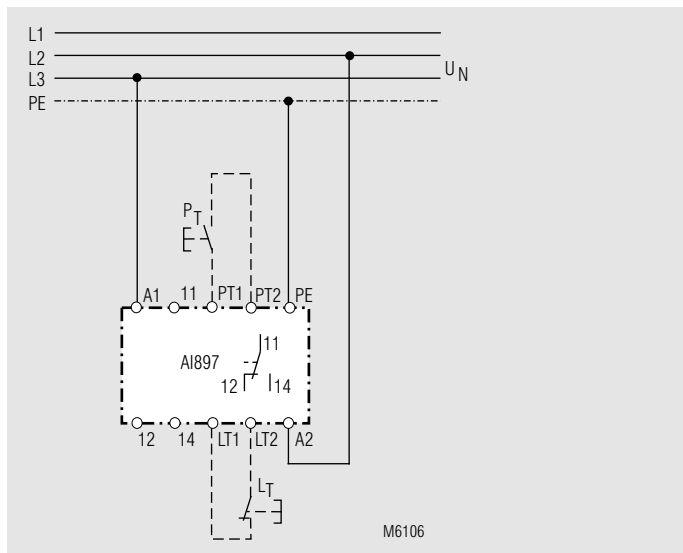

Connection example AI 897

A1/A2: $U_N = U_H$
 Bridge LT1/LT2: manual reset
 without Bridge LT1/LT2: automatic reset

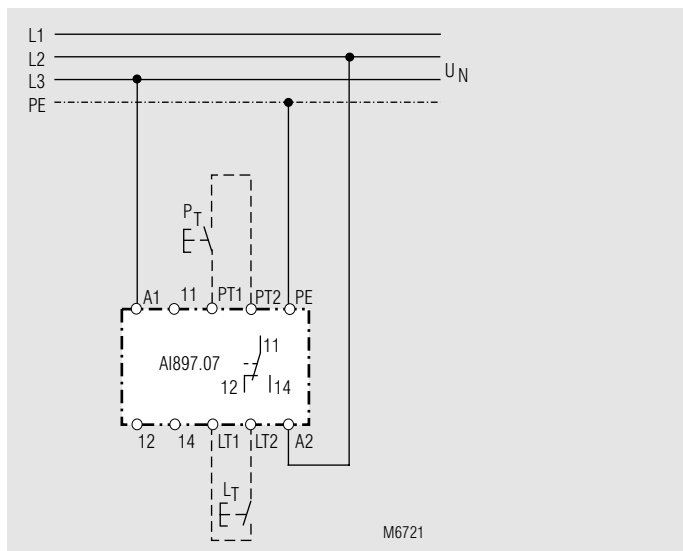

Connection example AI 897.07

A1/A2: $U_N = U_H$
 Bridge LT1/LT2: automatic reset
 without Bridge LT1/LT2: manual reset