



LOC	DIST	REVISIONS				
AJ	16	P	LTR	DESCRIPTION	DATE	DWN
			D	REVISED PER ECO-05-013873	16NOV05	BM
						APVD
						JL

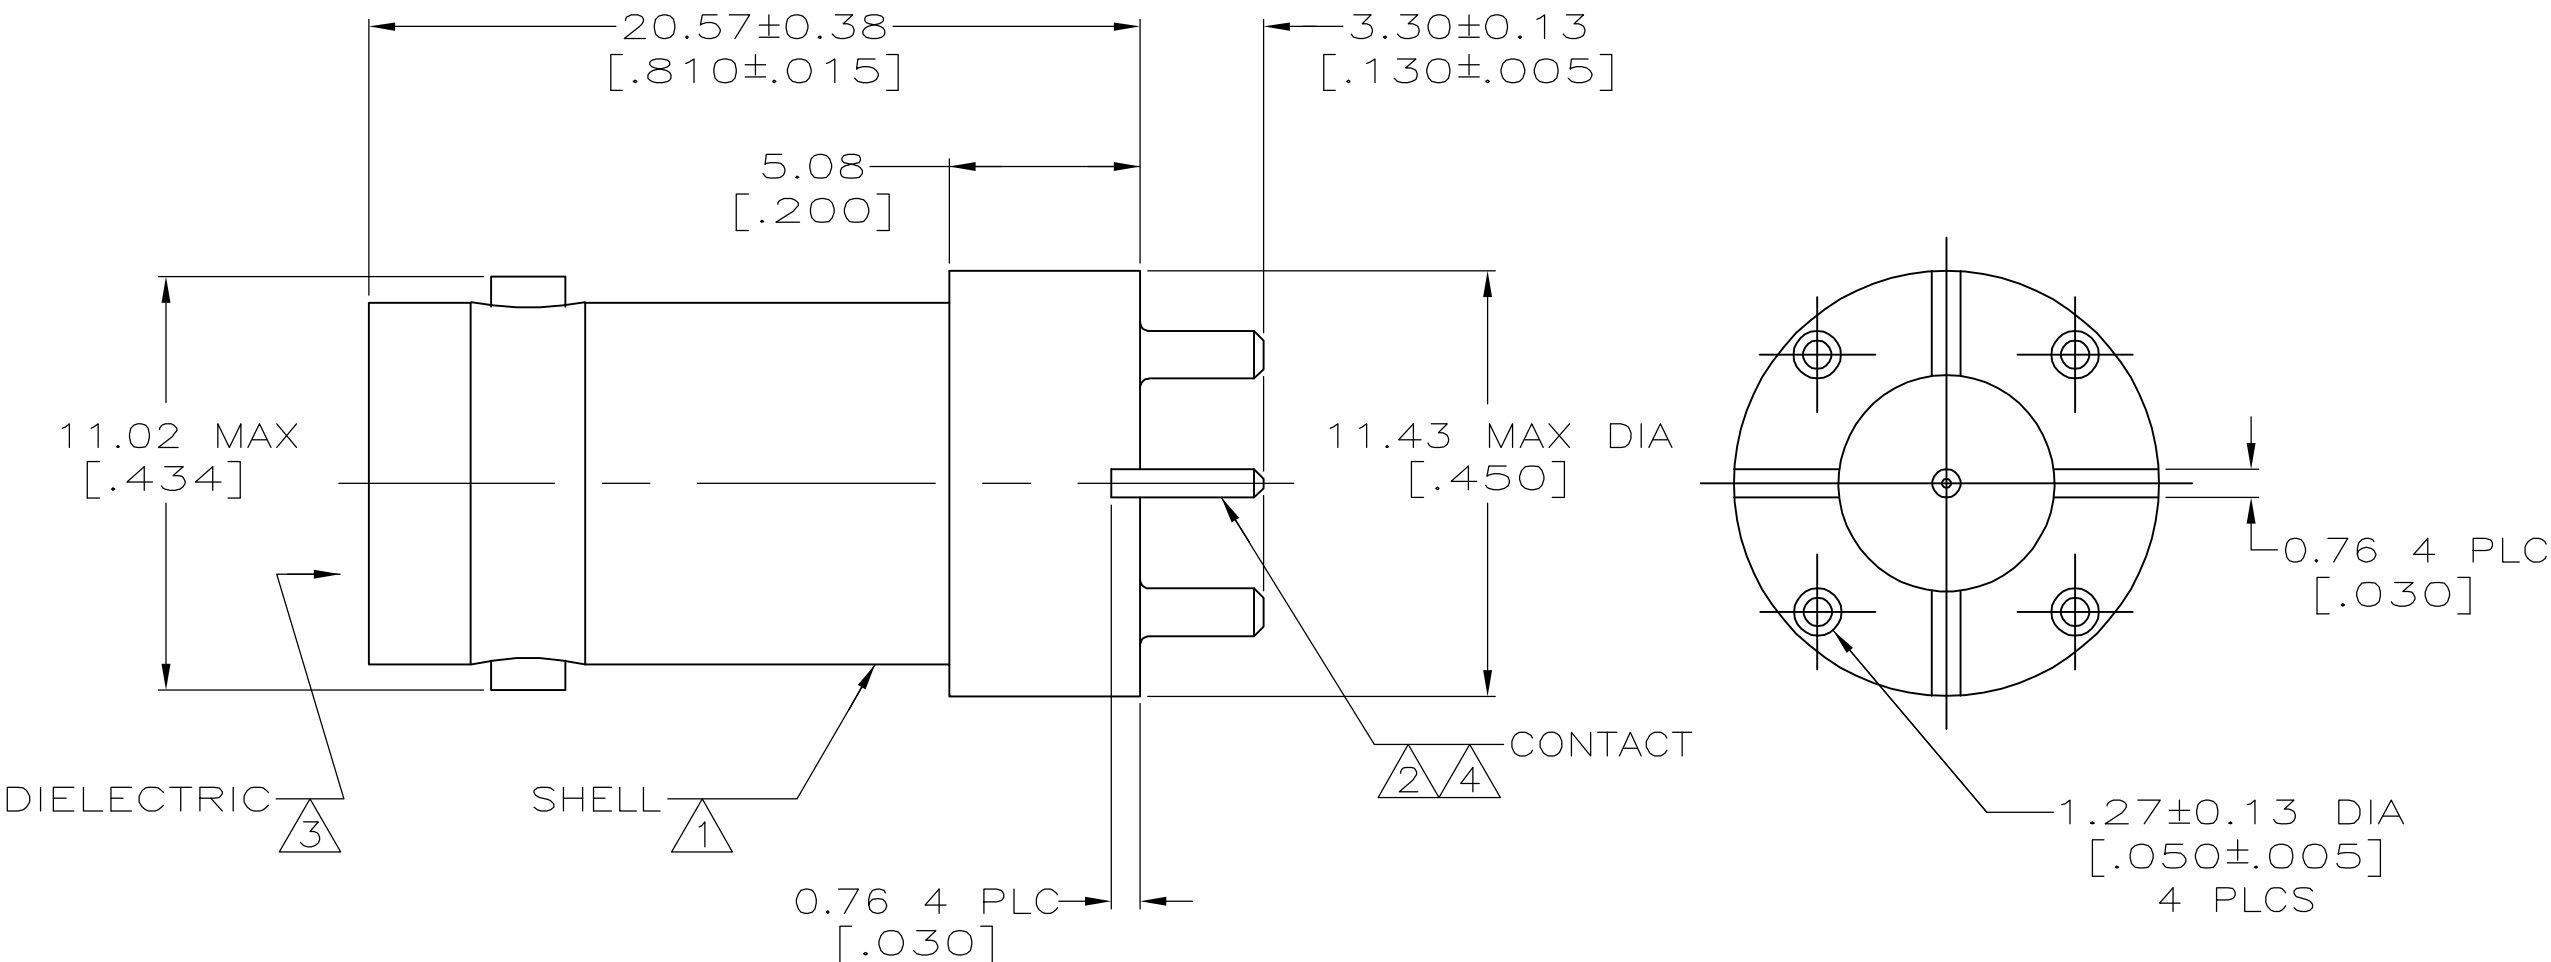

- 1 ZINC PER QQ-Z-363
- 2 BERYLLIUM COPPER PER ASTM-B-196
- 3 PTFE PER MIL-P-19468
- 4 GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 5 TIN-LEAD PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
- 6 NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.
- 7. SEE INSTRUCTION SHEET 408-9889.

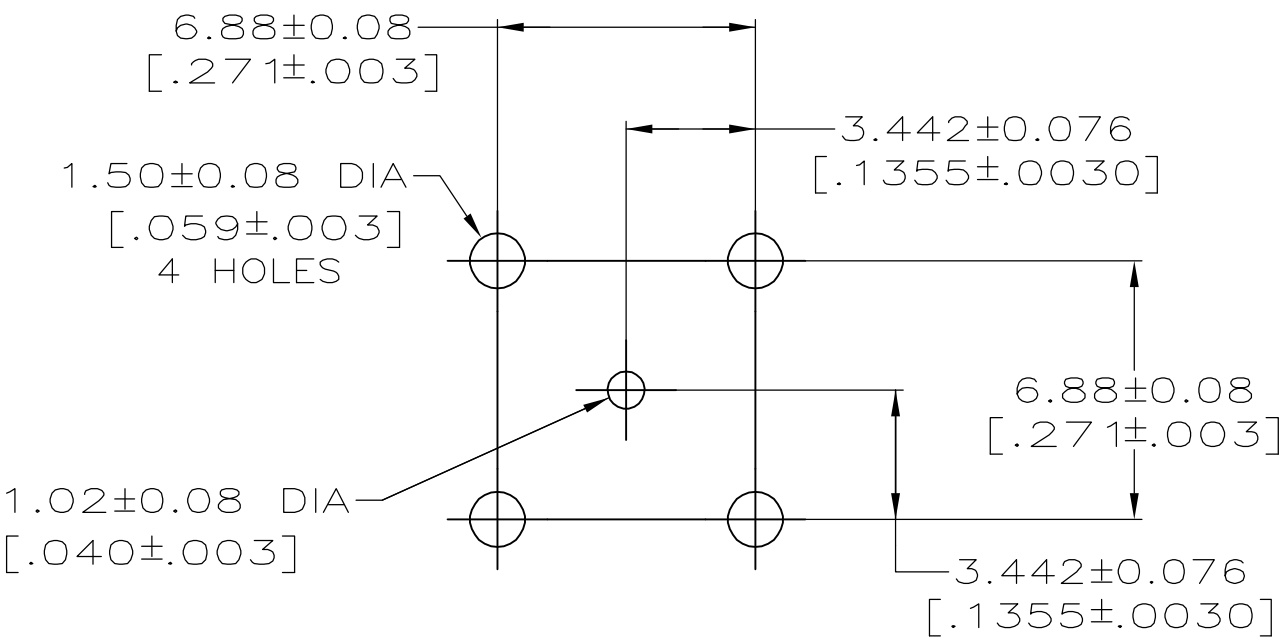

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. LIPPERT	1-19-99	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK	J. LIPPERT	3-11-99				
		APVD	J. LIPPERT	3-11-99	NAME			
		PRODUCT SPEC			JACK, VERTICAL, PCB, 75 OHM, COMMERCIAL BNC			
MATERIAL		APPLICATION SPEC			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE NOTES 1 - 3		FINISH			A2	00779	C=1274291	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT			SCALE			
0 PLC ± -		RESTRICTED CUSTOMER			5:1			
1 PLC ± -		SHEET			1 of 1			
2 PLC ± 0.20 [.008]		REV			D			
3 PLC ± -								
4 PLC ± -								
ANGLES ± -								