

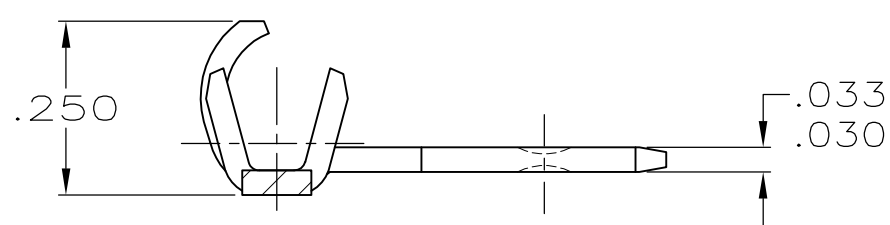
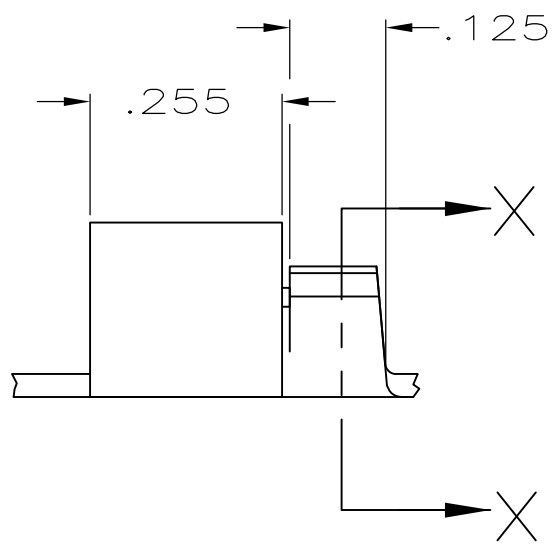


LOC		DIST		REVISIONS				
AF	50	P	LTR	DESCRIPTION		DATE	DWN	APVD
			L	REVISED PER ECR-13-011489		06DEC2013	KH	PD

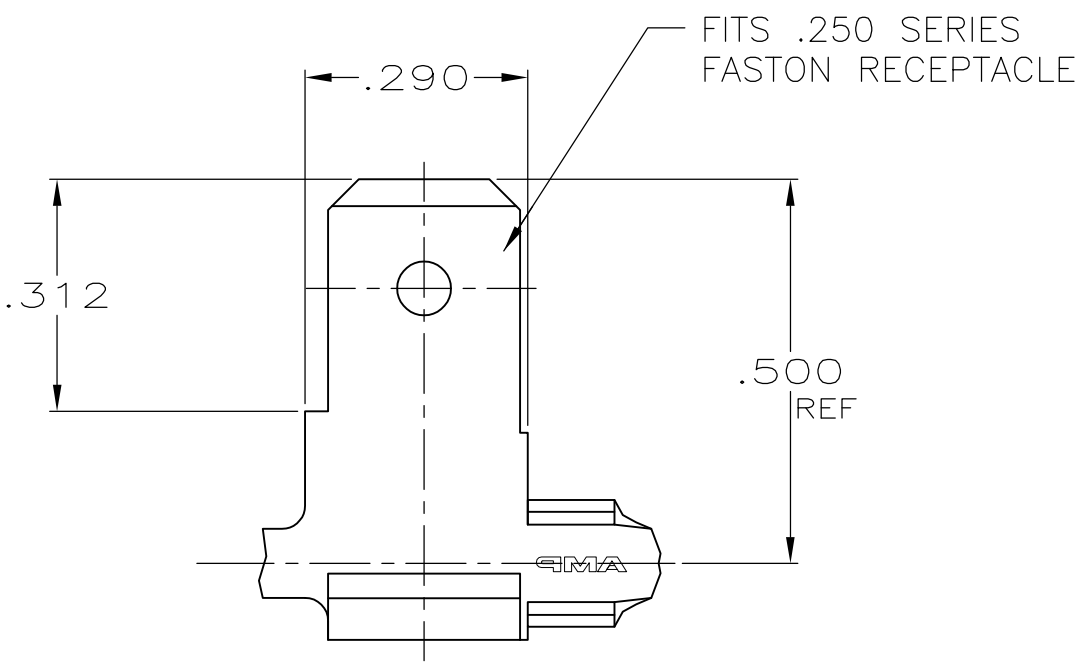

- 1 CONTINUOUS STRIP ON REELS.
- 2 REVERSE REEL OF 42770-2.
- 3 WIRE RANGE IS #18-#14.
- 4 INSULATION RANGE IS .080-.125 DIA.
- 5 REELED WITH INTERLEAVING PAPER.
- 6 PRELIMINARY — NOT FOR PRODUCTION.
- 7 PREPRODUCTION — FASR REQUIRED.

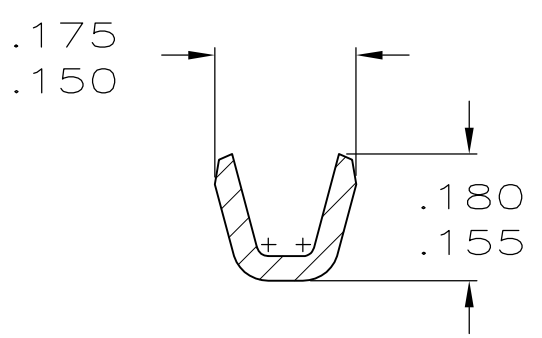

SECTION X-X

OBSOLETE	TIN PLATE	7	42770-4	5
	TIN PLATE	2	42770-3	
	TIN PLATE		42770-2	
	—	6	42770-1	
	FINISH		PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

BRASS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± .015
4 PLC ± —
ANGLES ± —

FINISH

TIN

DWN
M.S. FEHER
18MAR2005

CHK
K.A. RANDOLPH
18MAR2005

APVD
K.A. RANDOLPH
18MAR2005

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

TE Connectivity

NAME

TAB, FASTON, FLAG,
.250 SERIES
—

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-42770

—

CUSTOMER DRAWING

SCALE
4:1

SHEET
1 OF 1

REV
L

1470-19 (3/11)