




- Modular contacts for use on .100" grid, available in eight heights from .137" to .295", supplied in single and double row contact strips.
- Precision machined piston / base and gold plated components assure a 100,000 min. cycle life.
- Pistons have a long stroke relative to the low profile of the assembly.
- Low resistance, high current contacts are rated at 2 amps continuous, 3 amps peak.
- High temperature thermoplastic insulators are suitable for surface mount processes.
- A typical application would be as the base unit (battery/charger) interface for portable equipment such as mobile phones/radios, bar code readers, medical and test instruments.

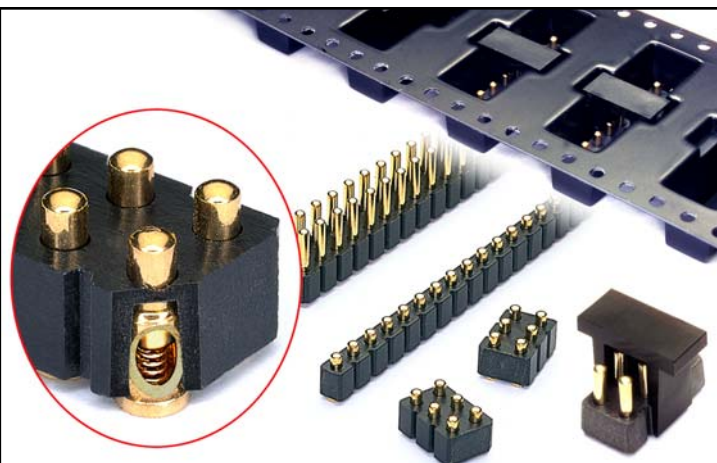

SINGLE ROW Series 811

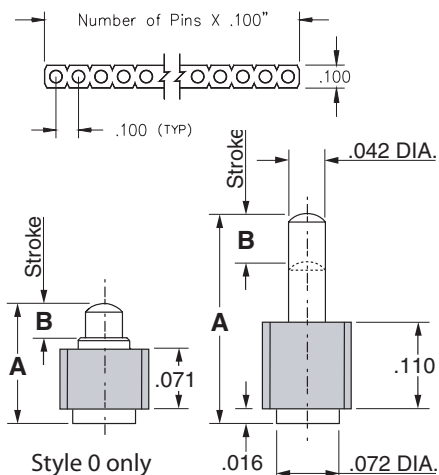

DOUBLE ROW Series 813

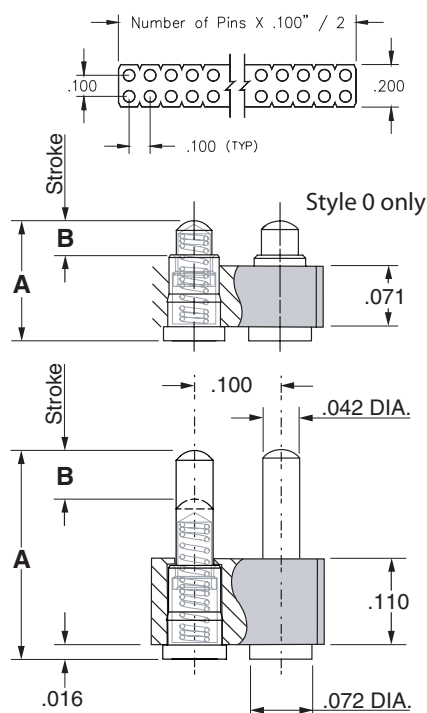

Ordering Information

Single Row Series 811

811-22-0XX-30-00X-101

Specify # of contacts

Specify contact style 0-7

01-64

Double Row Series 813

813-22-0XX-30-00X-101

Specify # of contacts

Specify contact style 0-7

04-72

CONTACT STYLE	INITIAL HEIGHT A	STROKE B
0	.137	.039
1	.177	.055
2	.197	.055
3	.217	.055
4	.236	.055
5	.256	.055
6	.276	.055
7	.295	.055

Technical Specifications

Materials:

Contact piston & Base: Machined copper alloy plated 20μ" gold over 100μ" nickel

Spring: Beryllium copper plated 10μ" gold

Insulator: High temp. thermoplastic rated UL94 V-0

Mechanical:

Spring force @ initial height (A): 25 grams

Spring force @ mid stroke (B/2): 60 grams

Spring force @ full stroke (B): 95 grams

Durability: 100,000 cycles min.

Electrical:

Voltage rating: 100Vrms/150Vdc

Current rating: 2A (continuous), 3A (peak) per contact

Contact resistance: 20mΩ max.

Insulation resistance: 10,000MΩ min.

Dielectric strength: 700Vrms min.


Capacitance: 1pF max.

Ordering Information for Series 811/813 in Carrier Tape

Single Row Series 811

811-22-00X-30-00X-191


Specify # of contacts → 2-8
Specify contact style 1-7

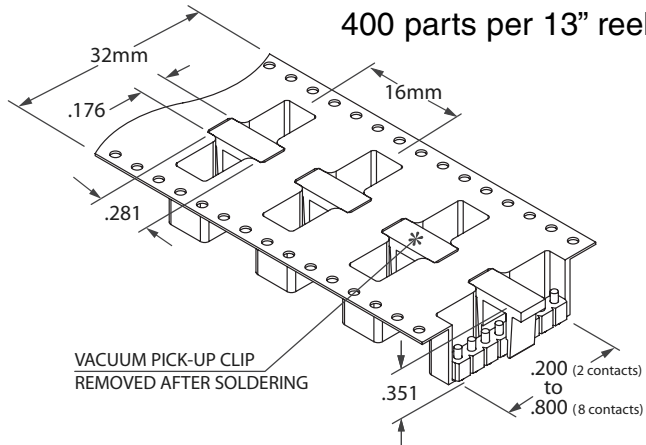


Double Row Series 813

813-22-0XX-30-00X-191

Specify # of contacts → 04-16
Specify contact style 1-7

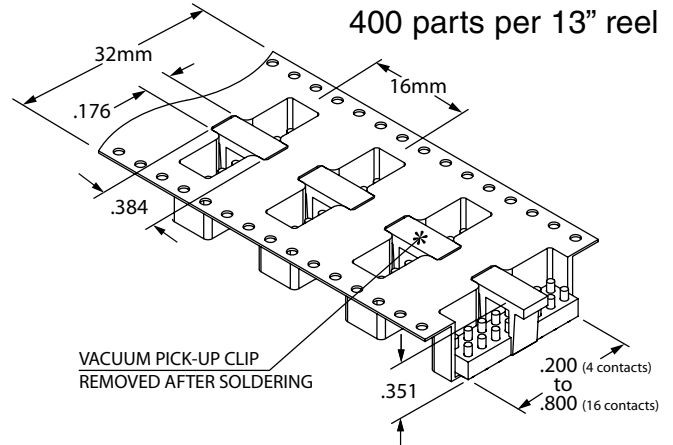

The versatility of spring loaded contacts

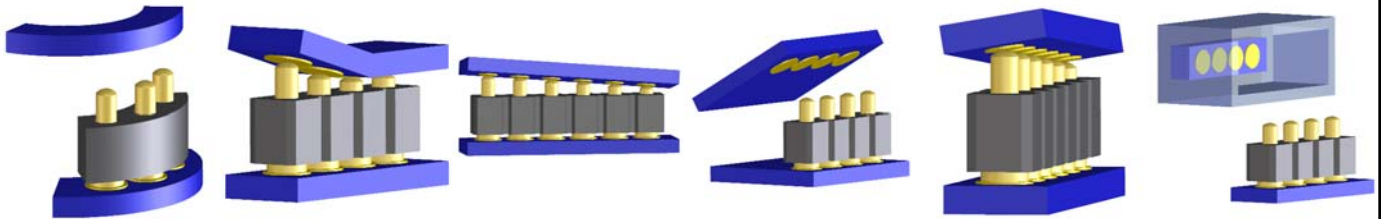

Some Typical Applications

Cable Termination



Internal Battery Connection



Charging Base for Portable Instruments



PCB Connection

