



SCDS103 - May 1994 - Revised February 2000

Data sheet acquired from Cypress Semiconductor Corporation.
Data sheet modified to remove devices not offered.

CYBUS3384

Dual 5-Bit Bus Switch

Features

- Zero propagation delay
- 2Ω switches connect inputs to outputs
- Direct bus connection when switches are ON
- High (>500 Meg Ω) resistance when switch is OFF
- Performs bidirectional translator function between 3.3V and 5.0V power supplies
- CMOS for low power dissipation
- Edge-rate control circuitry for significantly improved noise characteristics
- Inputs and outputs interface with 5.0V CMOS, TTL, or 3.3V CMOS
- ESD $> 2000V$
- Power-off disable

Functional Description

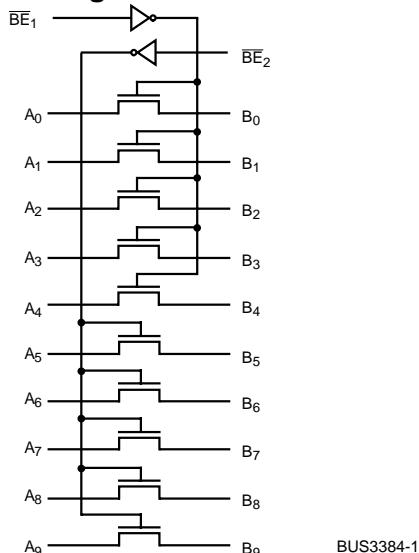
The CYBUS3384 is a ten-bit, two-port bidirectional bus switch that allows one bus to be connected directly to, or isolated from, another without introducing additional propagation delay or ground noise. The input and output voltage levels allow direct interface with TTL and CMOS devices. Two bus enable signals, \overline{BE}_1 and \overline{BE}_2 , turn on the upper and lower five bits, respectively.

Designed with a low resistance of 2Ω , the CYBUS3384 is ideal for use in VME or other high DC drive applications.


The power-off disable feature enables modules and cards to be either inserted or withdrawn from operating equipment without shutting down power. Additionally, the CYBUS3384 facilitates bidirectional interfacing between 3.3V and 5V systems by placing a single diode in series with the 5V V_{CC} line and a resistor from pin 24 to ground.

The CYBUS3384 is also suitable for small signal analog applications where crosstalk and off isolation performance of -66 dB at 50 MHz are required.

Logic Block Diagram



Pin Configurations

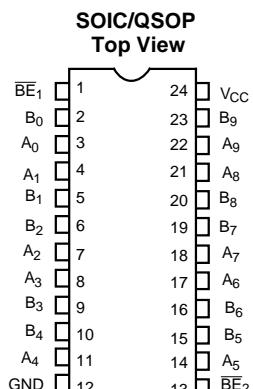

Pin Description

Name	Description
A	Bus A, Inputs or Outputs
B	Bus B, Inputs or Outputs
$\overline{BE}_1, \overline{BE}_2$	Bus Switch Enable

Function Table^[1]

\overline{BE}_1	\overline{BE}_2	Inputs		Function
		B_{0-4}	B_{5-9}	
H	H	High-Z	High-Z	Non-connect
L	H	A_{0-4}	High-Z	Connect
H	L	High-Z	A_{5-9}	Connect
L	L	A_{0-4}	A_{5-9}	Connect

Note:

1. H = HIGH Voltage Level. L = LOW Voltage Level. X = Don't Care.

Maximum Ratings^[2, 3]

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature -65°C to $+165^{\circ}\text{C}$

Ambient Temperature with

Power Applied -65°C to $+135^{\circ}\text{C}$

Supply Voltage to Ground Potential -0.5V to $+7.0\text{V}$

DC Input Voltage -0.5V to $+7.0\text{V}$

DC Output Voltage -0.5V to $+7.0\text{V}$

DC Output Current (Maximum Sink Current/Pin) 120 mA

Power Dissipation 0.5W

Static Discharge Voltage >2001V
(per MIL-STD-883, Method 3015)


Operating Range

Range	Ambient Temperature	V_{CC}
Commercial	-40°C to $+85^{\circ}\text{C}$	4.0V to 5.5V

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions	Min.	Typ. ^[4]	Max.	Unit
V_{IH}	Input HIGH Voltage	Control Inputs Only	2.0			V
V_{IL}	Input LOW Voltage	Control Inputs Only			0.8	V
V_H	Hysteresis ^[5]	Control Inputs Only		0.2		V
V_{IK}	Input Clamp Diode Voltage	$V_{CC}=\text{Min.}$, $I_{IN}=-18\text{ mA}$		-0.7	-1.2	V
R_{ON}	Switch On Resistance ^[6]	$V_{CC}=4.75\text{V}$, $V_{IN}=0.0\text{V}$, $I_{ON}=30\text{ mA}$	2	4	W	
		$V_{CC}=4.75\text{V}$, $V_{IN}=2.4\text{V}$, $I_{ON}=15\text{ mA}$	4	8	W	
I_{IN}	Input Leakage Current	$V_{CC}=\text{Max.}$, $V_{IN}=V_{CC}$			± 1	μA
I_{OZ}	Off State Current (High-Z)	$V_{CC}=\text{Max.}$, $V_{OUT}=0.5\text{V}$	0.001	± 1	μA	
I_{OFF}	Power-Off Disable	$V_{CC}=0\text{V}$, $V_{OUT}=4.5\text{V}$, $V_{IN}=V_{CC}$			± 1	μA
I_{OS}	Output Short Circuit Current ^[7]	$V_{CC}=\text{Max.}$, $V_{OUT}=0.0\text{V}$	100			mA

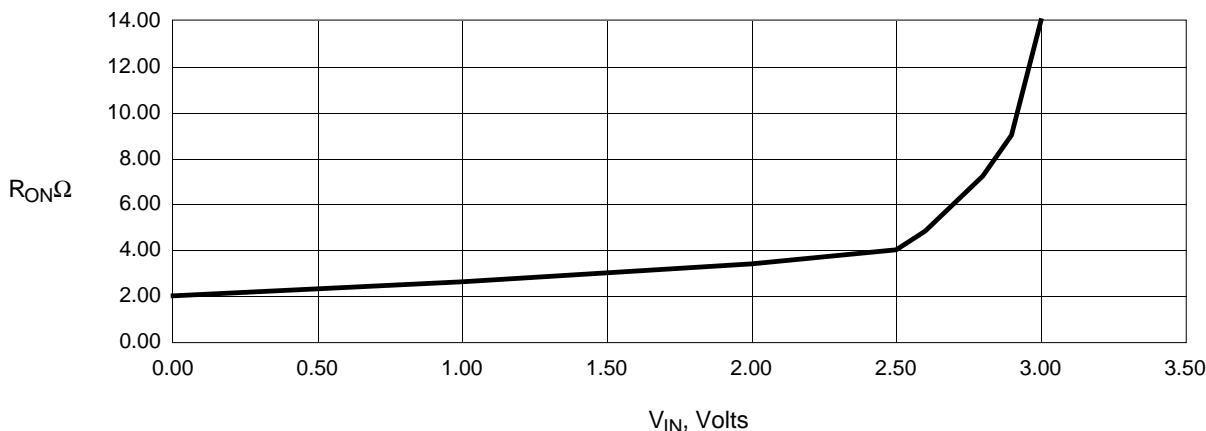On Resistance vs. V_{IN} @ 4.75 V_{CC}



Notes:

2. Unless otherwise noted, these limits are over the operating free-air temperature range.
3. Unused inputs must always be connected to an appropriate logic voltage level, preferably either V_{CC} or ground.
4. Typical values are at $V_{CC}=5.0\text{V}$, $T_A=+25^{\circ}\text{C}$ ambient.
5. This parameter is specified but not tested.
6. Measured by voltage drop between A and B pin at indicated current through the switch. On resistance is determined by the lower of the voltages on pin A or pin B.
7. Not more than one output should be shorted at a time. Duration of short should not exceed one second. The use of high-speed test apparatus and/or sample and hold techniques are preferable in order to minimize internal chip heating and more accurately reflect operational values. Otherwise prolonged shorting of a high output may raise the chip temperature well above normal and thereby cause invalid readings in other parametric tests. In any sequence of parameter tests, I_{OS} tests should be performed last.

Capacitance^[6]

Parameter	Description	Typ. ^[4]	Max.	Unit
C _{IN}	Input Capacitance	3	4	pF
C _{OUT}	Output Capacitance	7	8	pF

Power Supply Characteristics

Parameter	Description	Test Conditions ^[8]	Typ. ^[4]	Max.	Unit
I _{CC}	Quiescent Power Supply Current	V _{CC} =Max., V _{IN} ≤GND or V _{CC} , f=0	3384	0.2	3.0
			3L384	0.2	3.0
ΔI _{CC}	Quiescent Power Supply Current (Input HIGH) ^[9]	V _{CC} =Max., V _{IN} =3.4V, f=0, Per Control Input		2.0	mA
I _{CCD}	Dynamic Power Supply Current ^[10]	V _{CC} =Max., Control Input Toggling, @ 50% Duty Cycle, A & B Pins Open		0.12	mA/ MHz
I _C	Total Power Supply Current ^[11, 12]	V _{CC} =Max., Two Control Inputs Toggling, @ 50% Duty Cycle, f ₁ =10 MHz, V _{IN} =3.4V	3384	4.4	mA
			3L384	4.4	mA

Switching Characteristics Over the Operating Range^[13]



Parameter	Description	Commercial		Unit
		Min.	Max.	
t _{PLH} t _{PHL}	Propagation Delay A to B ^[14, 15]		.25	ns
t _{PZH} t _{PZL}	Switch Turn On Delay, $\overline{BE}_1, \overline{BE}_2$ to A, B ^[13]	1.5	6.5	ns
t _{PHZ} t _{PHZ}	Switch Turn Off Delay, $\overline{BE}_1, \overline{BE}_2$ to A, B ^[13, 14]	1.5	5.5	ns
Q _{cil}	Charge Injection, Typical ^[16, 17]		1.5	pC

Notes:

8. For conditions shown as MIN or MAX use the appropriate values specified under DC specifications.
9. Per TTL driven input (V_{IN}=3.4V); A and B pins do not contribute to I_{CC}. All other inputs at V_{CC} or GND.
10. This current applies to the control inputs only and represents the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is not tested but is specified by design.
11. $I_C = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}$
 $I_C = I_{CC} + \Delta I_{CC} D_H N_T + I_{CCD} (f_0/2 + f_1 N_1)$
 $I_{CC} = \text{Quiescent Current with CMOS input levels}$
 $\Delta I_{CC} = \text{Power Supply Current for a TTL HIGH input (V}_{IN}\text{=3.4V)}$
 $D_H = \text{Duty Cycle for TTL inputs HIGH}$
 $N_T = \text{Number of TTL inputs at D}_H$
 $I_{CCD} = \text{Dynamic Current caused by an input transition pair (HLH or LHL)}$
 $f_0 = \text{Clock frequency for registered devices, otherwise zero}$
 $f_1 = \text{Input signal frequency}$
 $N_1 = \text{Number of inputs changing at f}_1$
12. Note that activity on A or B inputs do not contribute to I_C. The switches merely connect and pass through activity on these pins.
13. See Test Circuit and Waveform. Minimum limits are specified but not tested.
14. This parameter is specified by design but not tested.
15. The bus switch contributes no propagation delay other than the RC delay of the on resistance of the switch and the load capacitance. The time constant for the switch is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.
16. Measured at switch turn off, A to C, load=50 pF in parallel with 10 meg scope probe, V_{IN} at A=0.0V.
17. Tested initially and after any design change which may affect this parameter.

Ordering Information CYBUS3384

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
0.25	CYBUS3384QCT	Q13	24-Lead (150-Mil) QSOP	Commercial
	CYBUS3384SOCT	S13	24-Lead (300-Mil) Molded SOIC	

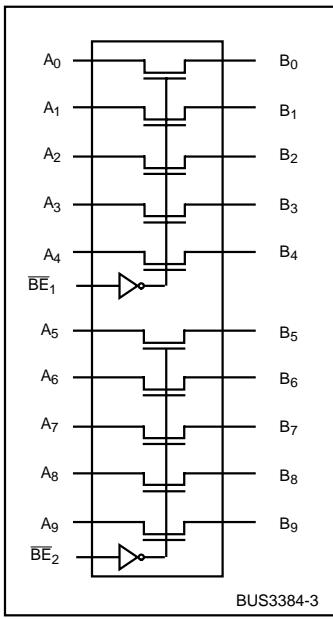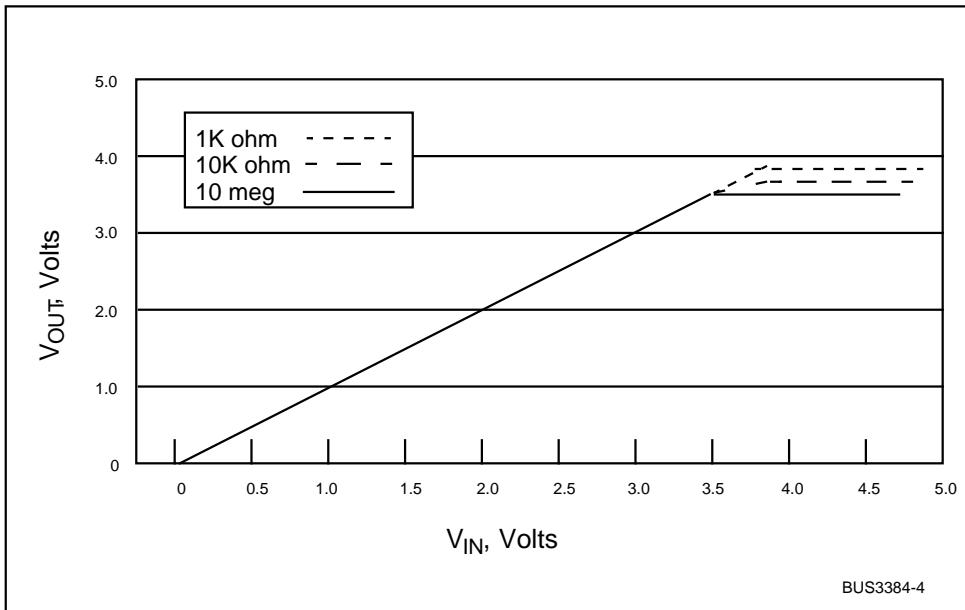
Figure 1. CYBUS3384

Figure 2. V_{OUT} vs. Volts
Application Information

The CYBUS3384 is a ten-channel bidirectional solid state bus switch with a "near zero" propagation delay.

The CYBUS3384 is organized into two groups of five N-Channel MOSFETs. Each group has an independent control input for output enable (see *Figure 1*). Because the N-channel MOSFET is physically symmetric, the device pin can act as an input or an output.

The two enable input (\overline{BE}_1 and \overline{BE}_2) sense TTL level signals and drive the gates of the N-channel MOSFETs to V_{CC} . With the gate at V_{CC} , the output voltage will follow the input voltage up to V_{CC} minus the threshold voltage. At this point the N-channel MOSFET begins to turn off, rapidly increasing the effective resistance (R_{ON}) such that further increases to input voltage no longer increase the output voltage (see *Figure 2*).

When either the input or output of the CYBUS3384 is near zero volts and the gate is at V_{CC} , the device is fully on, (low resistance) and available to pass large currents in either direction. In this condition, the CYBUS3384 inputs are directly connected to the outputs.

The CYBUS3384 provides no signal drive itself. As a result the rise and fall times of the CYBUS3384 outputs are determined by the device driving the CYBUS3384 inputs rather than the CYBUS3384 itself.

The propagation delay contributed by the CYBUS3384 is essentially zero when the N-channel gate is at V_{CC} .

When the device is unpowered, the CYBUS3384 draws no current from the I/O or control inputs, and there is no current path from the I/O or control to the power pins. There are no back power or current drain problems when the device is unpowered.

The CYBUS3384 provides an ideal interface between 5V and 3.3V components, since the CYBUS3384 provides no signal drive, the I_{CC} demands are small, limited to AC switching of the N-channel gates, control circuitry, and a minute amount of I/O leakage. Due to the low current demands of the CYBUS3384, it is possible to lower the CYBUS3384 V_{CC} from a standard 5.0V supply with a small, inexpensive diode and a resistor to provide a low-current full-bidirectional signal compatibility between 5V logic family signals and 3.3V logic family signals.

By adding a small, inexpensive diode and a resistor, the CYBUS3384 V_{CC} supply voltage can be shifted to 4.3V as shown in *Figure 3*. 5V signals will then be limited to 3.3V as they pass through the CYBUS3384. 3.3V signals will pass back through the CYBUS3384 unaltered and provide compatibility with 5V TTL input requirements. Note that the conversion is bidirectional and is limited to 3.3V independent of which side is driven to 5V. The CYBUS3384 could convert 5V signals for use on a 3.3V bus or convert a 5V bus to signals compatible with 3.3V components.

3.3V/5V Supply Operation

In certain system applications, the CYBUS3384 must operate from either a 5V or 3.3V power supply, depending on the state

of the system. If this occurs, the circuit shown in *Figure 4* can be added to step the 3.3V supply up to a nominal 5V level. The low-cost, high-efficiency Step Up regulator shown in the figure is available from Texas Instruments and other suppliers. The diode arrangement will automatically select the active supply. Standard silicon diodes can be used because the CYBUS3384 V_{CC} is specified at 4.0V.

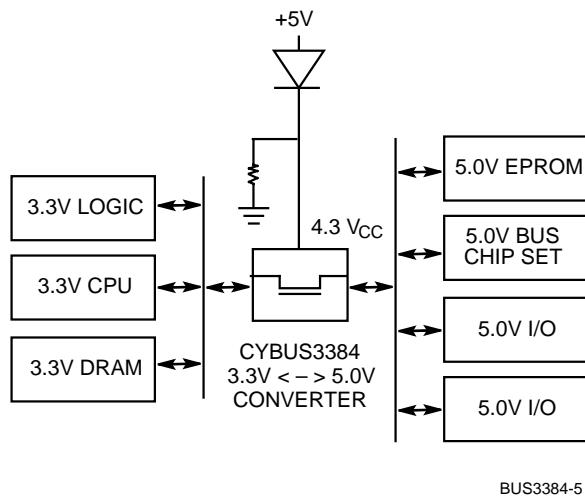


Figure 3. System with CYBUS3384 as 5V TTL to 3V Converter

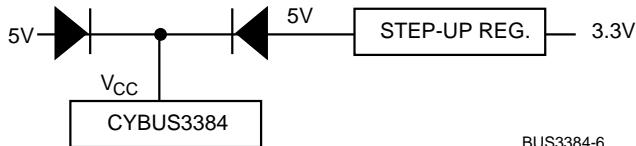


Figure 4. 3.3V/5V Supply Switch

Low Power Bus Isolation

Modern battery-operated systems rely on internal power management schemes to disconnect power from subsystems not

in use. Usually the subsystem bus input ESD protection circuits consist of a pair of clamp diodes to limit input voltage excursions to a maximum of $V_{CC}+V_t$ and $-V_t$ (see *Figure 5*). Removing power from these causes the V_{CC} ESD clamp diode to connect the dead circuit inputs to GND, often significantly increasing bus loading and power dissipation (see *Figure 6*). The CYBUS3384 placed on the input of the load to be disconnected effectively prevents bus loading and its associated problems.

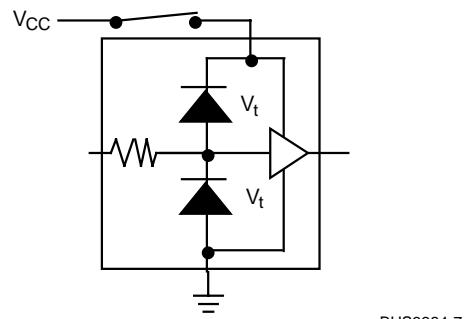


Figure 5. Gate Input (Power ON)

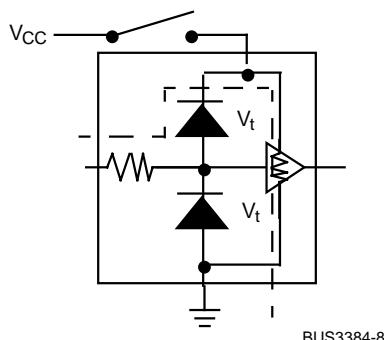


Figure 6. Gate Input (Power OFF)

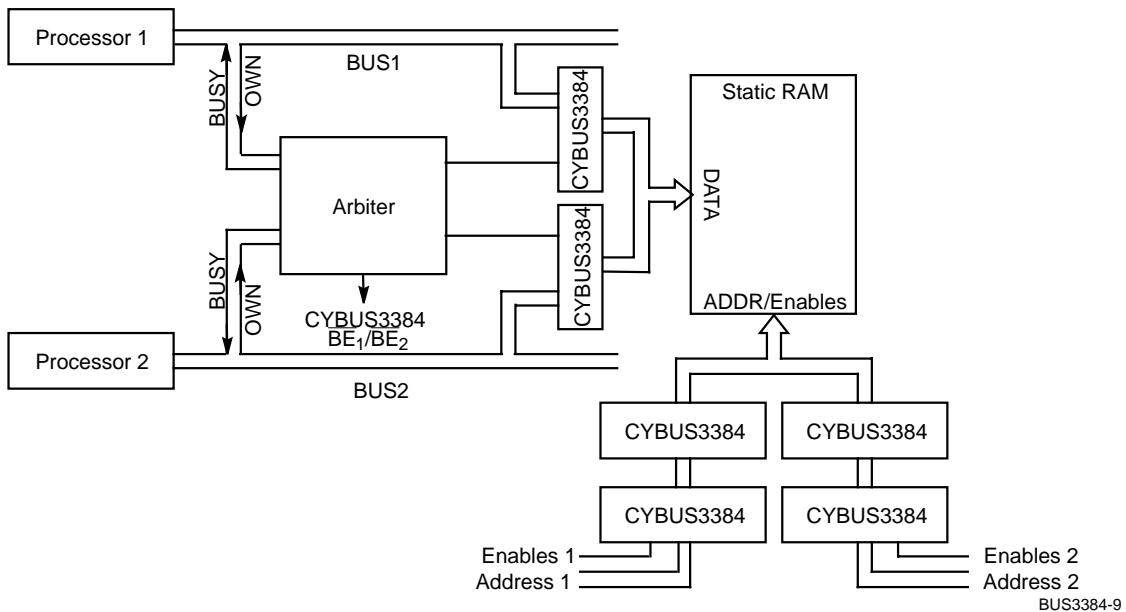


Figure 7. High Speed Dual Port RAM

High Speed Dual Port RAM

As shown in *Figure 7*, a high-speed, dual-port memory is implemented using a combination of commodity SRAM, a simple arbitration circuit, and the CYBUS3384. Processor 1 is the system host processor while Processor 2 is dedicated peripheral processor (such as a DSP for acquiring and manipulating data). Either processor can own the SRAM by first reading the BUSY bit to determine if the SRAM is available. If so, the requesting processor takes control by writing the OWN bit (which redirects the bus through the CYBUS3384s and sets the BUSY bit notifying the other bus the SRAM is not available). Processor 1 owns the bus and may now access the SRAM as needed. When finished, Processor 1 resets the OWN bit releasing the SRAM. The SRAM access sequence is identical for Processor 2. In this application, the CYBUS3384 saves 10 ns compared to using an F244 address buffer and an F245 data bus transceiver. This, in turn, allows the use of slower, less expensive SRAM, resulting in lower system cost and power savings.

Selectable Termination Loads

In some applications, it is desirable to vary the characteristic termination impedance as the system configuration changes. This is a common problem in automatic test equipment applications. Because of their low ON resistance, miniature relays are often used to switch termination loads. A single CYBUS3384 can replace as many as 10 such relays resulting in faster switching operation, lower power, and significant cost savings.

Fast Latch

Figures 8 and 9 show variations of a latch having a sub 1-ns propagational delay time using the CYBUS3384 in combination with other components. This circuit has the advantage of being four to ten times faster than an equivalent implementation using a 373 latch—and with no added noise. Figure 8 relies on the stray capacitance of the bus to maintain data when the CYBUS3384 opens. Assuming 50-pF stray capaci-

tance at room temperature and a 1 microampere input leakage current, a 1 volt “droop” from the initial voltage level would take 50 microseconds. *Figure 9* shows the addition of a physical capacitor if there is insufficient stray capacitance. *Figure 10* shows an active bus termination capable of sustaining the programmed logic for an indefinite period of time in the presence of V_{CC} .

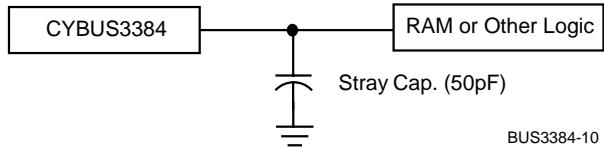


Figure 8. Latch Variation with Spray Capacitance

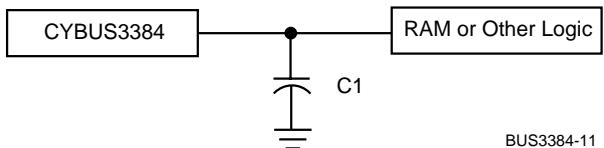


Figure 9. Latch Variation with Physical Capacitor

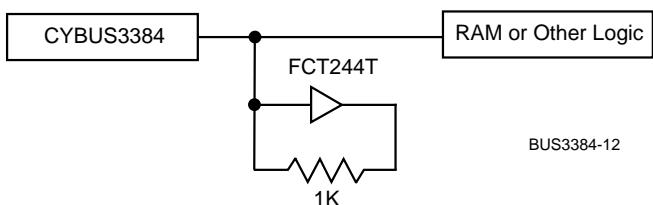
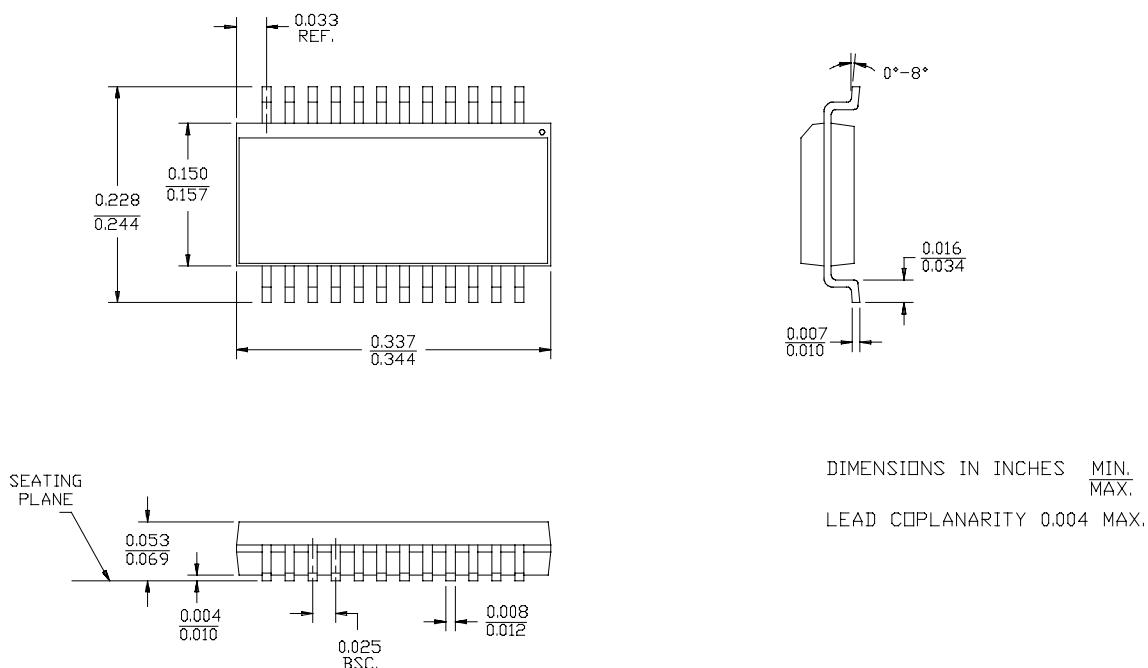
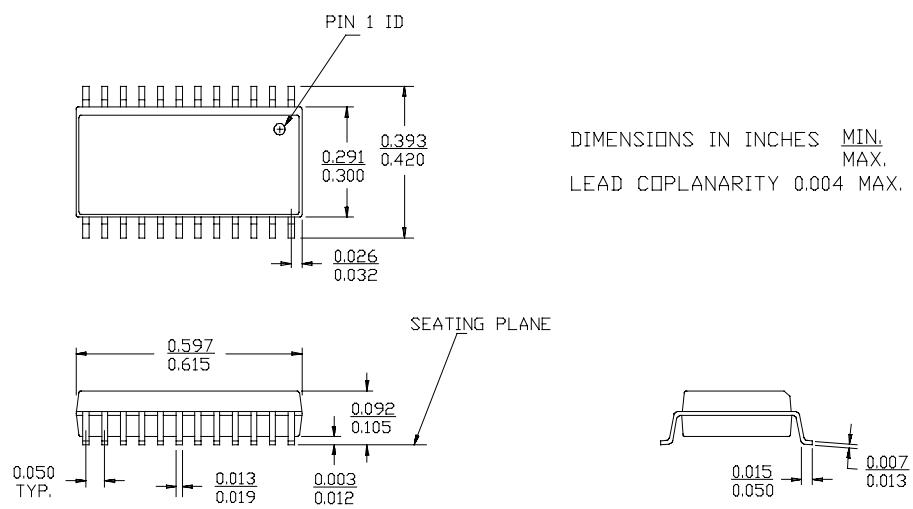


Figure 10. Active Bus Termination

Document #: 38-00355

Package Diagrams
24-Lead Quarter Size Outline Q13

24-Lead (300-Mil) Molded SOIC S13


PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
CYBUS3384QC	OBsolete	SSOP/ QSOP	DBQ	24		TBD	Call TI	Call TI
CYBUS3384QCT	OBsolete	SSOP/ QSOP	DBQ	24		TBD	Call TI	Call TI
CYBUS3384SOC	OBsolete	SOIC	DW	24		TBD	Call TI	Call TI
CYBUS3384SOCT	OBsolete	SOIC	DW	24		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

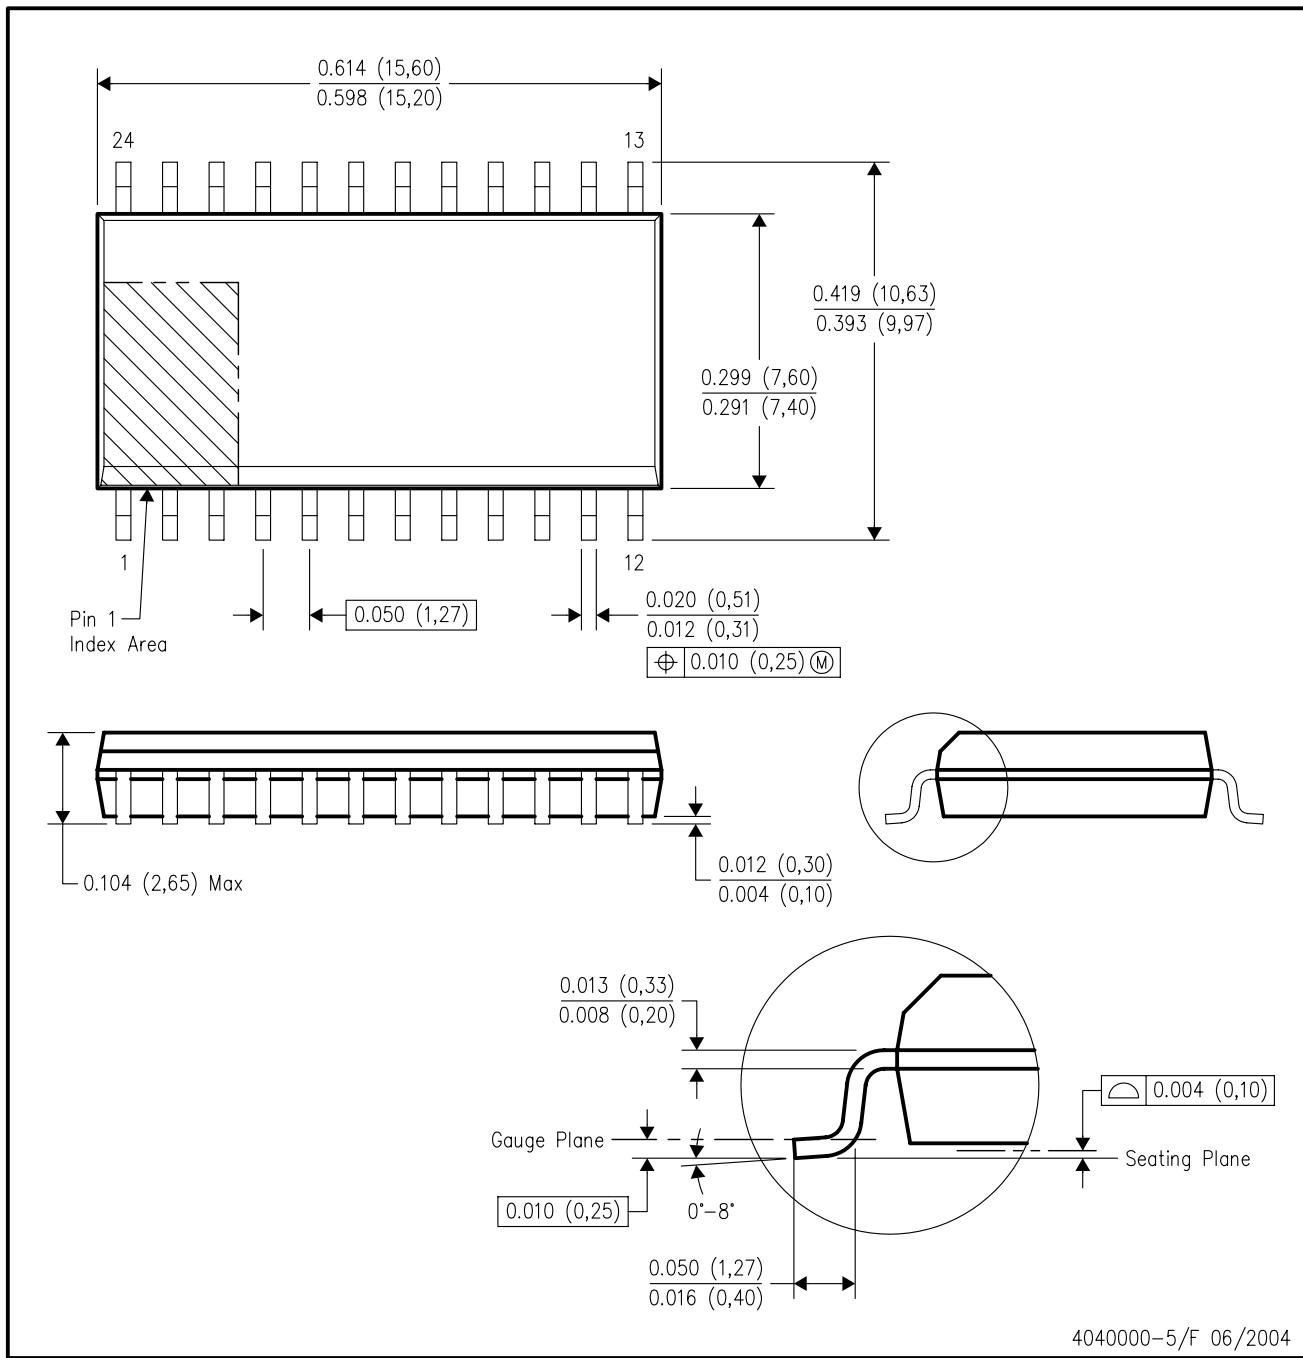
⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DW (R-PDSO-G24)

PLASTIC SMALL-OUTLINE PACKAGE




NOTES:

- All linear dimensions are in inches (millimeters).
- This drawing is subject to change without notice.
- Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0.15).
- Falls within JEDEC MS-013 variation AD.

DBQ (R-PDSO-G24)

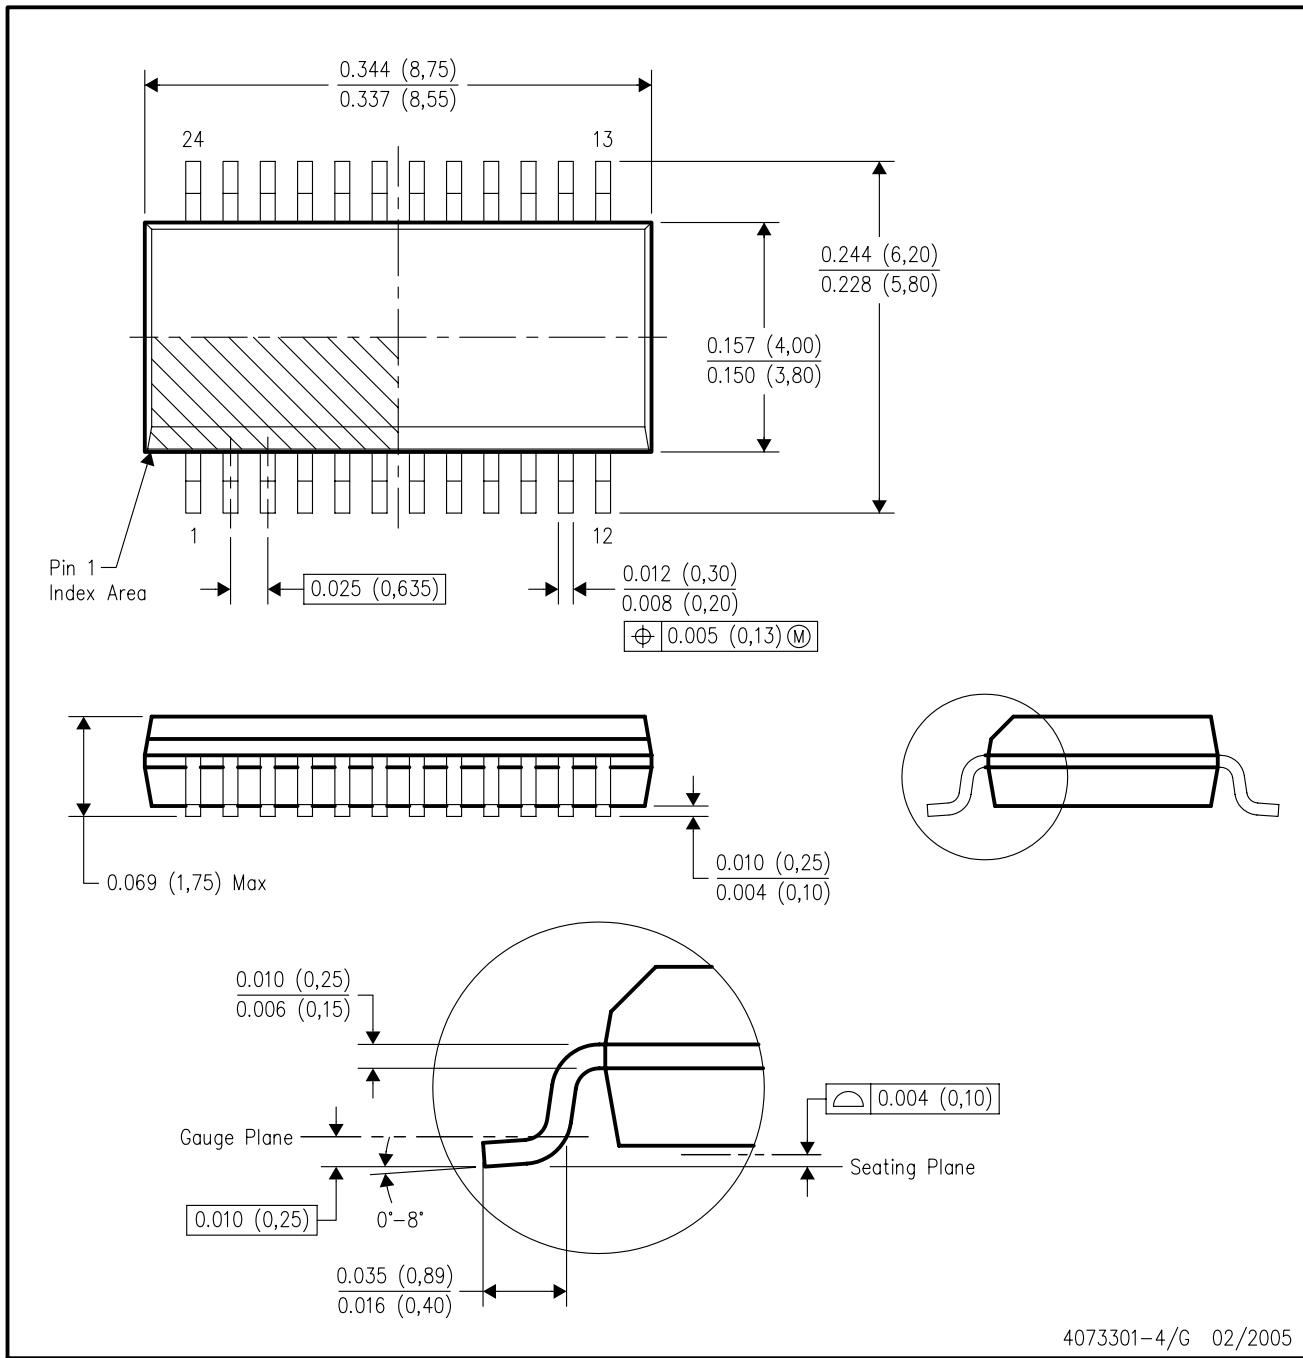PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- All linear dimensions are in inches (millimeters).
- This drawing is subject to change without notice.
- Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
- Falls within JEDEC MO-137 variation AE.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated