



Amplifier Built-in


NEW

RECTANGULAR INDUCTIVE PROXIMITY SENSOR

GX-F15/H15 SERIES




Long sensing range type is added to the lineup!

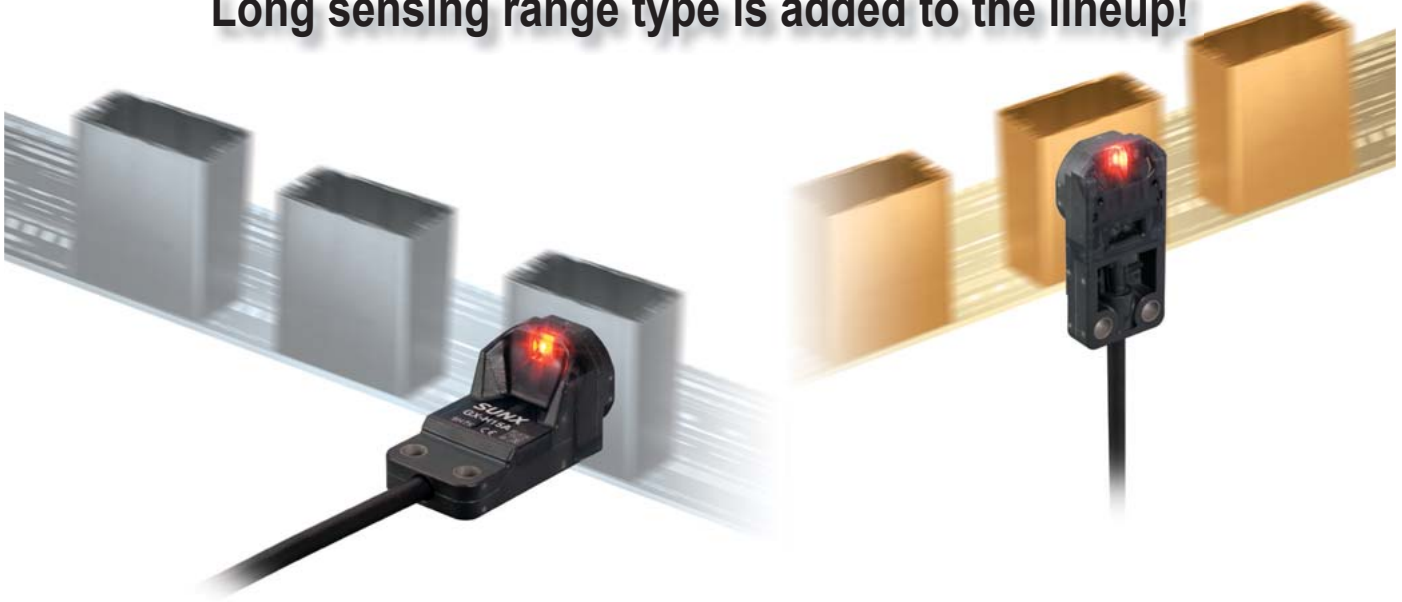

Stable detection by superior basic performance!

Variation at the max. operation distance is within $\pm 8\%$ | Temperature characteristics vary within $\pm 8\%$

Having little individual variability in the sensors along with excellent temperature characteristics, stable detection can be obtained.

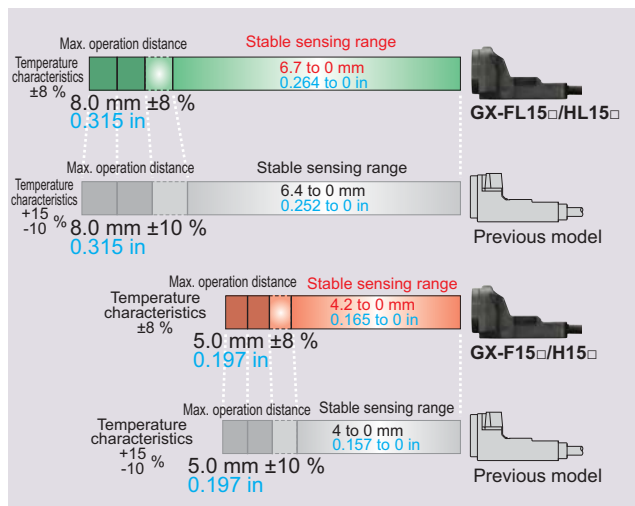

Highly resistant to water and oil! IP68g protection structure

The new integrated construction method used improves environmental resistance performance. Sensors can be used even in places where water or oil presents.



Operation indicator of high visibility

An easy-to-see operation indicator (orange) that has a prism with a wide field of view is incorporated.

GX-F(L)15□(-P)



GX-H(L)15□(-P)



Strong against vibration or shock!


With the new integrated construction method, the sensors was able to clear endurance tests of shock resistance of 10,000 m/s² acceleration (1,000 G approx. in X, Y and Z directions for three times each), and vibration resistance of 10 to 500 Hz frequency [3 mm 0.118 in (20 G max.) amplitude in X, Y and Z directions for two hours each].

Close mounting of two sensors

Different frequency type is available so that two sensors can be mounted closely together.

Mounting holes with metal sleeves for secure tightening

The mounting holes have metal sleeves inserted to prevent damage to the sensor due to over tightening.



Tightening torque: 1 N·m

I/O CIRCUIT DIAGRAM

Type		NPN output				PNP output			
		Long sensing range				Long sensing range			
Item	Model No. (Note 2)	Front sensing Top sensing	GX-F15A(I) GX-H15A(I)	GX-F15B(I) GX-H15B(I)	GX-FL15A(I) GX-HL15A(I)	GX-FL15B(I) GX-HL15B(I)	GX-F15A(I)-P GX-H15A(I)-P	GX-F15B(I)-P GX-H15B(I)-P	GX-FL15A(I)-P GX-FL15B(I)-P
Max. operation distance (Note 3)		5.0 mm	0.197 in $\pm 8\%$	8.0 mm	0.315 in $\pm 8\%$ (Note 4)	5.0 mm	0.197 in $\pm 8\%$	8.0 mm	0.315 in $\pm 8\%$ (Note 4)
Stable sensing range (Note 3)		0 to 4.2 mm	0 to 0.165 in	0 to 6.7 mm	0 to 0.264 in (Note 4)	0 to 4.2 mm	0 to 0.165 in	0 to 6.7 mm	0 to 0.264 in (Note 4)
Standard sensing object		Iron sheet 30 × 20 × 1 mm 0.7874 × 0.7874 × 0.039 in	Iron sheet 30 × 20 × 1 mm 1.181 × 1.181 × 0.039 in	Iron sheet 30 × 20 × 1 mm 1.181 × 1.181 × 0.039 in	Iron sheet 30 × 20 × 1 mm 0.7874 × 0.7874 × 0.039 in	Iron sheet 30 × 20 × 1 mm 1.181 × 1.181 × 0.039 in	Iron sheet 30 × 20 × 1 mm 0.7874 × 0.7874 × 0.039 in	Iron sheet 30 × 20 × 1 mm 1.181 × 1.181 × 0.039 in	Iron sheet 30 × 20 × 1 mm 0.7874 × 0.7874 × 0.039 in
		20 % or less of operation distance (with standard sensing object)							
Repeatability		Along sensing axis, perpendicular to sensing axis: 0.04 mm 0.0016 in or less							
Supply voltage		12 to 24 V DC $\pm 1\%$ Ripple P-P 10 % or less							
Current consumption		15 mA or less							
Output		NPN open-collector transistor • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 100 mA sink current)				PNP open-collector transistor • Maximum source current: 100 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (at 100 mA source current)			
	Output operation	Normally open	Normally closed	Normally open	Normally closed	Normally open	Normally closed	Normally open	Normally closed
Max. response frequency		250 Hz		150 Hz (Note 5)		250 Hz		150 Hz (Note 5)	
Operation indicator		Orange LED (lights up when the output is ON)							
Protection		IP68 (IEC), IP68g (JEM) (Note 6, 7)							
Ambient temperature		-25 to +70 °C -13 to +158 °F, Storage: -40 to +85 °C -40 to +185 °F							
Ambient humidity		45 to 85 % RH, Storage: 35 to 95 % RH							
Sensing range variation	Temperature characteristics	Over ambient temperature range -25 to +70 °C -13 to +158 °F: Within $\pm 8\%$ of sensing range at 23 °C +73.4 °F.							
	Voltage characteristics	Within $\pm 2\%$ for $\pm 1\%$ % fluctuation of the supply voltage							
Material		Enclosure: PBT, Indicator part: Polyester							
Cable		0.15 mm ² 3-core oil, heat and cold resistant cabtyre cable, 1 m 3.281 ft long							
Net weight		20 g approx.							

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) "I" in the model No. indicates a different frequency type.

3) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

4) The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

5) This is when mounted onto an insulant plate. When mounted onto a steel or stainless steel plate, insert the optional aluminum sheet between the sensor and the plate.

6) This is when mounted onto an insulant plate. When mounted onto a metallic plate, max. response frequency will decrease.

7) **SUNX's IP68 test method**

1) Immerse at 0 m below 0 °C **+32 °F** water surface and leave for 30 min. Then, immerse at 0 m below +70 °C **+158 °F** water surface and leave for 30 min.

2) Regard the heat shock test in ① as one cycle and perform 20 cycles.

3) Leave in water at a depth of 1 m **3.281 ft** in water for 500 hours.

4) After tests ① to ③, insulation resistance, voltage withstandability, current consumption, and sensing range must meet the standard values.

7) If using the sensor in an environment where cutting oil droplets splatter, the sensor may be deteriorated due to added substances in the oil.

Cable length 5 m 16.404 ft type, flexible cable type

Cable length 5 m **16.404 ft** type (standard is 1 m **3.281 ft**) and flexible cable (excluding cable length 5 m type) are available.

However, long sensing range type is not available.

When ordering cable length 5 m **16.404 ft** type, suffix “-C5” to the model No.

When ordering flexible cable type, suffix “-R” to the model No.

(e.g.) 0.5m **1.640 ft** cable length type of **GX-F15AI-P** is “**GX-F15AI-P-C5**”.

Flexible cable type of **GX-F15AI-P** is “**GX-F15AI-P-R**”.


OPTIONS

Sensor mounting bracket

- MS-GXL15

Nut is not attached.

Mounting

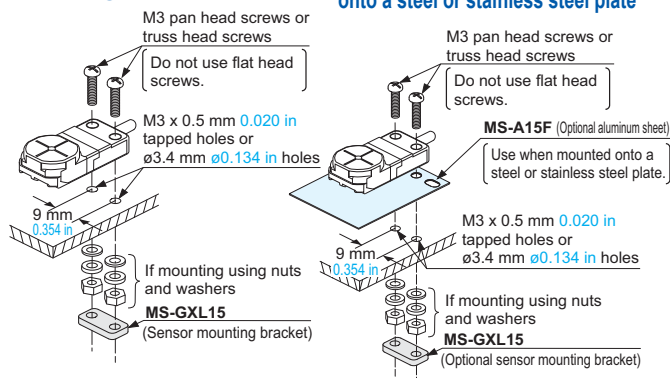

Aluminum sheet


• MS-A15F [For GX-FL15□(-P)]

- MS-A15H [For GX-HL15□(-P)]


Mounting example when mounted onto a steel or stainless steel plate

I/O CIRCUIT DIAGRAM

GX-F(L)15□ GX-H(L)15□ NPN output type

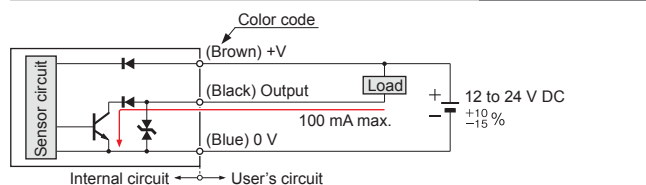


GX-F(L)15□-P **GX-H(L)15□-P** PNP output type

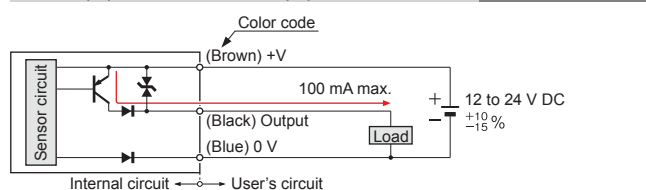


DIMENSIONS (Unit: mm in)


GX-F(L)15□(-P) Sensor

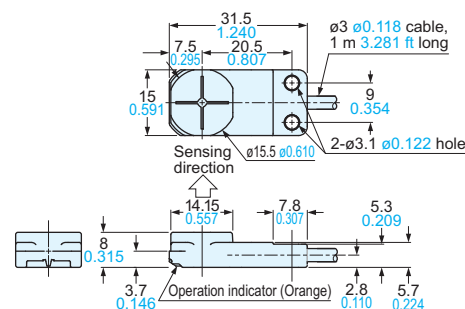

GX-H(L)15□(-P) Sensor

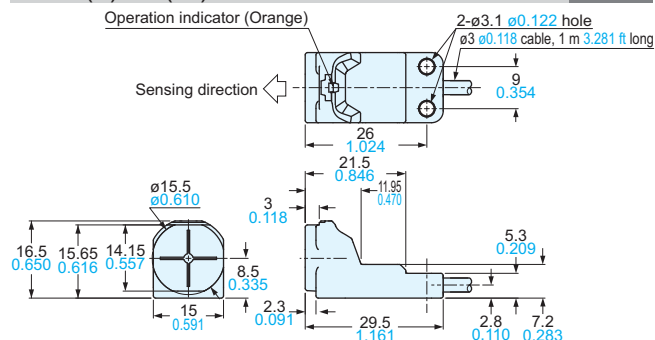


MS-GXL15 Sensor mounting bracket (Optional)



Material: SPCC

MS-A15F Aluminum sheet
MS-A15H (Optional)



All information is subject to change without prior notice.

**SUNX Limited**

2431-1 Ushiyama-cho, Kasugai-shi, Aichi,
486-0901, Japan
Phone: +81-568-33-7211
FAX: +81-568-33-2631

Overseas Sales Division

Phone: +81-568-33-7861
FAX: +81-568-33-8591

<http://www.sunx.com>