

Turbo Light™

TLH-87G-930-S



More Information

 [UL Recognized](#)

 RoHS Stocked

Specifications


Revision: 4.12

Green Continuous Ultra Bright Output Indicator; Panel Mount Case and Quick Connect Blades with Screws Termination


Mounting:	Panel Mount
Operating Mode:	Ultra Bright Green Indicator
Operating Voltage:	9-30 Vdc
Typical Operating Current:	110 mA at 9 Vdc 50 mA at 30 Vdc
Typical Brightness:	4500 cd/m ² , at 9 Vdc, at 25°C 4700 cd/m ² , at 30 Vdc, at 25°C
Termination:	Quick Connect Blades with Screws
Termination Strength:	Pull test with a maximum of 22 pounds (10 kg) load
Operating Temperature:	-20°C to +65°C
Storage Temperature:	-40°C to +85°C
Surge Voltage:	20% over maximum rated voltage for less than 5 minutes
Reverse Voltage Protection:	To the maximum operating voltage
Construction Materials:	Lens/Case- Green Translucent Polycarbonate 94 VO Potting- 2 parts epoxy resin or silicone, black
Gasket:	Gasket (Included)— 0.125" Thick, 60 Durometer Neoprene
Environmental Durability:	ASTM B117 Certified - Withstands exposure to salt spray for 300 hours IP 68 Certified - Withstands water submergence and dust exposure Humidity- 95% relative humidity at +40°C continuously for 100 hours. Vibration- Withstands vibration between 0 and 55 Hz. on all axes.
Life Expectancy:	10 years under normal operating conditions.
Warranty:	For a period of two years from the date of manufacture under normal operating conditions.

Dimensions

REAR




RING




GASKET



SIDE

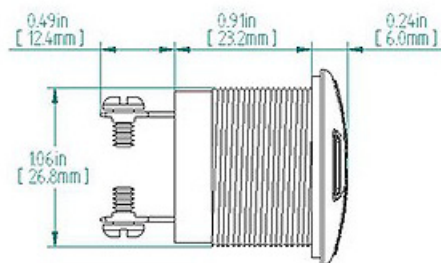

FRONT



TOLERANCES ARE ±0.03in (±0.76mm) UNLESS OTHERWISE SPECIFIED