


2mm

LED CBI® Circuit Board Indicator Single, Top View

Dialight

555-3xxx

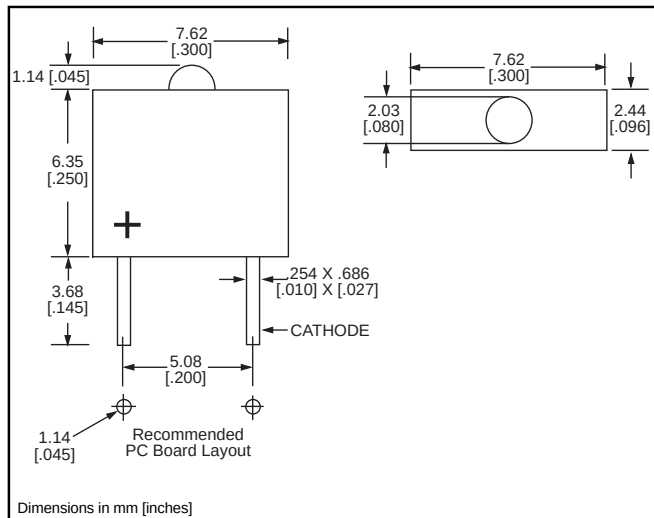

PART NO.

COLOR

GENERAL PURPOSE

555-3001
555-3301
555-3401

Red
Green
Yellow

INTEGRAL RESISTOR, 5 Volt

555-3003
555-3004
555-3007
555-3009
555-3303
555-3403

Red
Red
Red
Red
Green
Yellow

INTEGRAL RESISTOR, VARIOUS VOLTAGES

555-3002
555-3005
555-3006
555-3008
555-3010

Red, 3.6V
Red, 10V
Red, 14V
Red, 24V
Red, 15V

Benefits

- Small 2mm design conserves board space
- Available with a variety of LEDs
- Housing material meets UL94 V-0
- Black housing enhances contrast
- Vibration and shock resistant
- High reliability - life measured in years
- Compatible with 555-5xxx Quad Block

LED Data

- For absolute maximum ratings, and other electrical/optical data, refer to LED data sheet.

Typical Operating Characteristics ($T_A = 25^\circ\text{C}$)**GENERAL PURPOSE**

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\theta_{1/2}$	LED Data sheet	Page #
555-3001	Red	650	1.2	1.6	20	40°	2ND-9412	3-14
555-3301	Green	565	1	2.4	20	40°	2ND-9414	3-14
555-3401	Yellow	583	2	2.2	20	40°	2ND-9416	3-14

INTEGRAL RESISTOR - 5V

Part Number	Color	Peak Wavelength nm	I_V mcd	I_F mA	Test Voltage	Viewing Angle $2\theta_{1/2}$	LED Data sheet	Page #
555-3003	Red	650	1.9	6	5	40°	2RD-9614	3-15
555-3004	Red	650	5.2	17	5	40°	2RD-9617	3-15
555-3007	Red	650	.9	3	5	40°	2RD-9613	3-15
555-3009	Red	650	.6	1	5	40°	2RD-9618	3-15
555-3303	Green	565	2.5	4.7	5	40°	2RD-9615	3-15
555-3403	Yellow	583	2.1	4.7	5	40°	2RD-9616	3-15

INTEGRAL RESISTOR, VARIOUS VOLTAGES

Part Number	Color	Peak Wavelength nm	I_V mcd	I_F mA	Test Voltage	Viewing Angle $2\theta_{1/2}$	LED Data sheet	Page #
555-3002	Red	650	6.2	20	3.6	40°	2RD-9620	3-15
555-3005	Red	650	4.2	14	10	40°	2RD-9621	3-15
555-3006	Red	650	3.1	10	14	40°	2RD-9619	3-15
555-3008	Red	650	.9	3	24	40°	2RD-9623	3-15
555-3010	Red	650	.9	3	15	40°	2RD-9622	3-15

NOTE: See LED Data sheets for additional information.