



SMT-1028-S-R 10x10mm Transducer

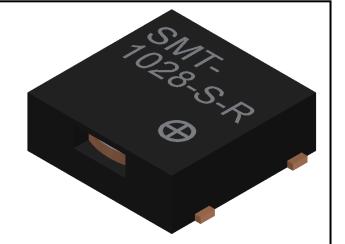

3541 Stop Eight Road • Dayton, Ohio 45414


Product Overview

- Side-firing electromechanical transducer designed for 2 to 4 Vp-p
- Small 10 x 10mm footprint with surprising 93 dB output
- 2,830 Hz resonant frequency targets most sensitive region of human hearing
- Designed for reflow soldering using a lead-free profile

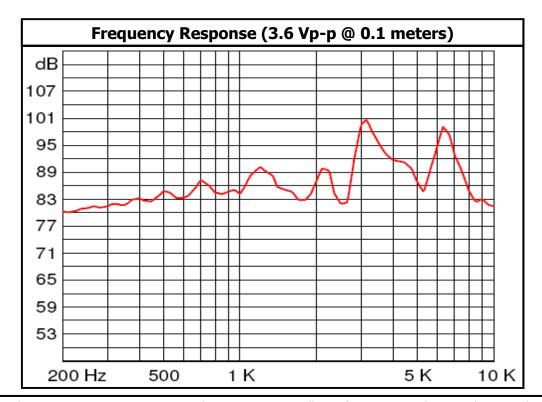







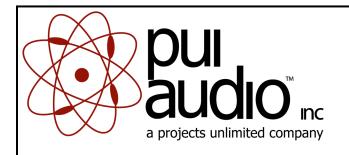


SMT-1028-S-R 10x10mm Transducer

Mechanical and Environment Testing			
Test Description	Test Condition		
High Temperature	85°C (±2°C) with random humidity for 96 hours		
Low Temperature -40°C (±2°C) with random humidity for 96			
Humidity	25°C to 60°C with 90% to 95% relative humidity for 12 hours, 10 cycles		
Vibration	1.53 mm movement modulated at 10-55 Hz in 3 directions for 6 hours		
Drop Test	Orop Test 120 cm free fall in six directions, 3 cycles		
Temperature Cycle Test	-30°C to 70°C, five 90 minute cycles		

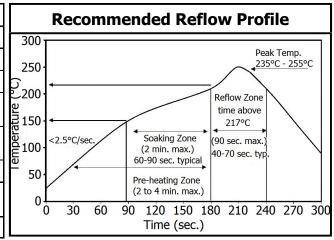

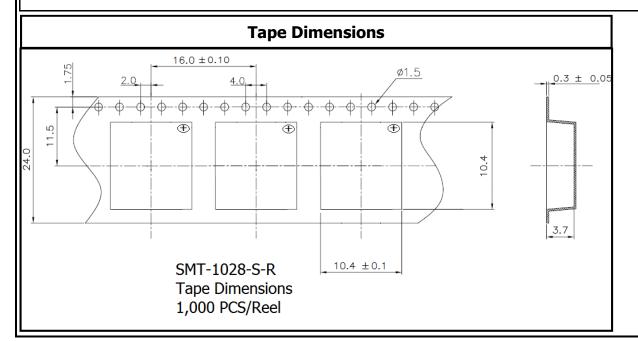

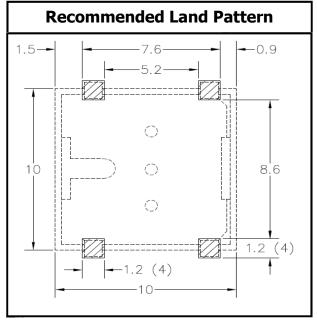



SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED VOLTAGE (SQUARE WAVE)	3.6	Vp-p	
OPERATING VOLTAGE RANGE	3 ~ 4.6	Vp-p	
RATED CURRENT (MAX)	100	mA	
COIL RESISTANCE	18 ± 5	OHM	
MINIMUM SPL @ 10 CM	93	dBA	
RESONANT FREQUENCY	2,830 ± 500	Hz	
OPERATING TEMPERATURE	-20 ~ +70	°C	
STORAGE TEMPERATURE	-40 ~ +85	°C	
HOUSING MATERIAL	LCP	-	
TERMINAL MATERIAL	Cu WRAPPED		
I ERIVIINAL IVIA I ERIAL	FR4 Au PLATED		
WEIGHT	0.9	grams	


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPR WRIT

TROSECTS ONEITHED, INC. AIT OSE OR		
RODUCTION, IN ANY FORM, WITHOUT PRIOR		
TTEN PERMISSION OF PROJECTS UNLIMITED,		
INC. IS PROHIBITED.		
©2003 Projects Unlimited Inc		

REVISION HISTORY				
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	7/19/2005		
Α	REVISED TERMINAL MATERIAL	1/20/2006	B.R.	
В	REVISED HOUSING AND TERMINAL MATERIAL	8/21/2006	B.R.	
С	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	11/6/2007	B.R.	

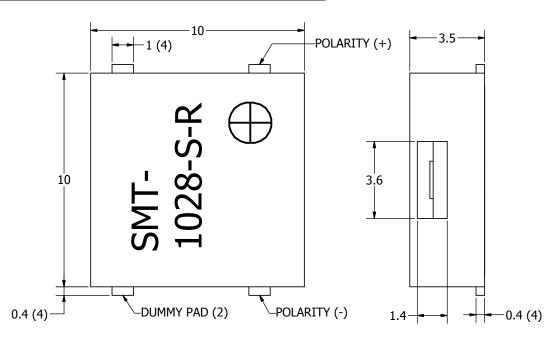

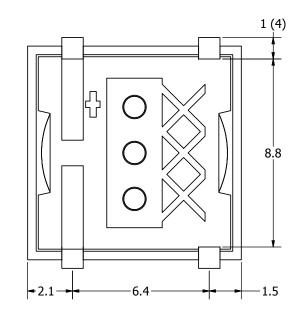



NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:	CIZE	
DIMENSIONS ARE IN MILLIMETERS,	SIZE	
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3	
SMT-1028-S-R.idw		

R.C.	7/19/2005	
	ווומ	
	audic	TM
	a projects unlimited co	nc

Date

Designed by

Checked by	Date	Approved by	Date	Drawn Date
		E.P.	7/19/2005	11/6/2007
SMT-1028-S-R				

Edition Sheet Transducer (Electro-Mech) 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio:

SMT-1028-S-R SMT-1028-S-2-R