



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		A	REDRAWN WITH CHANGE ECR-05-001810	18APR05	J.S	N.Y
			A1	REVISED ECR-05-017845	13DEC05	J.S	N.Y
			A2	REV PER ECO-10-000443	13JAN10	KK	AEG

- 注：
- 一般公差±0.3,±3°
 - 適用ハウジング型番：172469
 - 取扱説明書番号：15-212J


- NOTES:
- GENERAL TORELANCE±0.3,±3°
 - APPLICABLE HOUSING P/N: 172469
 - APPLICABLE INSTRUCTION SHEET: 15-212J

△4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△4 OBSOLETE	—//—	錫めっき済 銅合金 PRE-TIN COPPER ALLOY	172765-2
	172766-1	錫めっき済 黄銅 PRE-TIN BRASS	172765-1
	ばら状端子型番 LOOSE PIECE P/N	材 料 MATERIAL	型番 P/N

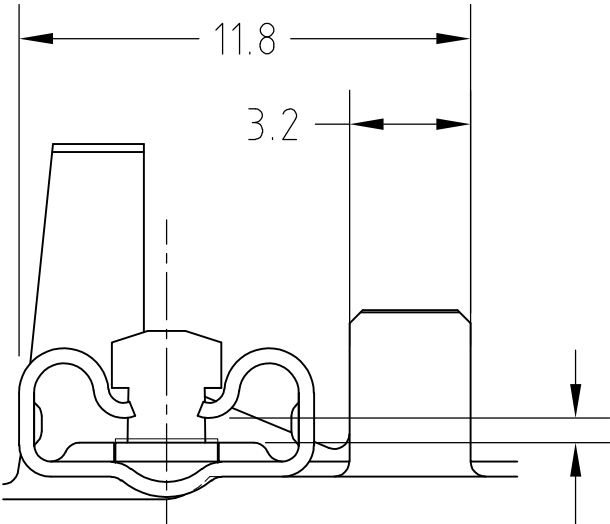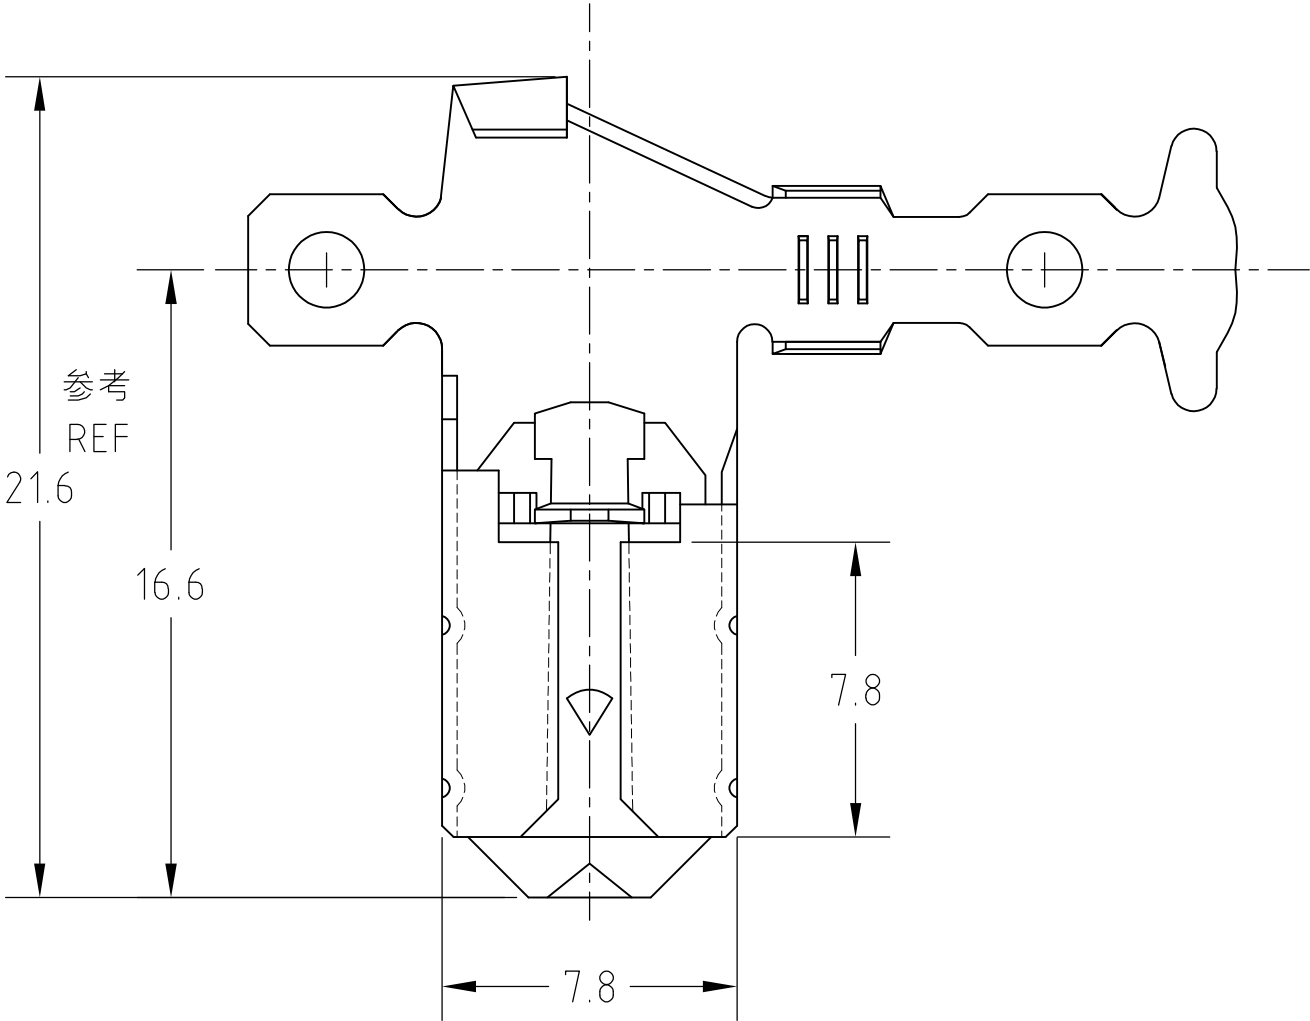

0.8厚タブとカン合
MATE WITH 0.8mm THK TAB

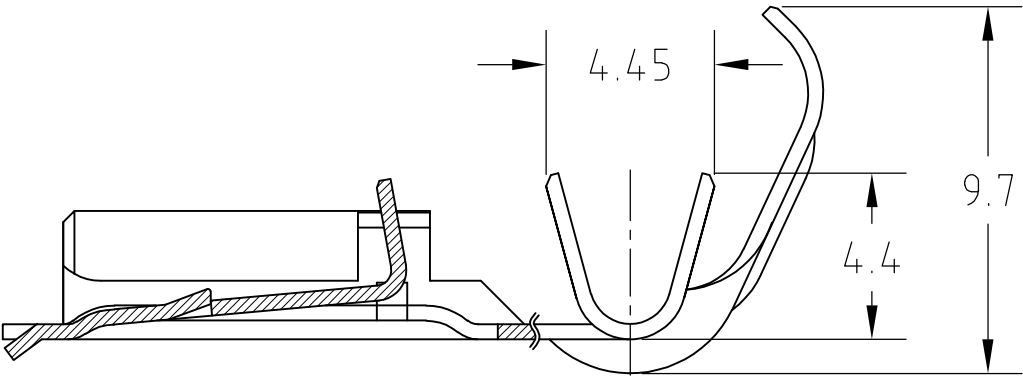

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SATO	18APR2005	tyco Electronics		Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位： 耗 mm		CHK N.YAMASAKI	18APR.2005	APVD N.YAMASAKI		NAME 名称	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		PRODUCT SPEC 製品規格		APPLICATION SPEC 取付適用規格		250 SERIES FLAG POSITIVE LOCK (MARK-II) RECEPTACLE	
MATERIAL 材料		WEIGHT		SIZE A3		CAGE CODE 00779	
SEE TABLE		CUSTOMER DRAWING		DRAWING NO 番号		RESTRICTED TO —	
				SCALE 尺度		SHEET 1 OF 1	
						REV A2	