


FREE POSITION
ADJUSTMENT TAB

OPERATING POSITION
ADJUSTMENT TAB—


(2) 6-32 x 1.125^{REF.} ROUND HEAD MACHINE SCREW

-(2) 6-32 NC ST'D HEX. NUT (AN 340-6)

-(2) LOCKWASHER (AN 936 A6)

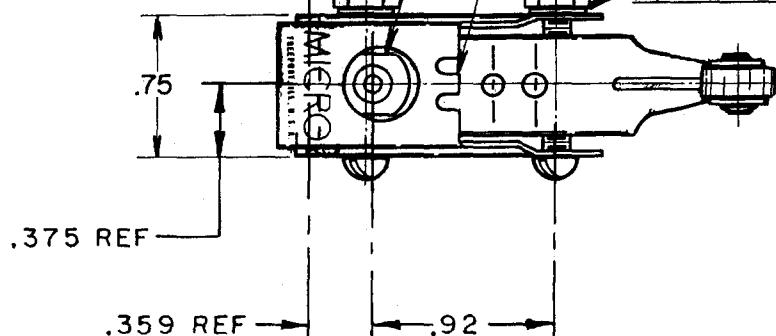

-.37 DIA. x .15 WIDE HARDENED
STEEL ROLLER.

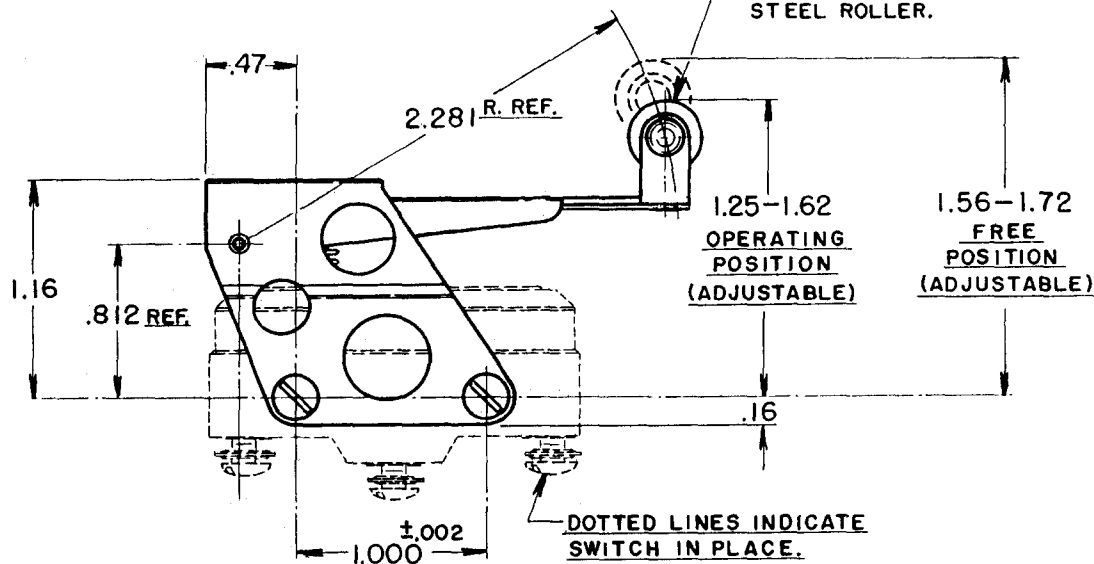


-DOTTED LINES INDICATE
SWITCH IN PLACE.

NOTE—

I-SCREWS, NUTS, AND LOCKWASHERS FURNISHED UNASSEMBLED.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA		SCALE	FULL	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT	BREAK DISTANCE	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
OVERTRAVEL — — — — .438 APPROX.			ONE PLACE	(.0)	±.030
			TWO PLACE	(.00)	±.015
			THREE PLACE	(.000)	±.005
			ANGLES		±
			WEIGHT		