


CUSTOMER DRAWING

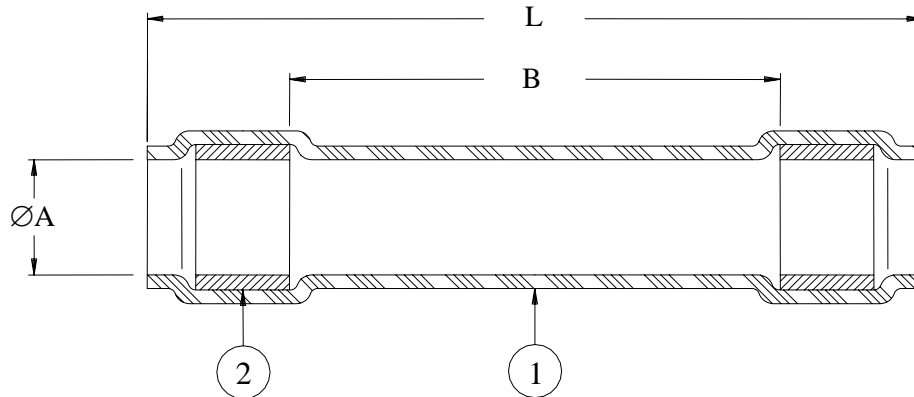


Part Description	Product Dimensions		
	L Max	B Nom	ØA Min
RT-555-3/8-2.75-A260-0	69.9 (2.75)	25.4 (1.00)	8.3 (0.33)
RT-555-3/8-4.75-A260-0	120.7 (4.75)	76.2 (3.00)	8.4 (0.33)
RT-555-1/2-2.75-A260-0	69.9 (2.75)	25.4 (1.00)	11.4 (0.45)
RT-555-1/2-5.75-A260-0	146.1 (5.75)	101.6 (4.00)	11.4 (0.45)
RT-555-3/4-3.00-A260-0	76.2 (3.00)	31.8 (1.25)	17.7 (0.70)
RT-555-3/4-6.75-A260-0	171.5 (6.75)	127.0 (5.00)	17.7 (0.70)
RT-555-1.0-3.75-A260-0	95.3 (3.75)	50.8 (2.00)	22.8 (0.90)
RT-555-1.0-6.75-A260-0	171.5 (6.75)	127.0 (5.00)	22.8 (0.90)

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified fluoropolymer. Color: Black.
2. MELTABLE INSERT: Environment resistant modified thermoplastic fluoroelastomer. Color: Light Blue

APPLICATION

1. This part is designed to provide an immersion resistant seal on wires having insulation diameters as specified on table and temperature rating of at least +150°C (302°F).
2. Temperature range: -65°C to +200°C (-85°F to +392°F).
Maximum temperature of 260°C (500°F) when exposed for 500 continuous hours.

		Tyco Electronics Corp. 300 Constitution Drive, Menlo Park, CA. 94025		Raychem Molded Parts		TITLE: SEALING SLEEVE					
Unless otherwise specified, dimensions are in millimeters. [Dimensions shown in brackets are in inches]						DOCUMENT NO.: RT-555-X/X-YYY-A260-0					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REVISION: C		DATE: March 6, 2009			
PREPARED BY: YUNGUYEN		ECO NUMBER: ECO-09-005685				CAGE CODE : 06090		SCALE: N/A		SIZE: A	

© 2009 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.