


P.C.JACKS-CLOSED ENTRY-SOLDER MOUNT

09-9050-1-XX P.C. JACK FOR .016 THRU .019 OR .020 ONLY, PINS*

BASIC PART NO. FINISH

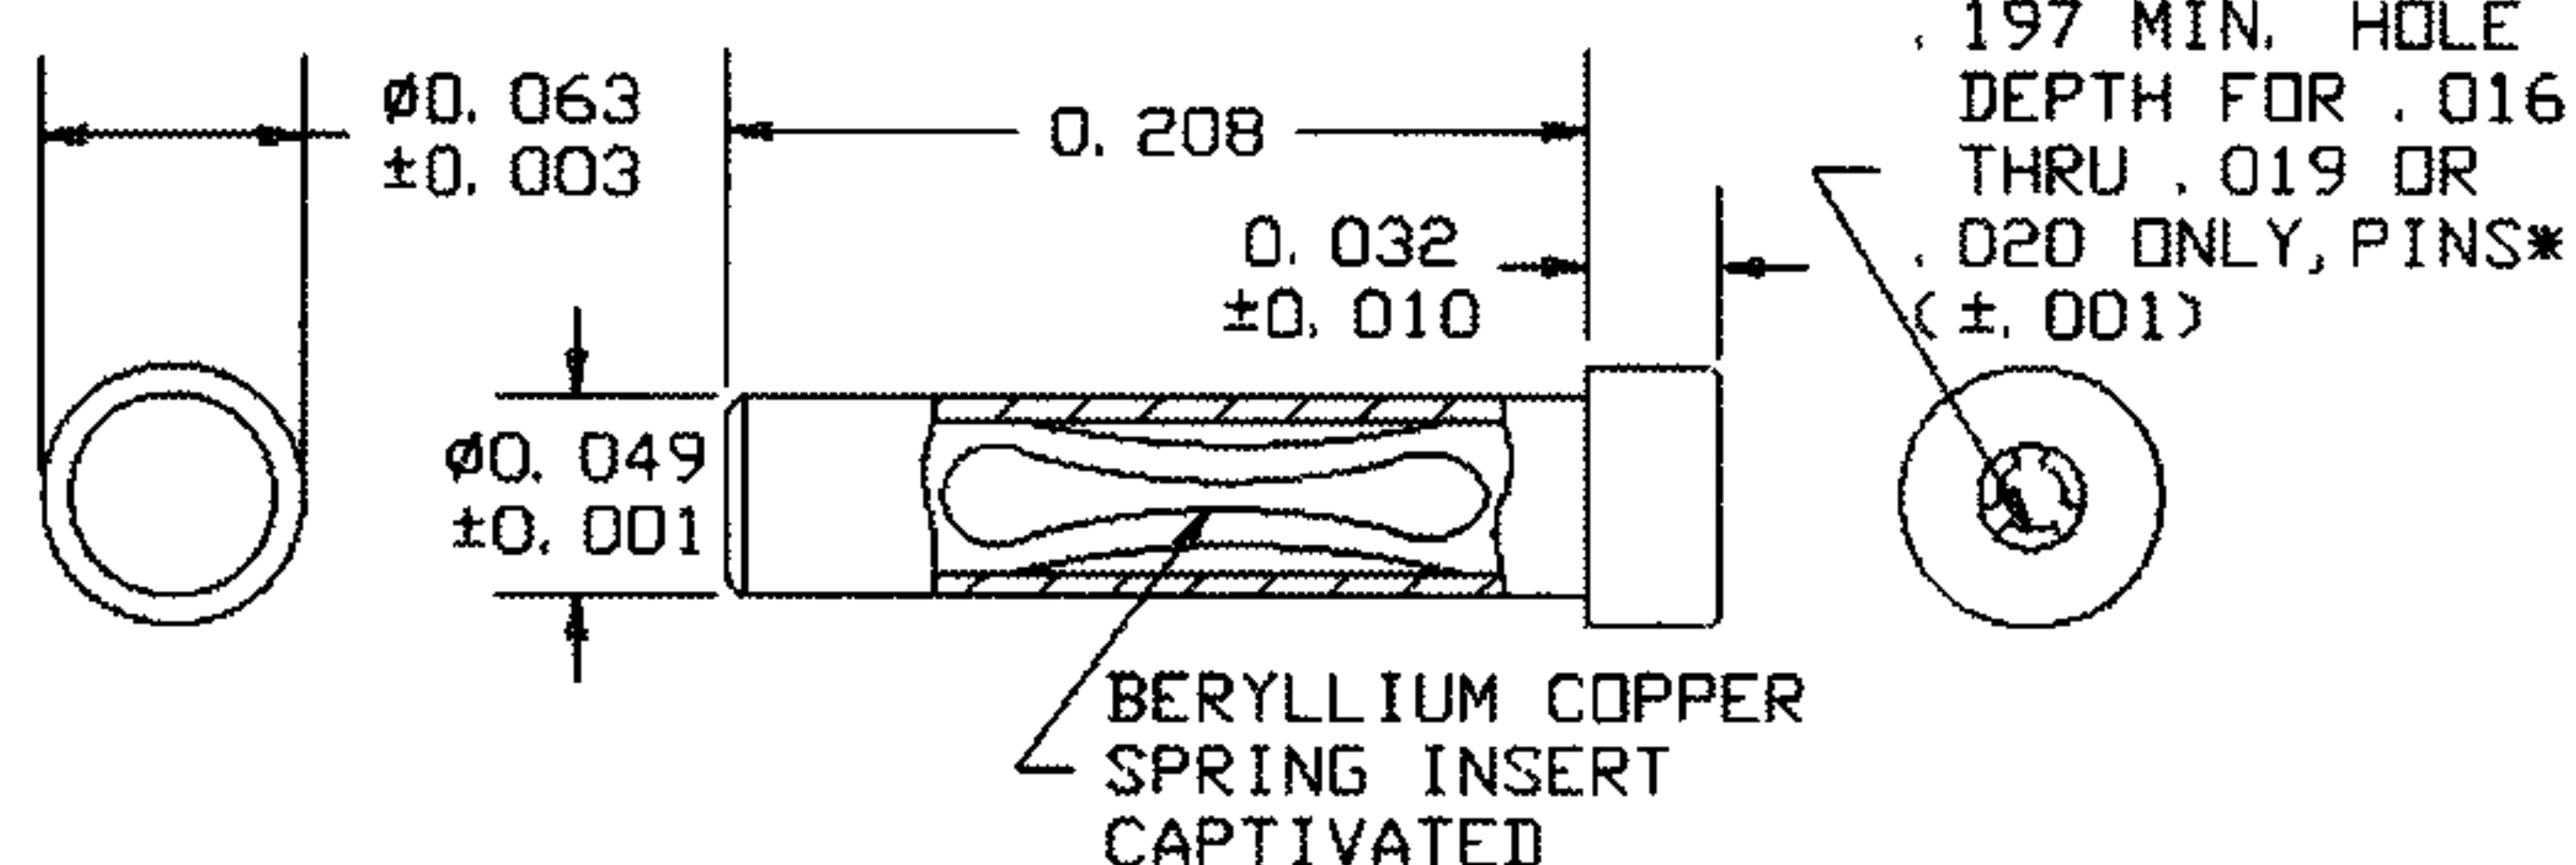


ACCEPTS .016 THRU .019 OR .020 ONLY, PINS*
BOARD THICKNESS .031 TO .156

RECOMMENDED MOUNTING HOLE .052±.002/-.001 (#55 DRILL)

*ONCE AN .020 PIN IS INSERTED, THE USE OF .016 THRU .019 PINS IS NO LONGER RECOMMENDED

09-9049-1-XX P.C. JACK FOR .016 THRU .019 OR .020 ONLY, PINS*

BASIC PART NO. FINISH

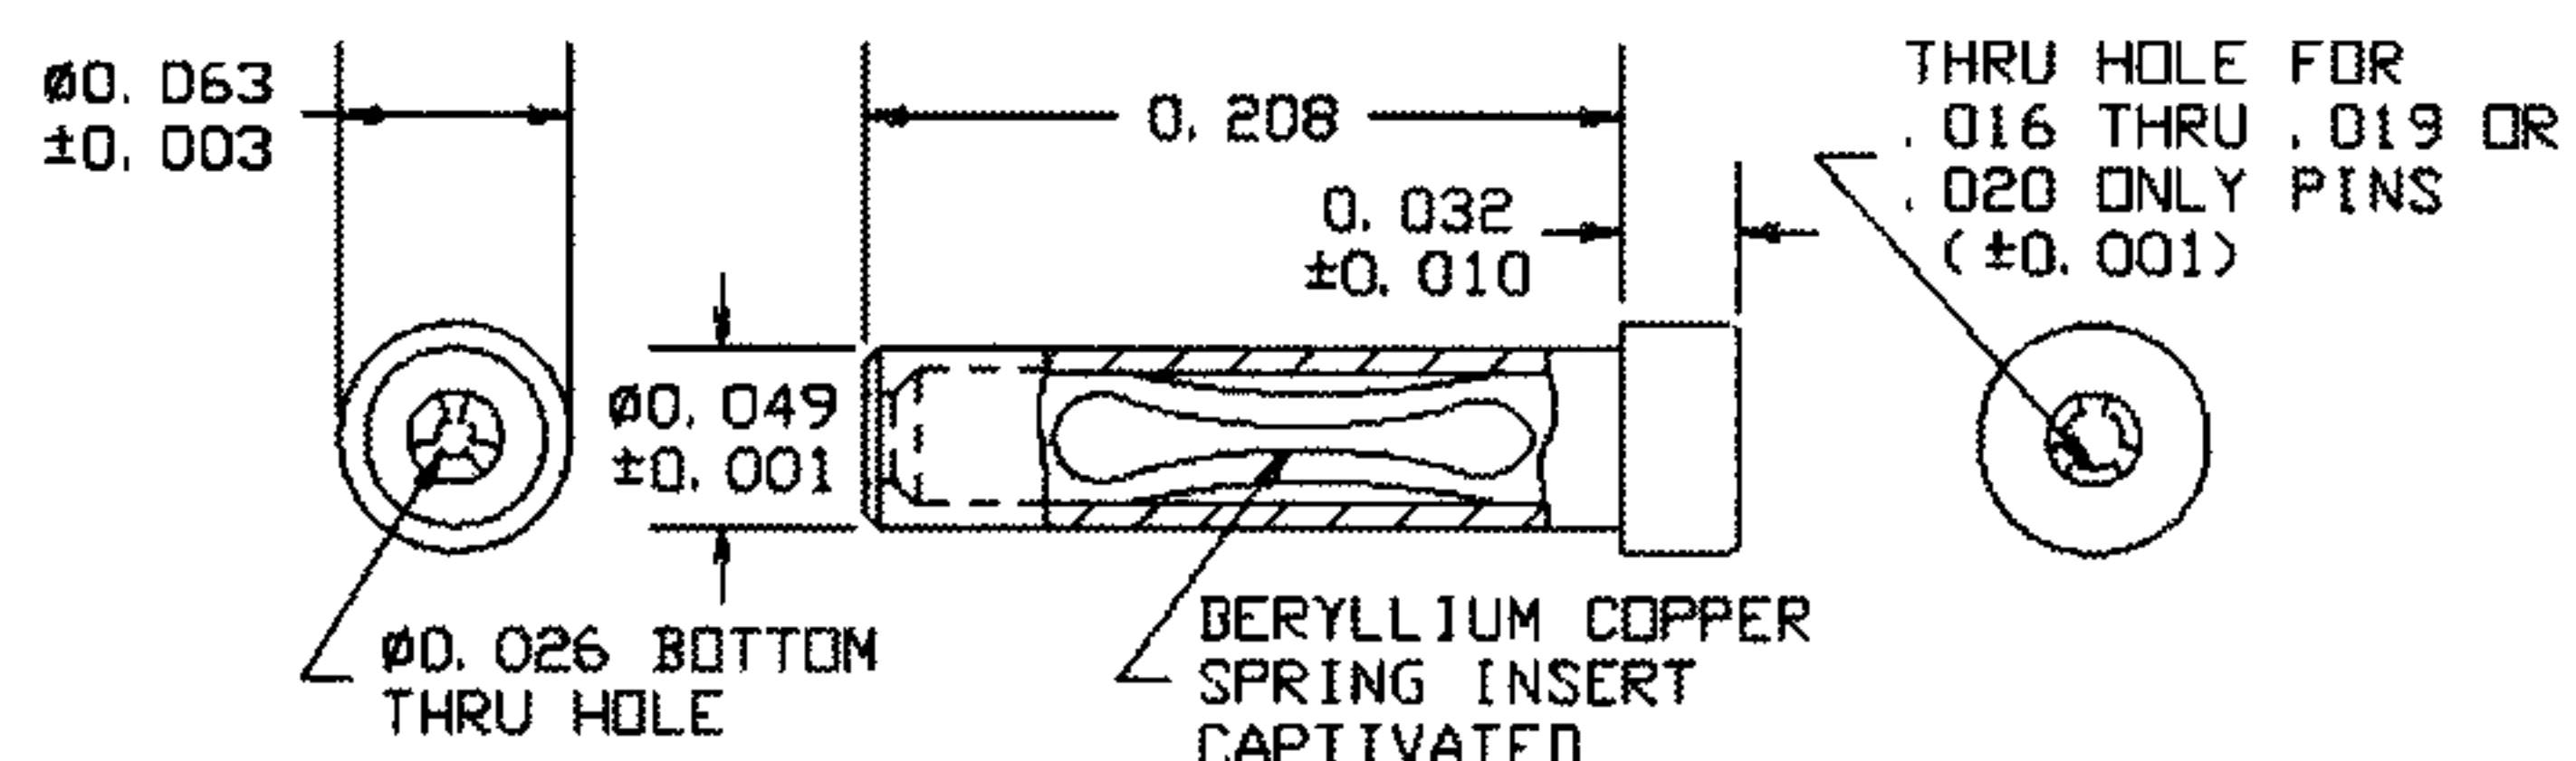


ACCEPTS .016 THRU .019 OR .020 ONLY, PINS*
BOARD THICKNESS .031 TO .156

RECOMMENDED MOUNTING HOLE .052±.002/-.001 (#55 DRILL)

*ONCE AN .020 PIN IS INSERTED, THE USE OF .016 THRU .019 PINS IS NO LONGER RECOMMENDED

09-9026-1-XX P.C. JACK FOR .016 THRU .019 OR .020 ONLY, PINS*

BASIC PART NO. FINISH

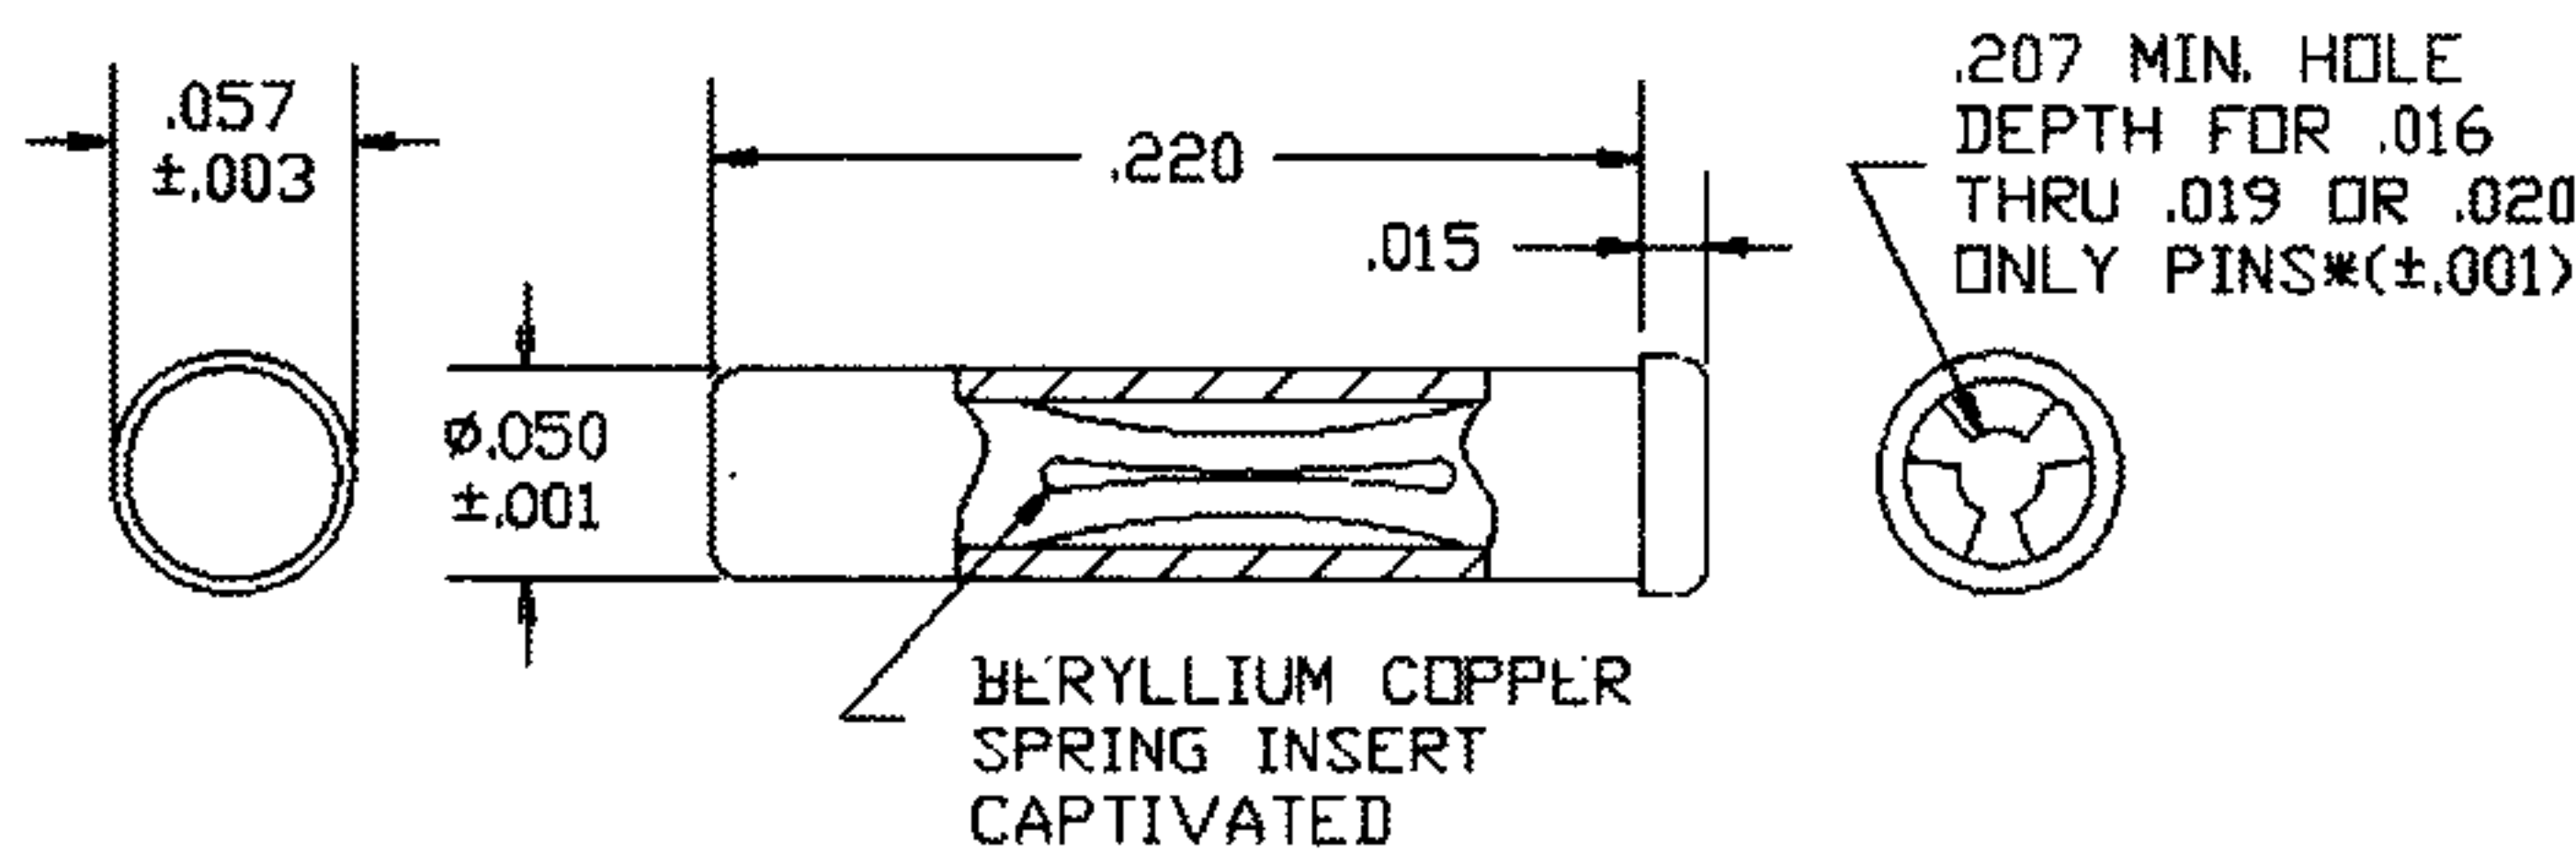


ACCEPTS .016 THRU .019 OR .020 ONLY, PINS*
BOARD THICKNESS .031 TO .188

RECOMMENDED MOUNTING HOLE .052±.001(#55 DRILL)

*ONCE AN .020 PIN IS INSERTED, THE USE OF .016 THRU .019 PINS IS NO LONGER RECOMMENDED

09-9026-2-XX P.C. JACK FOR .016 THRU .019 OR .020 ONLY, PINS*

BASIC PART NO. FINISH

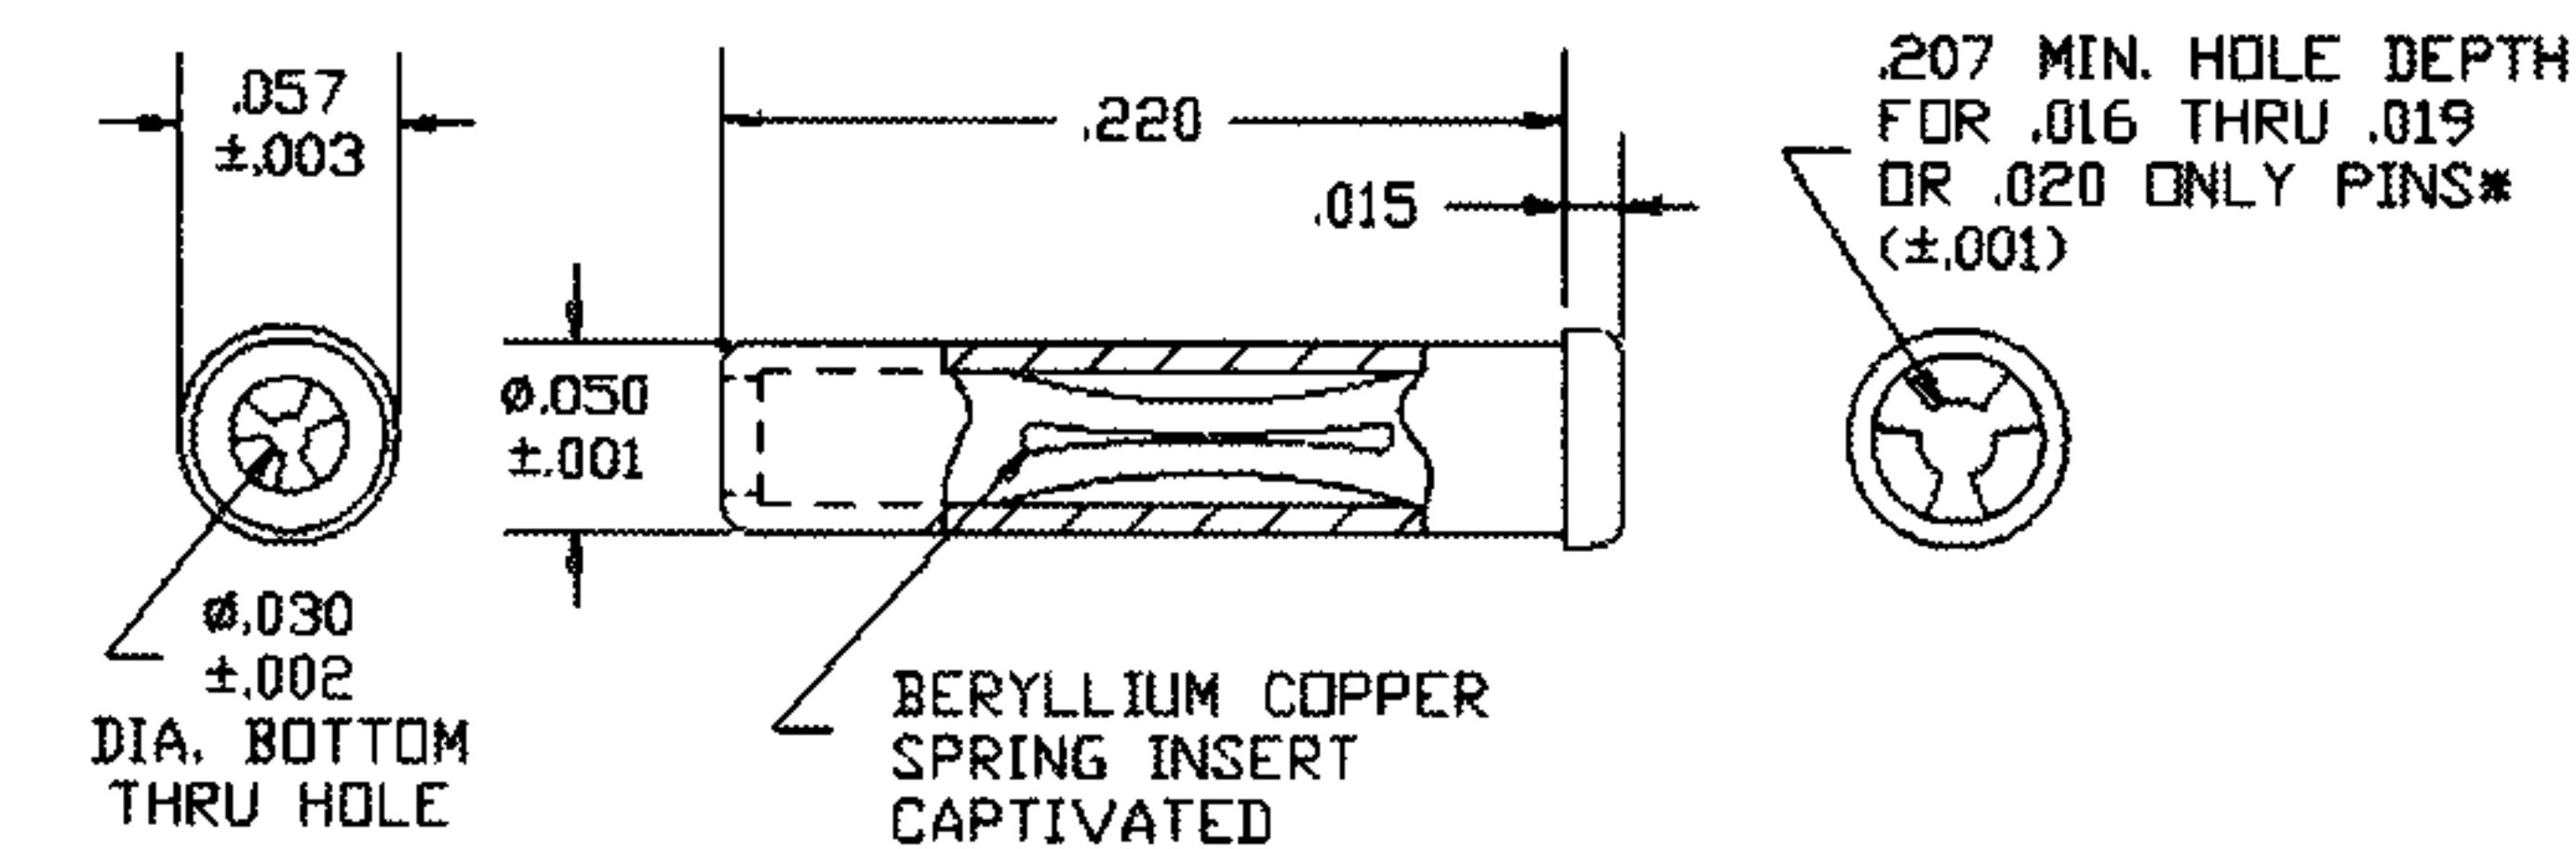


ACCEPTS .016 THRU .019 OR .020 ONLY, PINS* BOARD THICKNESS .031 TO .188

RECOMMENDED MOUNTING HOLE .052±.001(#55 DRILL)

*ONCE AN .020 PIN IS INSERTED, THE USE OF .016 THRU .019 PINS IS NO LONGER RECOMMENDED

09-9093-1-XX P.C. JACK FOR .022 PIN

BASIC PART NO. FINISH

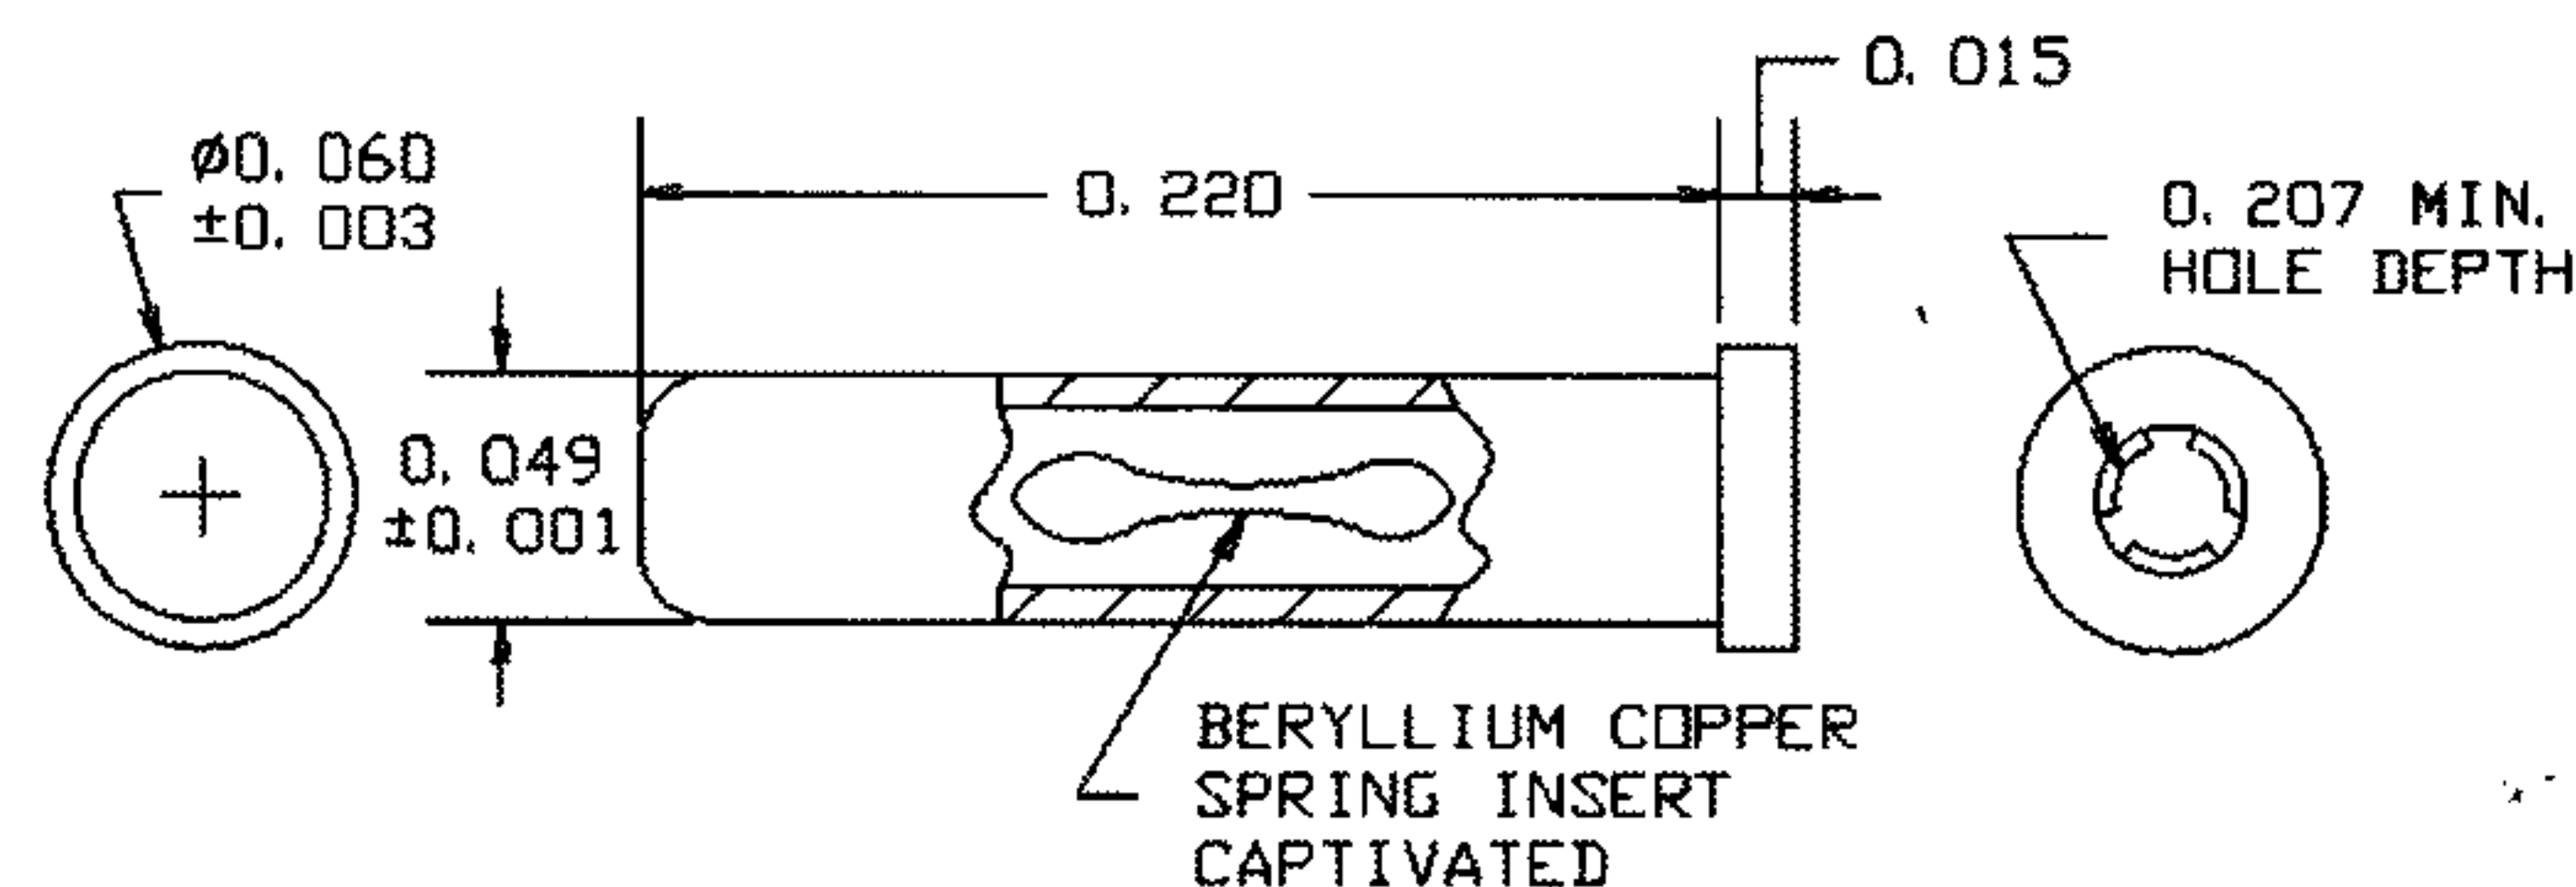


ACCEPTS .022 PIN

RECOMMENDED MOUNTING HOLE .052±.002(#55 DRILL)

09-9015-1-XX P.C. JACK FOR .025 PIN

BASIC PART NO. FINISH

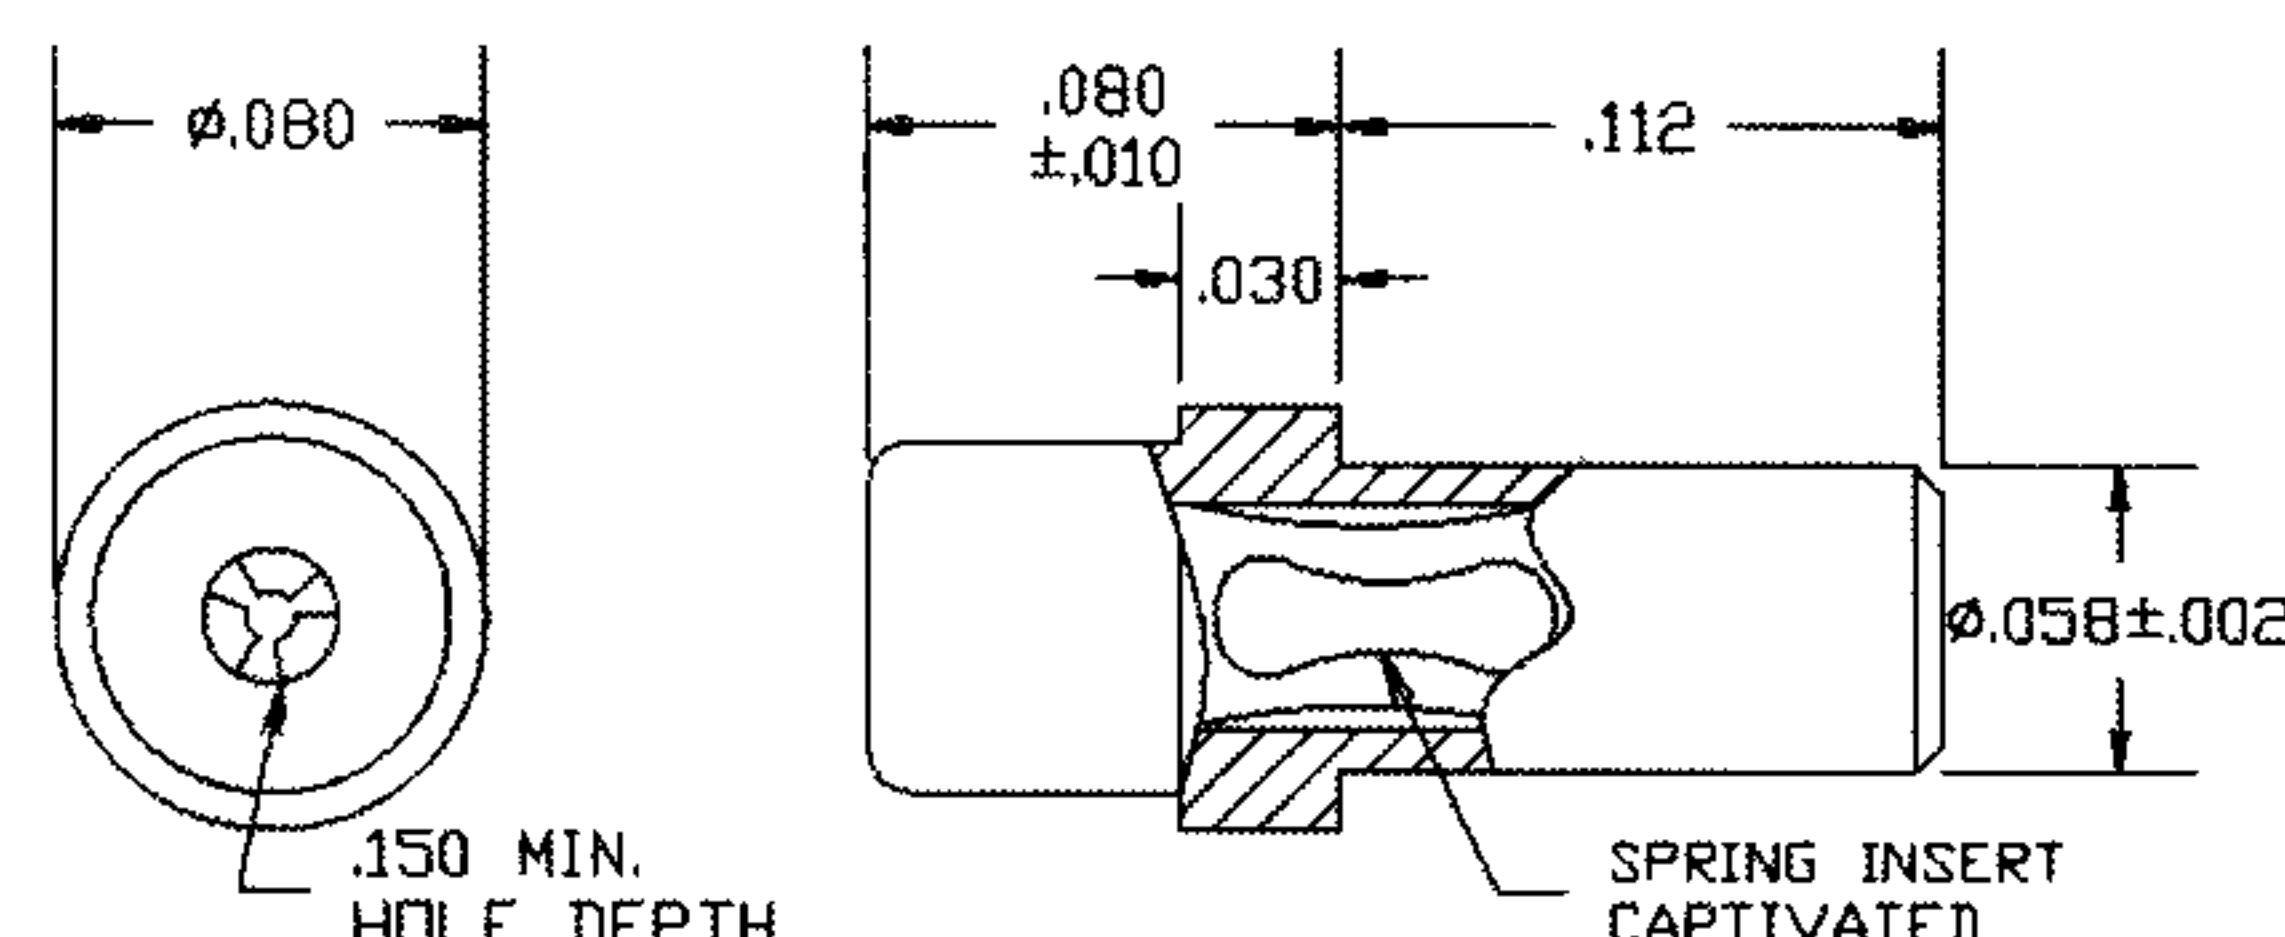


ACCEPTS .025 PIN

BOARD THICKNESS .031 TO .062

RECOMMENDED MOUNTING HOLE .062±.002

09-9017-1-XX P.C. JACK FOR .025 PIN

BASIC PART NO. FINISH

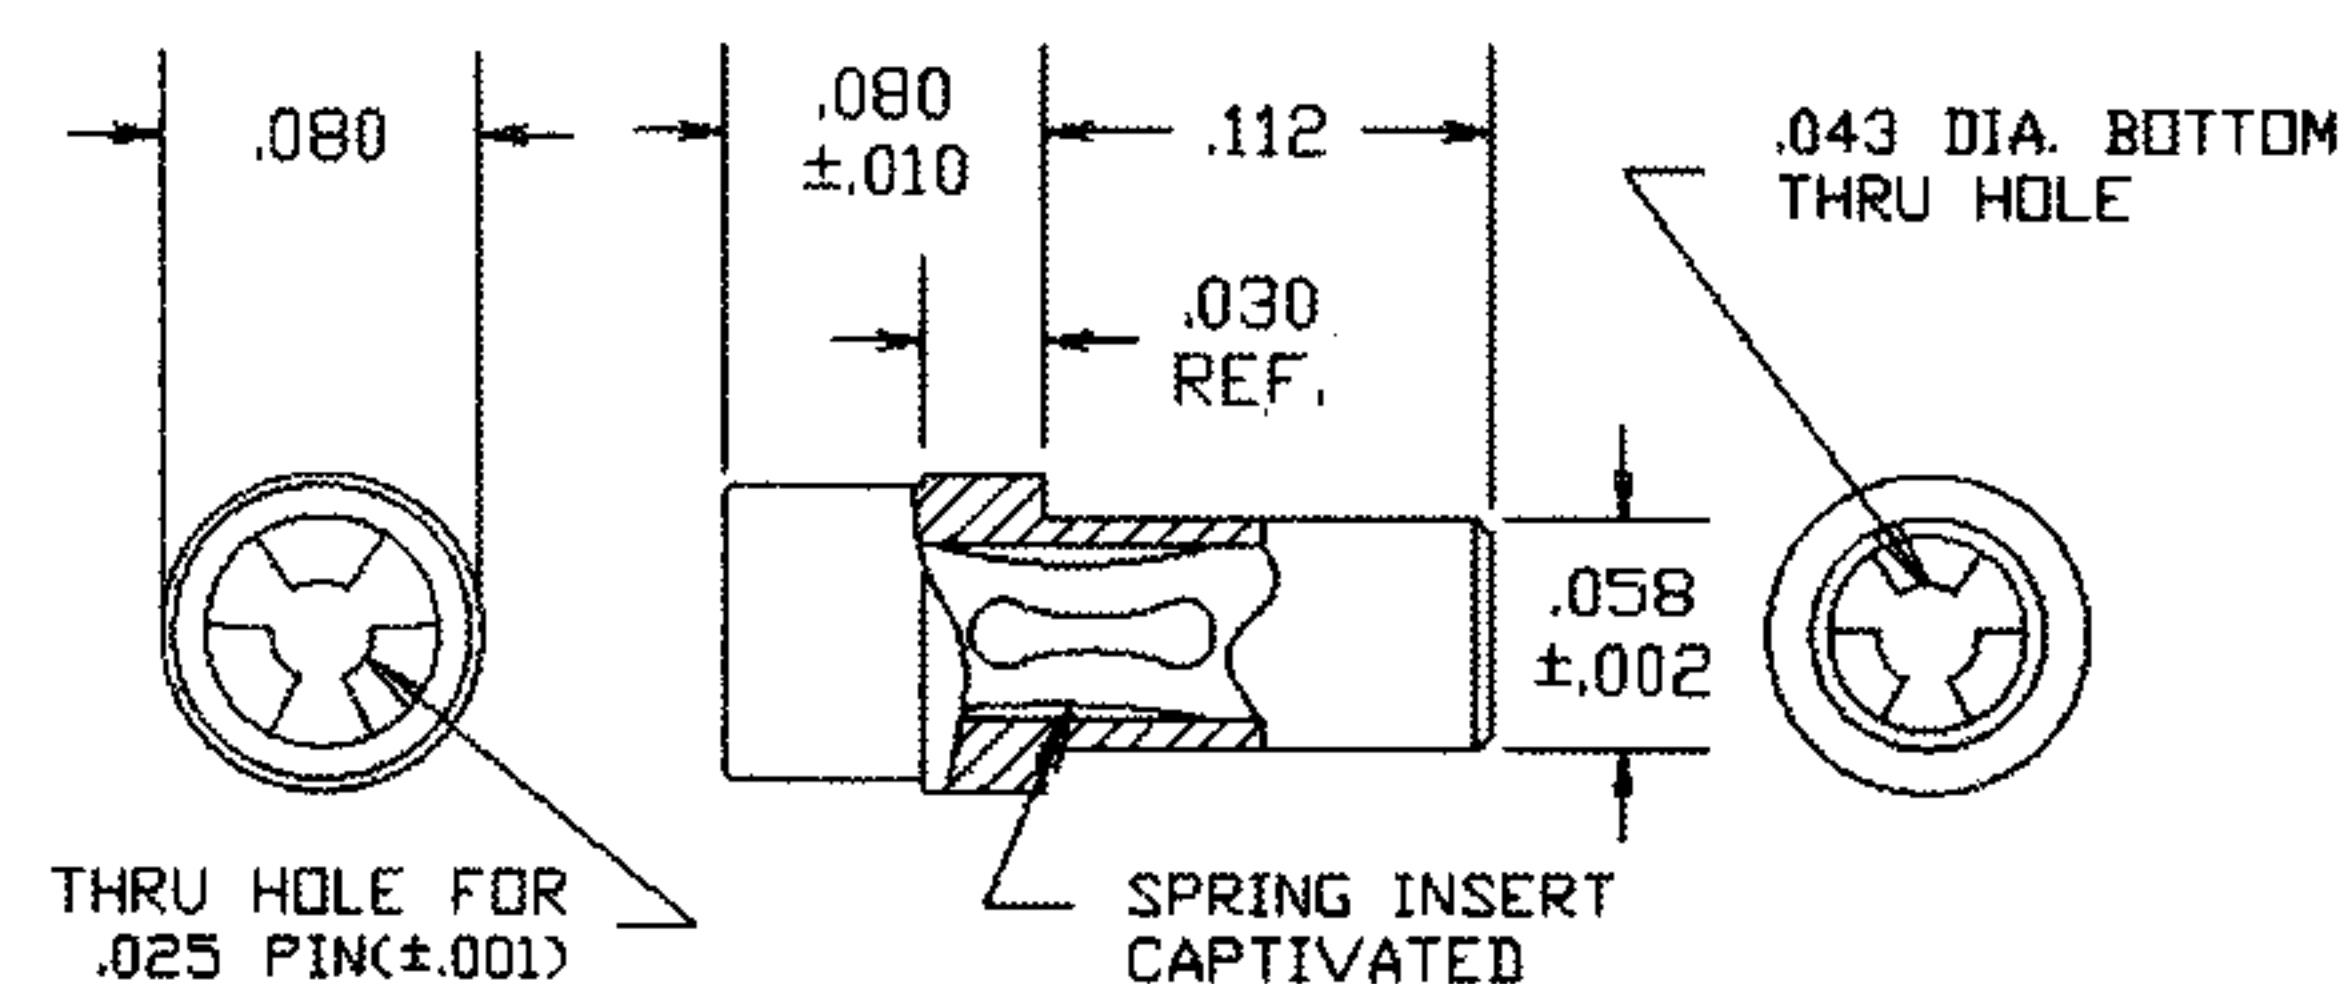

ACCEPTS .025, PIN

BOARD THICKNESS .031 TO .062

RECOMMENDED MOUNTING HOLE .062±.002

MATERIAL

Body: Brass per ASTM B16

Spring Contact: Beryllium Copper per ASTM B194

FINISH

Part Number/Finish Code	Body Finish	Spring Contact Finish
09-9XXX-X-03	Gold per ASTM B488	Gold per ASTM B488
04	Electro-Tin per ASTM B545	Electro-Tin per ASTM B545
06	Electro-Tin per ASTM B545	Gold per ASTM B488
063	Bright Tin-Lead per ASTM B545	Gold per ASTM B488
088	Bright Tin-Lead per ASTM B545	Bright Tin-Lead per ASTM B545

FOR ADDITIONAL SIZES AND MATERIALS, CONTACT FACTORY

800-847-4162 (Outside N.Y.S.)
Ph: 212-777-6571 Fax: 212-991-0161
sales@concord-electronics.com
engineering@concord-electronics.com

CONCORD