
# Axial Disc Magnet 6312008

### **DEXTER BENEFITS AT A GLANCE:**


- > ISO: 9001:2008
- > AS9100C
- > RoHS Compliant
- > Clean Room Class 10000 (ISO7)
- > Patented Magnetic Technology
- > Flexible Manufacturing
- > Magnet and Sensor Integration

| Magnet Characteristics |                   |               |
|------------------------|-------------------|---------------|
| Material               |                   | SmCo          |
| Coating                |                   | None          |
| Diameter (ø)           | mm                | 5.72 +/- 0.05 |
| Thickness (T)          | mm                | 5.72 +/- 0.05 |
| Density (ρ)            | g/cm <sup>3</sup> | 8.4           |
| Mass                   | g                 | 1.23          |

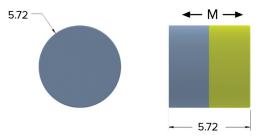

### **Applications & Compatible Encoders**

| Linear Movement  |
|------------------|
| MLX90215EVATC102 |
| MLX90215LVA-BU   |
| MLX90215LVA      |
| MLX90251EVA-2-FA |
| MLX90251EVA-0-BU |
|                  |

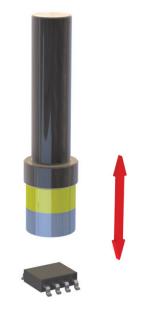

<sup>\*</sup>See application sheet for more information

### **ABOUT DEXTER**

Dexter Magnetic Technologies is the global leader in specification, design and fabrication of magnetic products and assemblies. Since its founding in 1951, solutions designed by Dexter have and continue to positively impact our world daily – from life-saving medical devices to intelligent optics.

As the essential magnetic system partner, our teams of engineers and support staff are dedicated to delivering innovative technological solutions and services through a powerful combination of engineering and manufacturing expertise.



6312008\_09122012\_2

224-366-6629 info@dextermag.com


# Axial Disc Magnet 6312008

### Performance Characteristics

### **DEXTER BENEFITS AT A GLANCE:**

- > ISO: 9001:2008
- > AS9100C
- > RoHS Compliant
- > Clean Room Class 10000 (ISO7)
- > Patented Magnetic Technology
- > Flexible Manufacturing
- > Magnet and Sensor Integration


### Magnetic Field Strength vs. Temperature - Normalized, $25^{\circ}\text{C=}100\%$ 103 102 101 100 Percent 99 98 97 96 95 -25 50 100 125 150




#### **ABOUT DEXTER**

Dexter Magnetic Technologies is the global leader in specification, design and fabrication of magnetic products and assemblies. Since its founding in 1951, solutions designed by Dexter have and continue to positively impact our world daily – from life-saving medical devices to intelligent optics.

As the essential magnetic system partner, our teams of engineers and support staff are dedicated to delivering innovative technological solutions and services through a powerful combination of engineering and manufacturing expertise.

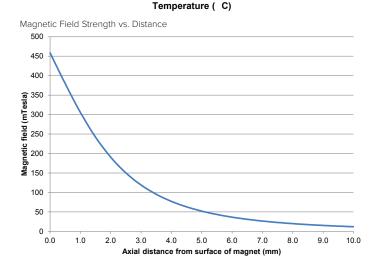

Magnetic Field Variation vs. Tilting Angle

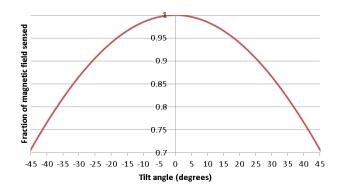



6312008\_09122012\_2