

PL

Extremely Low Impedance, High Reliability

series

ZL

Low Impedance Long Life



Anti-Solvent Feature


- Same case size as PF series, but extremely low impedance as little as 1/2 or PF series.
- High reliability withstanding 5000 hours load life at +105°C (3000/2000 hours for smaller case size as specified below).
- Capacitance ranges available based on the numerical values in E12 series under JIS.

345-1343

PL

Low Impedance

PY 100



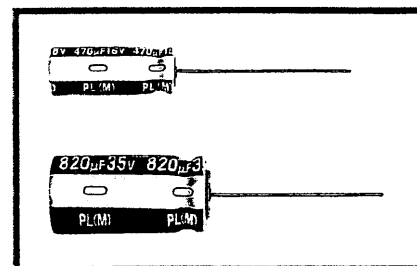


■ Specifications

Item	Performance Characteristics	
Operating Temperature Range	-55~+105°C	
Voltage Range	6.3~63V	
Capacitance Range	0.47~15000 µF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 µA, whichever is greater.	
tan δ	For capacitance of more than 1000 µF, add 0.02 for every increase of 1000 µF. Measurement frequency : 120Hz, Temperature : 20°C	
	Rated voltage(V)	6.3 10 16 25 35 50 63
	tan δ (MAX.)	0.22 0.19 0.16 0.14 0.12 0.10 0.08
Stability at Low Temperature	Measurement frequency : 120Hz	
	Rated voltage(V)	6.3 10 16 25 35 50 63
	Impedance ratio ZT/Z20(MAX.)	Z-55°C / Z+20°C 4 4 3 3 3 2 2
Load Life	After an application of D.C. bias voltage plus the rated ripple current for 5000 hours (2000 hours for D=5 and 6.3, 3000 hours for D=8) at 105°C the peak voltage shall not exceed the rated D.C. voltage, the capacitors meet the characteristic requirements shown on the right.	
	Capacitance change	Within ±20% of initial value
	tan δ	200% or less of initial specified value
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life characteristics listed above. The value of tan δ is, however, 150% or less of initial specified value.	
	Leakage current	
Marking	Printed with white color letter on dark brown sleeve.	
Applicable Standards	JIS C 5141 and JIS C 5102.	

■ Radial Lead Type

Type numbering system (Example : 25V 470 µF φ12.5×15)

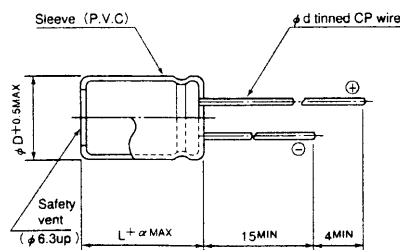

Case size code

Configuration

Type	Code
Small Dia	—
Low Profile	6


φ D	Code
5	DH
6.3	EH
8 ~ 10	PH
12.5 ~ 18	HH

α	(L < 20) 1.5
	(L ≥ 20) 2.0

φ D	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φ d	0.5	0.5	0.6	0.6	0.6*	0.8	0.8

*In case L > 25 for φ 12.5 (D) case sizes, lead diameter φ 0.8 (d) will be applied.

- Frequency coefficient of allowable ripple current (10kHz~200kHz=1)

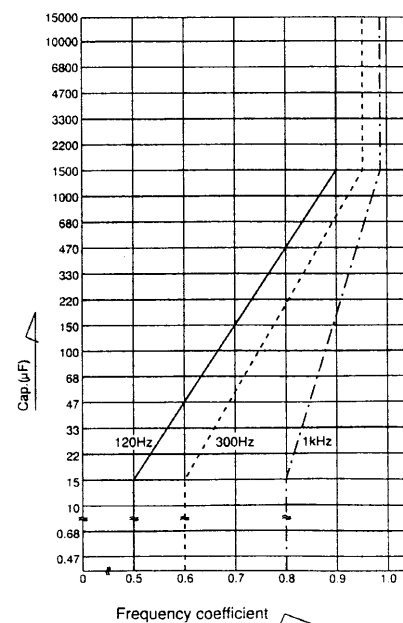

Please refer to page 17, 18, 19 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.

• Dimension table in next pages.

PL series

■Dimensions

DXL (mm)

Capl (μF)	V (Code) Size code	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)		63 (1J)	
		—	6	—	6	—	6	—	6	—	6	—	6	—	6
0.47	R47											5X11			
0.68	R68											5X11			
1	010											5X11			
1.5	1R5											5X11			
2.2	2R2											5X11			
3.3	3R3											5X11			
4.7	4R7											5X11			
6.8	6R8											5X11			
10	100											5X11		5X11	
12	120											5X11		5X11	
15	150											5X11		6.3X11	
18	180											5X11		6.3X11	
22	220									5X11		6.3X11		6.3X11	
27	270									5X11		6.3X11		6.3X11	
33	330							5X11		6.3X11		6.3X11		6.3X15	
39	390							5X11		6.3X11		6.3X11		6.3X15	
47	470					5X11		6.3X11		6.3X11		6.3X15		8X11.5	
56	560					5X11		6.3X11		6.3X11		6.3X15		8X15	10X12.5
68	680			5X11		6.3X11		6.3X11		6.3X15		8X11.5		8X15	10X12.5
82	820			5X11		6.3X11		6.3X11		6.3X15		8X15	10X12.5	8X20	10X15
100	101	5X11		6.3X11		6.3X11		6.3X15		8X11.5		8X20	10X15	10X20	12.5X15
120	121	5X11		6.3X11		6.3X11		6.3X15		8X15	10X12.5	8X20	10X15	10X20	12.5X15
150	151	6.3X11		6.3X11		6.3X15		8X11.5		8X15	10X12.5	10X20	12.5X15	10X25	12.5X15
180	181	6.3X11		6.3X11		6.3X15		8X15	10X12.5	8X20	10X15	10X20	12.5X15	10X31.5	16X15
220	221	6.3X11		6.3X15		8X11.5		8X15	10X12.5	8X20	10X15	10X25	12.5X15	12.5X20	16X15
270	271	6.3X15		6.3X15		8X15	10X12.5	8X20	10X15	10X20	12.5X15	10X31.5	16X15	12.5X25	18X15
330	331	6.3X15		8X11.5		8X15	10X12.5	8X20	10X15	10X20	12.5X15	10X31.5	16X15	12.5X25	18X15
390	391	8X11.5		8X15	10X12.5	8X20	10X15	10X20	12.5X15	10X25	12.5X15	12.5X25	16X15	12.5X31.5	16X20
470	471	8X15	10X12.5	8X15	10X12.5	8X20	10X15	10X20	12.5X15	10X31.5	16X15	12.5X25	18X15	12.5X35.5	16X25
560	561	8X15	10X12.5	8X20	10X15	10X20	12.5X15	10X25	12.5X15	12.5X20	16X15	12.5X31.5	16X20	12.5X40	18X20
680	681	8X20	10X15	8X20	10X15	10X20	12.5X15	10X31.5	16X15	12.5X25	18X15	12.5X35.5	16X20	16X31.5	18X25
820	821	8X20	10X15	10X20	12.5X15	10X25	12.5X15	12.5X20	16X15	12.5X25	18X15	12.5X40	18X20	16X35.5	18X31.5
1000	102	10X20	12.5X15	10X20	12.5X15	10X31.5	16X15	12.5X25	18X15	12.5X31.5	16X20	16X31.5	18X25	16X40	18X35.5
1200	122	10X20	12.5X15	10X25	12.5X15	12.5X20	16X15	12.5X25	18X15	12.5X35.5	16X25	16X35.5	18X31.5	18X40	
1500	152	10X25	12.5X15	10X31.5	16X15	12.5X25	18X15	12.5X31.5	16X20	12.5X40	18X20	16X40	18X31.5		
1800	182	10X31.5	16X15	12.5X20	16X15	12.5X31.5	16X20	12.5X35.5	16X25	16X31.5	18X25	18X35.5			
2200	222	10X31.5	16X15	12.5X25	18X15	12.5X31.5	16X20	12.5X40	18X20	16X35.5	18X31.5	18X40			
2700	272	12.5X25	18X15	12.5X31.5	16X20	12.5X35.5	16X25	16X31.5	18X25	16X40	18X35.5				
3300	332	12.5X25	18X15	12.5X35.5	16X20	12.5X40	18X20	16X35.5	18X31.5	18X40					
3900	392	12.5X31.5	16X20	12.5X40	18X20	16X31.5	18X25	16X40	18X35.5						
4700	472	12.5X35.5	18X20	16X31.5	18X25	16X35.5	18X31.5	18X40							
5600	562	12.5X40	18X20	16X35.5	18X25	16X40	18X35.5								
6800	682	16X31.5	18X25	16X35.5	18X31.5	18X35.5									
8200	822	16X35.5	18X31.5	16X40	18X35.5	18X40									
10000	103	16X40	18X31.5	18X40											
12000	123	18X35.5													
15000	153	18X40													

*In case of low profile type, [6] will be put at 12th digit of type numbering system.

PL series

■ Standard ratings

Cap. (μF)		V (Code) Size code		6.3 (0J)									
				—						6			
				Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)		Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)	
					20℃/100kHz	−10℃/100kHz	105℃/ 10kHz~ 200kHz	105℃/120Hz		20℃/100kHz	−10℃/100kHz	105℃/ 10kHz~ 200kHz	105℃/120Hz
100	101	5×11	0.85	1.70	150	99							
120	121	5×11	0.65	1.30	175	115							
150	151	6.3×11	0.49	0.98	225	155							
180	181	6.3×11	0.39	0.78	250	175							
220	221	6.3×11	0.30	0.60	285	205							
270	271	6.3×15	0.24	0.48	370	275							
330	331	6.3×15	0.20	0.40	405	310							
390	391	8×11.5	0.17	0.34	445	345							
470	471	8×15	0.14	0.28	550	435	10×12.5	0.14	0.28	575	455		
560	561	8×15	0.12	0.24	595	480	10×12.5	0.13	0.26	600	485		
680	681	8×20	0.10	0.20	730	605	10×15	0.11	0.22	700	580		
820	821	8×20	0.085	0.17	795	670	10×15	0.095	0.19	750	635		
1000	102	10×20	0.075	0.15	950	820	12.5×15	0.085	0.17	890	765		
1200	122	10×20	0.065	0.13	1020	895	12.5×15	0.075	0.15	950	835		
1500	152	10×25	0.055	0.11	1220	1090	12.5×15	0.065	0.13	1020	915		
1800	182	10×31.5	0.050	0.10	1370	1230	16×15	0.055	0.11	1270	1140		
2200	222	10×31.5	0.043	0.086	1470	1320	16×15	0.049	0.098	1340	1200		
2700	272	12.5×25	0.038	0.076	1590	1430	18×15	0.044	0.088	1500	1350		
3300	332	12.5×25	0.034	0.068	1710	1530	18×15	0.039	0.078	1600	1440		
3900	392	12.5×31.5	0.031	0.062	1910	1710	16×20	0.036	0.072	1720	1540		
4700	472	12.5×35.5	0.028	0.056	2100	1890	18×20	0.032	0.064	1920	1720		
5600	562	12.5×40	0.026	0.052	2270	2040	18×20	0.030	0.060	1980	1780		
6800	682	16×31.5	0.024	0.048	2370	2130	18×25	0.027	0.054	2210	1980		
8200	822	16×35.5	0.022	0.044	2550	2290	18×31.5	0.025	0.050	2390	2150		
10000	103	16×40	0.020	0.040	2750	2470	18×31.5	0.023	0.046	2490	2240		
12000	123	18×35.5	0.019	0.038	2820	2530							
15000	153	18×40	0.018	0.036	2960	2660							

Cap. (μF)		V (Code) Size code		10 (1A)									
				—						6			
				Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)		Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)	
					20℃/100kHz	−10℃/100kHz	105℃/10kHz~ 200kHz	105℃/120Hz		20℃/100kHz	−10℃/100kHz	105℃/10kHz~ 200kHz	105℃/120Hz
68	680	5×11	0.80	1.60	155	97							
82	820	5×11	0.65	1.30	175	110							
100	101	6.3×11	0.55	1.10	210	135							
120	121	6.3×11	0.44	0.88	235	160							
150	151	6.3×11	0.35	0.70	265	185							
180	181	6.3×11	0.29	0.58	290	205							
220	221	6.3×15	0.24	0.48	370	270							
270	271	6.3×15	0.20	0.40	405	300							
330	331	8×11.5	0.16	0.32	460	350							
390	391	8×15	0.14	0.28	550	430	10×12.5	0.15	0.30	555	430		
470	471	8×15	0.12	0.24	595	475	10×12.5	0.13	0.26	600	475		
560	561	8×20	0.10	0.20	730	590	10×15	0.11	0.22	700	565		
680	681	8×20	0.085	0.17	795	660	10×15	0.090	0.18	770	635		
820	821	10×20	0.070	0.14	985	835	12.5×15	0.080	0.16	920	780		
1000	102	10×20	0.060	0.12	1060	915	12.5×15	0.065	0.13	1040	895		
1200	122	10×25	0.050	0.10	1280	1120	12.5×15	0.060	0.12	1060	930		
1500	152	10×31.5	0.045	0.090	1440	1290	16×15	0.050	0.10	1330	1190		
1800	182	12.5×20	0.039	0.078	1470	1320	16×15	0.044	0.088	1420	1270		
2200	222	12.5×25	0.034	0.068	1710	1530	18×15	0.039	0.078	1600	1440		
2700	272	12.5×31.5	0.030	0.060	1940	1740	16×20	0.035	0.070	1740	1560		
3300	332	12.5×35.5	0.026	0.052	2180	1960	16×20	0.031	0.062	1850	1660		
3900	392	12.5×40	0.024	0.048	2360	2120	18×20	0.028	0.056	2050	1840		
4700	472	16×31.5	0.023	0.046	2420	2170	18×25	0.026	0.052	2250	2020		
5600	562	16×35.5	0.021	0.042	2610	2340	18×25	0.024	0.048	2340	2100		
6800	682	16×35.5	0.020	0.040	2680	2410	18×31.5	0.022	0.044	2540	2280		
8200	822	16×40	0.019	0.038	2820	2530	18×35.5	0.021	0.042	2690	2420		
10000	103	18×40	0.017	0.034	3040	2730							

※ In case of low profile type, [6] will be put at 12th digit of type numbering system.

PL series

■ Standard ratings

Cap. (μF)		V (Code) Size Code Item		16 (1C)									
				—				6					
				Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)		Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)	
					20°C/100kHz	-10°C/100kHz	105°C/10kHz~ 200kHz	105°C/120Hz		20°C/100kHz	-10°C/100kHz	105°C/10kHz~ 200kHz	105°C/120Hz
47	470	5×11		0.80	1.60		155	92					
56	560	5×11		0.65	1.30		175	105					
68	680	6.3×11		0.50	1.00		220	135					
82	820	6.3×11		0.42	0.84		240	155					
100	101	6.3×11		0.35	0.70		265	175					
120	121	6.3×11		0.29	0.58		290	195					
150	151	6.3×15		0.23	0.46		375	260					
180	181	6.3×15		0.20	0.40		405	285					
220	221	8×11.5		0.16	0.32		460	335					
270	271	8×15		0.14	0.28		550	410	10×12.5	0.14	0.28	575	430
330	331	8×15		0.12	0.24		595	455	10×12.5	0.12	0.24	625	480
390	391	8×20		0.10	0.20		730	570	10×15	0.10	0.20	730	570
470	471	8×20		0.090	0.18		770	615	10×15	0.090	0.18	770	615
560	561	10×20		0.075	0.15		950	770	12.5×15	0.080	0.16	920	745
680	681	10×20		0.065	0.13		1020	845	12.5×15	0.070	0.14	985	815
820	821	10×25		0.055	0.11		1220	1030	12.5×15	0.060	0.12	1060	895
1000	102	10×31.5		0.047	0.094		1410	1210	16×15	0.055	0.11	1270	1090
1200	122	12.5×20		0.041	0.082		1430	1250	16×15	0.046	0.092	1390	1220
1500	152	12.5×25		0.036	0.072		1660	1490	18×15	0.041	0.082	1560	1400
1800	182	12.5×31.5		0.032	0.064		1880	1690	16×20	0.037	0.074	1700	1530
2200	222	12.5×31.5		0.028	0.056		2010	1800	16×20	0.033	0.066	1800	1620
2700	272	12.5×35.5		0.025	0.050		2220	1990	16×25	0.030	0.060	2010	1800
3300	332	12.5×40		0.023	0.046		2410	2160	18×20	0.027	0.054	2090	1880
3900	392	16×31.5		0.022	0.044		2470	2220	18×25	0.025	0.050	2290	2060
4700	472	16×35.5		0.020	0.040		2680	2410	18×31.5	0.023	0.046	2490	2240
5600	562	16×40		0.019	0.038		2820	2530	18×35.5	0.022	0.044	2620	2350
6800	682	18×35.5		0.018	0.036		2900	2610					
8200	822	18×40		0.017	0.034		3040	2730					

Cap. (μF)		V (Code) Size Code Item		25 (1E)									
				—				6					
				Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)		Case size φ D×L (mm)	Impedance (Ω MAX)		Allowable ripple (mA rms)	
					20°C/100kHz	-10°C/100kHz	105°C/10kHz~ 200kHz	105°C/120Hz		20°C/100kHz	-10°C/100kHz	105°C/10kHz~ 200kHz	105°C/120Hz
33	330	5×11		0.80	1.60		155	88					
39	390	5×11		0.65	1.30		175	100					
47	470	6.3×11		0.55	1.10		210	125					
56	560	6.3×11		0.44	0.88		235	140					
68	680	6.3×11		0.36	0.72		260	160					
82	820	6.3×11		0.30	0.60		285	180					
100	101	6.3×15		0.24	0.48		370	245					
120	121	6.3×15		0.20	0.40		405	275					
150	151	8×11.5		0.16	0.32		460	320					
180	181	8×15		0.14	0.28		550	390	10×12.5	0.15	0.30	555	395
220	221	8×15		0.11	0.22		625	455	10×12.5	0.13	0.26	600	435
270	271	8×20		0.095	0.19		750	560	10×15	0.11	0.22	700	525
330	331	8×20		0.085	0.17		795	610	10×15	0.095	0.19	750	575
390	391	10×20		0.070	0.14		985	770	12.5×15	0.080	0.16	920	720
470	471	10×20		0.065	0.13		1020	810	12.5×15	0.070	0.14	985	785
560	561	10×25		0.055	0.11		1220	990	12.5×15	0.060	0.12	1060	860
680	681	10×31.5		0.046	0.092		1420	1180	16×15	0.055	0.11	1270	1050
820	821	12.5×20		0.041	0.082		1430	1210	16×15	0.049	0.098	1340	1130
1000	102	12.5×25		0.036	0.072		1660	1430	18×15	0.043	0.086	1520	1310
1200	122	12.5×25		0.032	0.064		1760	1550	18×15	0.039	0.078	1600	1400
1500	152	12.5×31.5		0.029	0.058		1980	1780	16×20	0.034	0.068	1770	1590
1800	182	12.5×35.5		0.026	0.052		2180	1960	16×25	0.031	0.062	1980	1780
2200	222	12.5×40		0.024	0.048		2360	2120	18×20	0.028	0.056	2050	1840
2700	272	16×31.5		0.022	0.044		2470	2220	18×25	0.025	0.050	2290	2060
3300	332	16×35.5		0.020	0.040		2680	2410	18×31.5	0.023	0.046	2490	2240
3900	392	16×40		0.019	0.038		2820	2530	18×35.5	0.021	0.042	2690	2420
4700	472	18×40		0.018	0.036		2960	2660					

*In case of low profile type, [6] will be put at 12th digit of type numbering system.

PL series

Standard ratings

Cap. (μF)		V (Code) Size code Item Code		35 (1V)									
				—						6			
				Case size φ D×L (mm)	Impedance (Ω MAX.)		Allowable ripple (mA rms)		Case size φ D×L (mm)	Impedance (Ω MAX.)		Allowable ripple (mA rms)	
					20℃/100kHz	−10℃/100kHz	105℃/100kHz~ 200kHz	105℃/120Hz		20℃/100kHz	−10℃/100kHz	105℃/100kHz~ 200kHz	105℃/120Hz
22	220	5×11	0.75	1.50	160	85							
27	270	5×11	0.60	1.20	180	99							
33	330	6.3×11	0.49	0.98	225	125							
39	390	6.3×11	0.41	0.82	245	140							
47	470	6.3×11	0.34	0.68	270	160							
56	560	6.3×11	0.28	0.56	295	180							
68	680	6.3×15	0.24	0.48	370	230							
82	820	6.3×15	0.19	0.38	415	265							
100	101	8×11.5	0.16	0.32	460	305							
120	121	8×15	0.14	0.28	550	370	10×12.5	0.15	0.30	555	375		
150	151	8×15	0.12	0.24	595	415	10×12.5	0.12	0.24	625	435		
180	181	8×20	0.10	0.20	730	520	10×15	0.11	0.22	700	500		
220	221	8×20	0.085	0.17	795	580	10×15	0.090	0.18	770	560		
270	271	10×20	0.070	0.14	985	735	12.5×15	0.080	0.16	920	690		
330	331	10×20	0.060	0.12	1060	810	12.5×15	0.065	0.13	1020	780		
390	391	10×25	0.055	0.11	1220	955	12.5×15	0.060	0.12	1060	825		
470	471	10×31.5	0.046	0.092	1420	1130	16×15	0.055	0.11	1270	1010		
560	561	12.5×20	0.041	0.082	1430	1160	16×15	0.048	0.096	1360	1100		
680	681	12.5×25	0.036	0.072	1660	1370	18×15	0.042	0.084	1540	1270		
820	821	12.5×25	0.032	0.064	1760	1490	18×15	0.038	0.076	1620	1370		
1000	102	12.5×31.5	0.029	0.058	1980	1710	16×20	0.034	0.068	1770	1530		
1200	122	12.5×35.5	0.026	0.052	2180	1920	16×25	0.031	0.062	1980	1740		
1500	152	12.5×40	0.024	0.048	2360	2120	18×20	0.028	0.056	2050	1840		
1800	182	16×31.5	0.022	0.044	2470	2220	18×25	0.025	0.050	2290	2060		
2200	222	16×35.5	0.020	0.040	2680	2410	18×31.5	0.023	0.046	2490	2240		
2700	272	16×40	0.018	0.036	2900	2610	18×35.5	0.021	0.042	2690	2420		
3300	332	18×40	0.017	0.034	3040	2730							

Cap. (μF)		V (Code) Size code Item Code		50 (1H)									
										6			
				Case size φ D×L (mm)	Impedance (Ω MAX.)		Allowable ripple (mA rms)		Case size φ D×L (mm)	Impedance (Ω MAX.)		Allowable ripple (mA rms)	
					20℃/100kHz	-10℃/100kHz	105℃/100kHz~ 200kHz	105℃/120Hz		20℃/100kHz	-10℃/100kHz	105℃/100kHz~ 200kHz	105℃/120Hz
0.47	R47	5×11	23.0	46.0	22	11							
0.68	R68	5×11	16.0	32.0	28	14							
1	010	5×11	11.0	22.0	36	18							
1.5	1R5	5×11	7.50	15.0	45	22							
2.2	2R2	5×11	5.00	10.0	54	27							
3.3	3R3	5×11	3.30	6.60	66	33							
4.7	4R7	5×11	2.20	4.40	81	40							
6.8	6R8	5×11	1.80	3.60	91	45							
10	100	5×11	1.40	2.80	115	57							
12	120	5×11	1.20	2.40	125	62							
15	150	5×11	0.93	1.86	145	72							
18	180	5×11	0.80	1.60	155	79							
22	220	6.3×11	0.65	1.30	195	100							
27	270	6.3×11	0.53	1.06	215	115							
33	330	6.3×11	0.43	0.86	240	135							
39	390	6.3×11	0.36	0.72	260	150							
47	470	6.3×15	0.30	0.60	330	195							
56	560	6.3×15	0.25	0.50	360	220							
68	680	8×11.5	0.20	0.40	410	255							
82	820	8×15	0.17	0.34	500	320	10×12.5	0.18	0.36	510	330		
100	101	8×20	0.14	0.28	620	410	10×15	0.16	0.32	580	385		
120	121	8×20	0.12	0.24	670	455	10×15	0.13	0.26	640	435		
150	151	10×20	0.10	0.20	820	570	12.5×15	0.11	0.22	785	545		
180	181	10×20	0.085	0.17	890	635	12.5×15	0.095	0.19	845	605		
220	221	10×25	0.075	0.15	1040	760	12.5×15	0.080	0.16	920	670		
270	271	10×31.5	0.065	0.13	1200	900	16×15	0.070	0.14	1120	840		
330	331	10×31.5	0.055	0.11	1300	995	16×15	0.060	0.12	1210	925		
390	391	12.5×25	0.048	0.096	1440	1120	16×15	0.055	0.11	1270	990		
470	471	12.5×25	0.044	0.088	1500	1190	18×15	0.046	0.092	1470	1170		
560	561	12.5×31.5	0.040	0.080	1680	1360	16×20	0.044	0.088	1550	1260		
680	681	12.5×35.5	0.036	0.072	1850	1530	16×20	0.040	0.080	1630	1350		
820	821	12.5×40	0.033	0.066	2010	1700	18×20	0.036	0.072	1810	1530		
1000	102	16×31.5	0.030	0.060	2120	1830	18×25	0.033	0.066	2000	1730		
1200	122	16×35.5	0.028	0.056	2260	1990	18×31.5	0.031	0.062	2140	1880		
1500	152	16×40	0.026	0.052	2410	2170	18×31.5	0.029	0.058	2220	1990		
1800	182	18×35.5	0.025	0.050	2460	2210							
2200	222	18×40	0.024	0.048	2560	2300							

※In case of low profile type, [6] will be put at 12th digit of type numbering system.

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

PL series

Standard ratings

Cap. (μF)		V (Code) Size code		63 (1J)				6			
				Impedance (Ω MAX.)		Allowable ripple (mA rms)		Impedance (Ω MAX.)		Allowable ripple (mA rms)	
				Case size φ D × L (mm)		Case size φ D × L (mm)		Case size φ D × L (mm)		Case size φ D × L (mm)	
				20°C/100kHz	-10°C/100kHz	105°C/10kHz~ 200kHz	105°C/120Hz	20°C/100kHz	-10°C/100kHz	105°C/10kHz~ 200kHz	105°C/120Hz
10	100	5×11		1.06	2.12	135	67				
12	120	5×11		0.93	1.86	145	72				
15	150	6.3×11		0.73	1.46	185	92				
18	180	6.3×11		0.63	1.26	195	100				
22	220	6.3×11		0.52	1.04	215	110				
27	270	6.3×11		0.43	0.86	240	130				
33	330	6.3×15		0.35	0.70	305	170				
39	390	6.3×15		0.30	0.60	330	190				
47	470	8×11.5		0.25	0.50	365	215	10×12.5	0.23	0.46	450
56	560	8×15		0.21	0.42	450	275	10×12.5	0.19	0.38	495
68	680	8×15		0.17	0.34	500	315	10×15	0.16	0.32	580
82	820	8×20		0.15	0.30	600	385	10×15	0.14	0.28	695
100	101	10×20		0.12	0.24	750	495	12.5×15	0.12	0.24	750
120	121	10×20		0.10	0.20	820	555	12.5×15	0.095	0.19	845
150	151	10×25		0.090	0.18	950	665	12.5×15	0.080	0.16	1050
180	181	10×31.5		0.075	0.15	1110	790	16×15	0.070	0.14	1120
220	221	12.5×20		0.065	0.13	1140	835	16×15	0.060	0.12	1290
270	271	12.5×25		0.055	0.11	1340	1000	18×15	0.050	0.10	1410
330	331	12.5×25		0.049	0.098	1420	1090	18×15	0.047	0.094	1500
390	391	12.5×31.5		0.043	0.086	1620	1260	16×20	0.042	0.084	1700
470	471	12.5×35.5		0.039	0.078	1780	1420	16×25	0.039	0.078	1730
560	561	12.5×40		0.035	0.070	1950	1580	18×20	0.035	0.070	1940
680	681	16×31.5		0.032	0.064	2050	1700	18×25	0.032	0.064	2110
820	821	16×35.5		0.029	0.058	2220	1880	18×31.5	0.029	0.058	2280
1000	102	16×40		0.027	0.054	2370	2050	18×35.5	0.027	0.054	2510
1200	122	18×40		0.025	0.050	2510	2210				

※In case of low profile type, [6] will be put at 12th digit of type numbering system.