

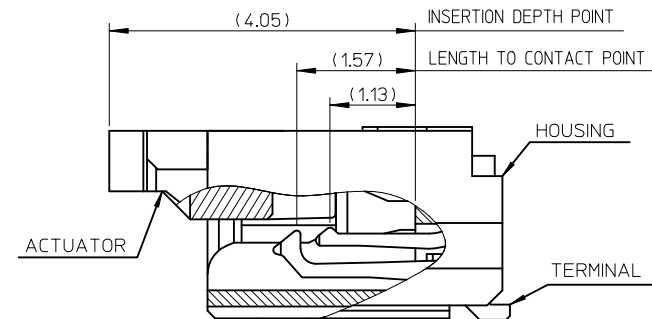
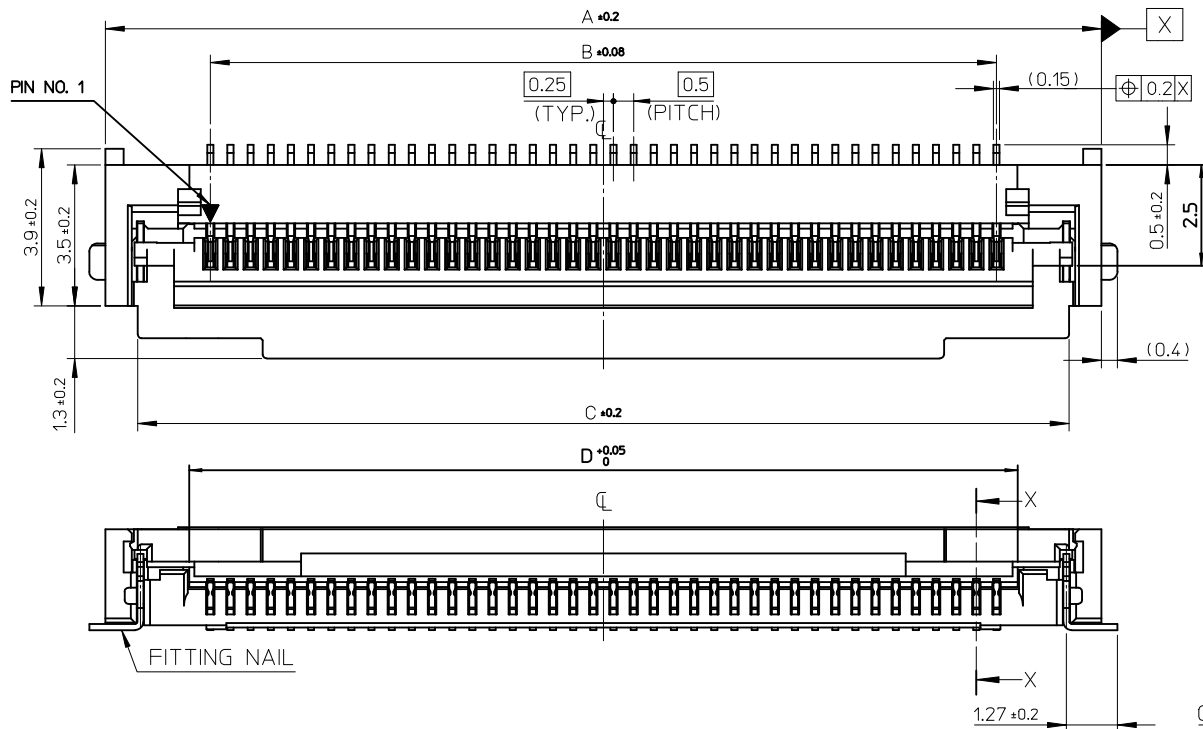




SECTION X-X
Scale 15:1



NOTES

1. MATERIAL

HOUSING LIQUID CRYSTAL POLYMER
GLASS FILLED,UL94V-0(BEIGE)

ACTUATOR PPS GLASS FILLED, UL94V-0(BLACK)

TERMINAL PHOSPHOR BRONZE
(t=0.15)

FITTING NAIL PHOSPHOR BRONZE

2. PLATING

TERMINAL

CONTACT AREA : SEPARATED GOLD PLATING

(0.05 MICROMETER MINIMUM)

SOLDER TAIL AREA : SEPARATED GOLD PLATING

UNDERPLATE : NICKEL OVERALL

(1.0 MICROMETER MINIMUM)

FITTING NAIL

TIN PLATING (1.0 MICROMETER MIN.)

UNDER PLATING : NICKEL PLATING

(1.0 MICROMETER MIN.)

3. IN THE PACKAGE, ACTUATOR OF
PART 104060-**-10 SHOULD BE CLOSED.

4. FITTING NAIL FOR PREVENTION OF
PEELING OF P.C.B. PATTERN.

5. R0.3 MUST NOT BE OVERLAPPED
TO PATTERN OF FPC/FFC.

6. N: CIRCUIT.

7. ELV AND RoHS COMPLIANT

8. TAILS AND NAILS COPLANALITY
TO BE 0.1mm MAX.

40.55	43.1	39.5	44.7	104060-8010	104060-8017	80
30.55	33.1	29.5	34.7	104060-6010	104060-6017	60
D	C	B	A	MATERIAL NO.	EMBOSSED PACKAGE	CIRCUIT

CONNECTOR SERIES No. 104060-**-10

SCALE
1:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

0.5 FFC E/O DUAL CONTACT
HOUSING ASS'Y



MOLEX INCORPORATED

DOCUMENT NO.

SD-104060-001

SHEET NO.

1 OF 3

SEE TABLE

SIZE
A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

NEW RELEASED EC NO: KOR2010-0190 DRWN:HYOU CHKD:KIM APPR:YUNSIKIM	2010/06/09	2010/06/09	2010/06/09
	2010/06/09	2010/06/09	2010/06/09
	2010/06/09	2010/06/09	2010/06/09
	2010/06/09	2010/06/09	2010/06/09
QUALITY SYMBOLS	DESCRIPTION	REV	DATE
▽=0			
◇=0			

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± 0.3	± ---

ANGULAR ± 1 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

MM ONLY

DRAWN BY	DATE
YR.KIM	2009/06/26
CHECKED BY	DATE
YS00.KIM	2009/06/26
APPROVED BY	DATE
YS00.KIM	2009/06/26
MATERIAL NO.	

10 9 8 7 6 5 4 3 2 1

F

E



D

C

B

A



ib_frame_A3_P_ME_T
Rev. E 2006/04/15

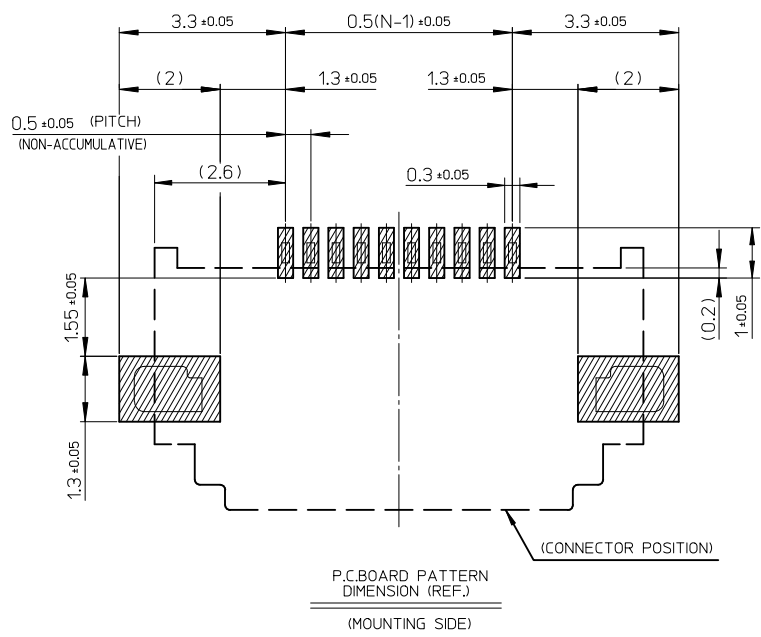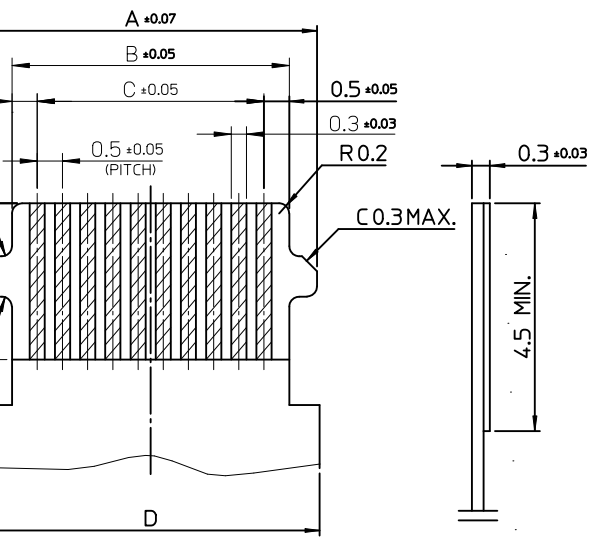

42.3	39.5	40.5	42.2	80
32.3	29.5	30.5	32.2	60
D	C	B	A	CIRCUIT


NEW RELEASED EC NO: KOR2010-0190 DRWN:HYOU CHKD:YS.KIM APPR:YUNSIKKIM	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY YR.KIM	DATE 2009/06/26	TITLE 0.5 FFC E/O DUAL CONTACT HOUSING ASS'Y			
			4 PLACES	± ---	± ---	CHECKED BY YS00.KIM	DATE 2009/06/26	MOLEX INCORPORATED			
			3 PLACES	± ---	± ---	APPROVED BY YS00.KIM	DATE 2009/06/26				
			2 PLACES	± ---	± ---	MATERIAL NO.		DOCUMENT NO.	SHEET NO.		
			1 PLACE	± 0.3	± ---	SEE TABLE		SD-104060-001	2 OF 3		
			ANGULAR ± 1 °								
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9 8 7 6 5 4 3 2 1

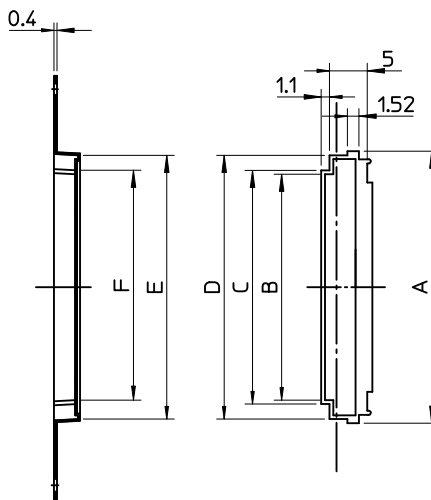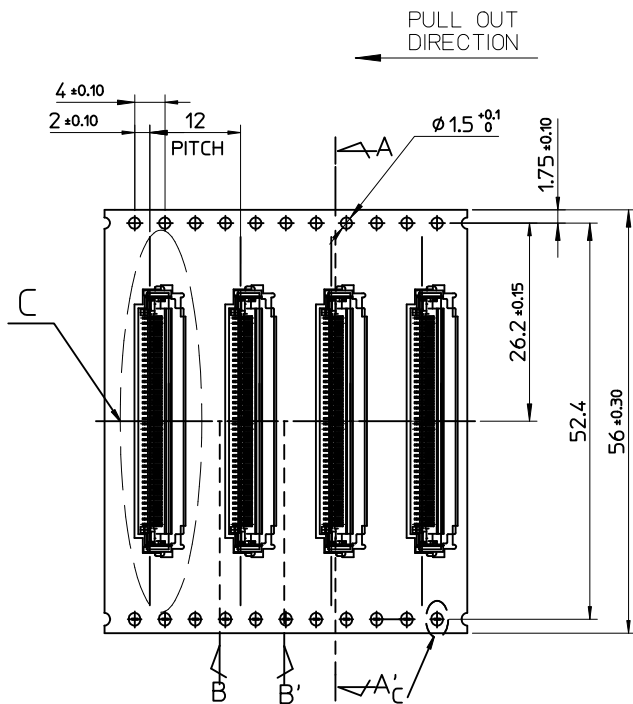


SECTION A-A'

DETAIL C

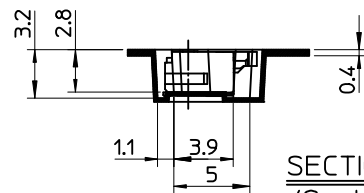

SECTION B-B'
(Scale 2/1)




Detail C
(S=5:1)

NOTES

1. NUMBER OF CONNECTORS : 2,400PCS/REEL

2. LEAD TAPE LENGTH

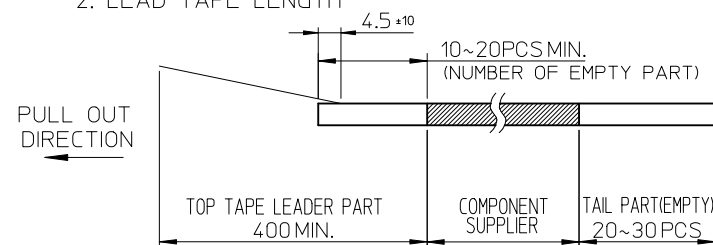


3. FOR DIMENSIONS OF PRODUCT, REFER TO SD-104060-001.

4. MATERIAL

CARRIER TAPE : POLYETHYLENE TEREPHTHALATE
TOP TAPE : POLYETHYLENE TEREPHTHALATE , POLYETHYLENE
REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>

5. ELV AND RoHS COMPLIANT

6. PEELING OFF FORCE OF COVER TAPE : 0.1N~0.59N(10.2GF~60GF)
(PEELING DIRECTION AS SHOW IN FOLLOW FIG.)
PEELING OFF SPEED : 300mm/Min.(Ref.)



35902-0021	104060-8099	40.9	44.9	44.9	40.9	40	46	104060-8017	80
35902-0021	104060-6099	30.9	34.9	34.9	30.9	30	36	104060-6017	60
COVER TAPE	EMBOSS TAPE	F	E	D	C	B	A	MATERIAL NO.	CIRCUIT

NEW RELEASED EC NO: KOR2010-0190 DRWN: HYOU CHKD:KS.KIM APPR: YUNSIKKIM 2010/06/09 2010/06/09 2010/06/09	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION 			
				mm	INCH	DRAWN BY YR.KIM	DATE 2009/06/26	TITLE 0.5 FFC E/O DUAL CONTACT HOUSING ASS'Y				
			4 PLACES	± ---	± ---	CHECKED BY YS00.KIM	DATE 2009/06/26					
			3 PLACES	± ---	± ---	APPROVED BY YS00.KIM	DATE 2009/06/26					
			2 PLACES	± ---	± ---	MOLEX MOLEX INCORPORATED		DOCUMENT NO. SD-104060-001 SHEET NO. 3 OF 3				
			1 PLACE	± 0.3	± ---							
ANGULAR ± 1 °			MATERIAL NO.									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3		SEE TABLE THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							